
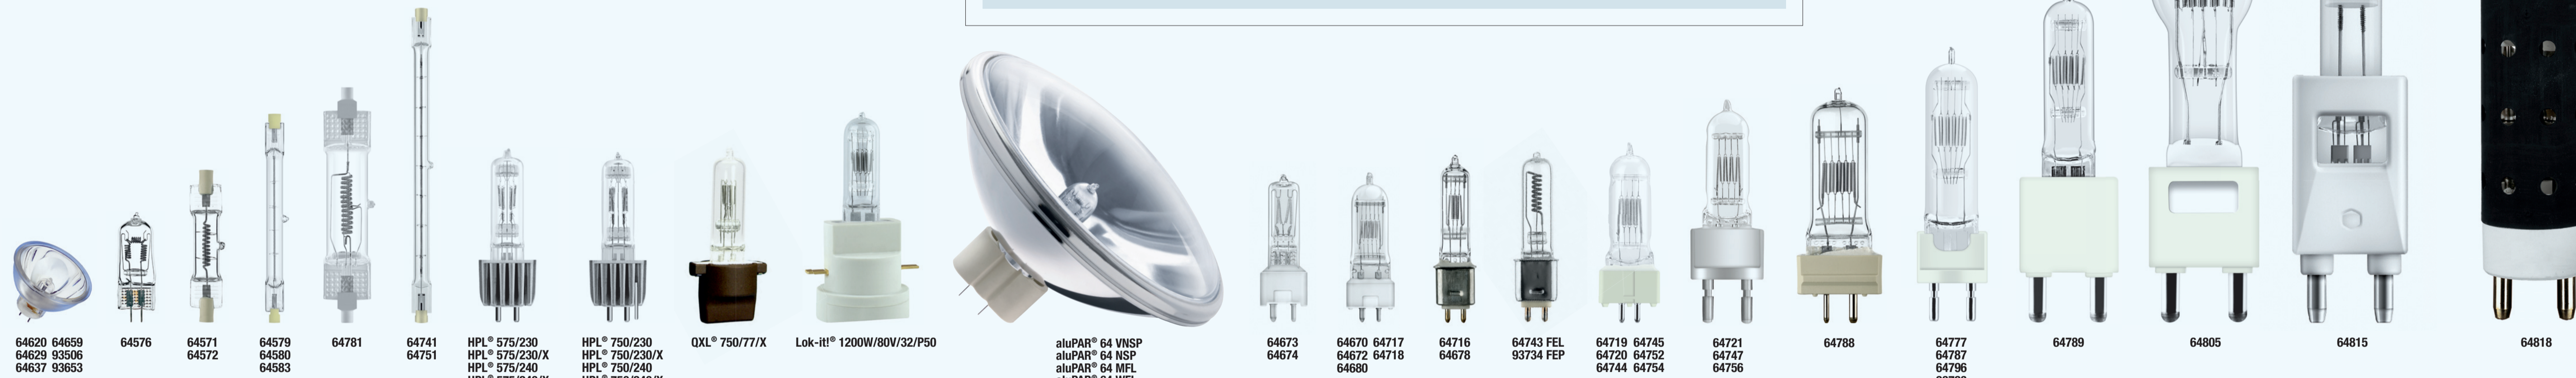


Product reference	ANSI	LIF	Wattage W	Voltage V	Base	Lumens lm	Lifetime h	Color temp. K	Length max. mm	LCL mm
Single-ended halogen lamps										
64673	-	CP/81	300	230/240	GY9.5	7500	200	3050	80	46.5
64670	GCV	T/25	500	230/240	GY9.5	11000	300	3000	90	46.5
64672	-	M/40	500	230/240	GY9.5	8500	2000	2900	85	46.5
64674	-	CP/82	500	230/240	GY9.5	13500	200	3200	90	46.5
64680	-	A1/244	500	230/240	GY9.5	14500	50	3200	75	36.5
64716	GKV	-	600	230/240	G9.5	13500	250	3050	101	60.5
64717	FRL/FRM	CP/89	650	230/240	GY9.5	16250	150	3200	90	46.5
64718	GCT	T/27	650	230/240	GY9.5	14500	400	3000	90	46.5
64719	-	T/12	650	230	G9.5	12000	750	3000	110	55
64720	-	CP/23	650	230	G9.5	16800	100	3000	110	55
64721	FKH	CP/39	650	230	G22	16800	100	3200	140	63.5
64678	-	-	800	230	G9.5	20000	250	3200	101	60.5
64576	-	P2/17	1000	230	GX8.35	28000	75	3250	67.5	45
64743	FEL	-	1000	120	G9.5	27500	300	3200	101	60.3
64744	FWP	T/19	1000	230/240	G9.5	20500	750	3000	110	55
64745	FVA	CP/70	1000	230/240	G9.5	26000	200	3200	110	55
64747	FKJ	CP/71	1000	230/240	G22	26000	200	3200	140	63.5
93734	FEP	CP/77	1000	240	G9.5	23000	150	3200	102	60.3
64752	FWS	T/29	1200	230/240	G9.5	29300	400	3000	125	67
64754	-	CP/90	1200	230	G9.5	30000	200	3200	125	67
64756	-	CP/93	1200	230	G22	30000	200	3200	140	63.5
64777	-	CP/92	2000	230	G22	52000	400	3200	175	90
64787	-	CP/75	2000	230	G22	52000	400	3200	160	75
64788	FTM	CP/72	2000	230/240	GY16	52000	400	3200	145	70
64789	FKK	CP/73	2000	230/240	G38	52000	400	3200	210	127
64796	-	CP/91	2500	230	G22	65000	400	3200	175	90
64805	-	CP/85	5000	230/240	G38	135000	400	3200	279	165
64815	ECR	CP/83	10000	230	G38	285000	300	3200	400	254
64818	BCM	CP/99	20000	230	G38	580000	400	3200	550	354

Product reference	ANSI	LIF	Wattage W	Voltage V	Base	Lumens lm	Lifetime h	Color temp. K	Length max. mm	LCL mm
Halogen lamps with special bases										
HPL® 575/230	-	-	575	230/240	2-pin	14900	400	3200	104	60.3
HPL® 575/230/X	-	-	575	230/240	2-pin	11780	1500	3050	104	60.3
HPL® 750/230	-	-	750	230/240	2-pin	19750	400	3200	104	60.3
HPL® 750/230/X	-	-	750	230/240	2-pin	15600	1500	3050	104	60.3
93723	-	-	1200	80	G22	37500	250	3200	120.7	63.5
QXL® 750/77/X	-	-	750	77	bayonet	18000	1500	3050	104	38
Lok-It!® 1200W/80V/32/P50	-	-	1200	80	PGJX50	37500	250	3200	129.5	84

Product reference	ANSI	LIF	Wattage W	Voltage V	Base	Lumens lm	Lifetime h	Color temp. K	Length max. mm	LCL mm
Double-ended halogen lamps										
64571	DXX	P2/13	800	230/240	R7s	20800	75	3200	80.3	-
64572	-	P2/35	1000	230	R7s	25000	150	3200	94	-
64579	FDG	-	1000	120	R7s	35000	15	3400	127.1	-
64580	-	P1/12	1000	230/240	R7s	36000	15	3400	127.1	-
64583	-	P2/20	1000	230/240	R7s	33000	200	3200	119.6	-
64741	EKM	P2/7	1000	230/240	R7s	28000	200	3200	191.1	-
64751	ELN	P2/12	1250	230/240	R7s	36250	200	3200	191.1	-
64781	FEX	P2/27	2000	230/240	RX7s	50000	300	3200	142.8	-

Product reference	ANSI	LIF	Wattage W	Voltage V	Base	Luminous intensity cd	Average lifetime h	Length max. mm	Diameter mm
aluPAR® 64, 3200 K									
aluPAR® 64 VNSP	EXC	CP/60	1000	230/240	GX16d	350000	300	150	204
aluPAR® 64 NSP	EXD	CP/61	1000	230/240	GX16d	255000	300	150	204
aluPAR® 64 MFL	EXE	CP/62	1000	230/240	GX16d	138000	300	150	204
aluPAR® 64 WFL	EXG	-	1000	230/240	GX16d	38000	300	150	204
Low-voltage reflector lamps, MR16									
64629	EFP-6	-	100	12	GZ6.35	-	600	42	51
64637	EBV	A1/271	100	12	GZ6.35	-	1500	42	51
64620	EFR-5	-	150	15	GZ6.35	-	500	42	51
64659	ELC-10	-	250	24	CX5.3	-	1000	44.5	51
93653	ELC-3	-	250	24	CX5.3	-	300	44.5	51
93506	ENH	-	250	120	GY5.3	-	175	44.5	51

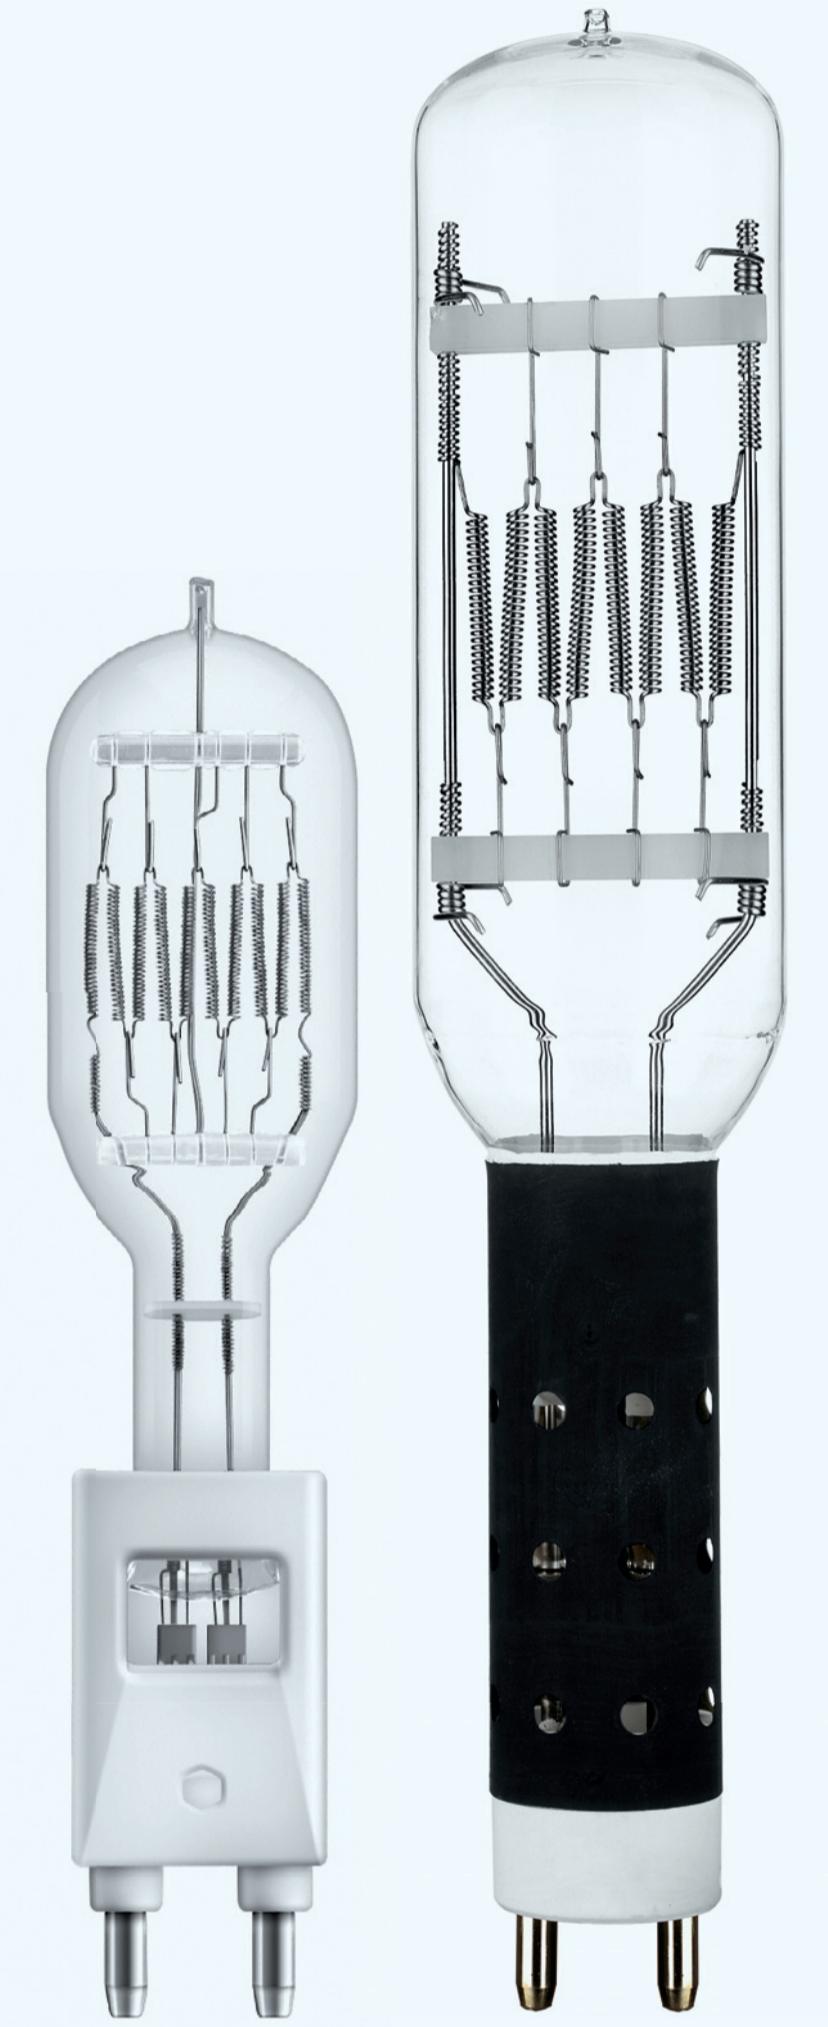

The real showmasters

OSRAM studio lamps – the highest standard in studio, stage and TV lighting

SEE THE WORLD IN A NEW LIGHT

