

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4th Floor of Building 2, 4th Floor of Building 3, 1st to 4th Floor of Building 4,
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

TEL: +86-(0)755-25701197, 25726373

FAX: +86-(0)755-25723423

Email: godox@godox.com

www.godox.com



CONTINUOUS LIGHTING




EMBRACE CREATIVE POSSIBILITIES

At Godox, we believe every creative idea worth exploring. That's why Godox is always with the creative minds, providing them with tools they need to explore their creativity, start their business, and pursue their dreams.

Since 1993, Godox has been dedicated to developing and delivering great and accessible lighting and audio solutions for photographers, videographers, filmmakers, and all potential creators. Godox is always moving forward to push the boundaries of technology. Adhere to our mission, Godox constantly brings innovative and professional products to the industries.

Embrace creative possibilities as more than just a tagline, we hope to empower every creative mind from every corner of the world, regardless of different careers or cultural backgrounds, giving them a chance to explore, create, express, and inspire the world.

CONTENTS

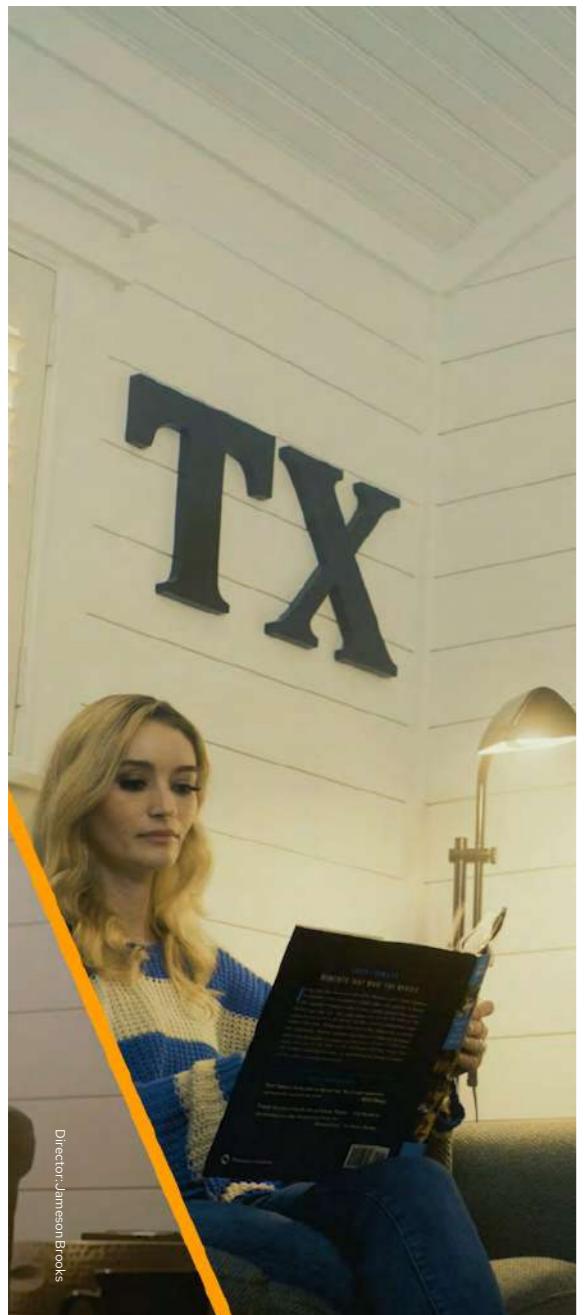

05 • COB Lights

ML60IIBi/ML100Bi/ML100R
ML80Bi/ML150Bi
SL60IID/SL60IIBi
SL100D/SL100Bi
SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi
SL150R/300R

19 • RS Series

RS60R/RS60Bi
RS100R/RS100Bi

25 • Focusing Lights

S60Bi

29 • Panel Lights

UP150R
P260C Pro
LDP8D/LDP8Bi/LDP18D/LDP18Bi
LDX50R/LDX50Bi/LDX100R/LDX100Bi
LED1000IID/LED1000IIBi
LEDPI20C/LEDPI260C

39 • Foldable LED Mat

FH50R/FH50Bi
FL100R/FL200R/FL200SR
FL60/FL100/FL150S/FL150R

45 • Hybrid Flash LED Lights

FV150/FV200
LF308

49 • RGBWW Tube Lights

TL30
TL60
TL120
TL180

58 • Light Sticks

LC500mini/LC500Rmini
LC500R(RGBWW)
LC500
LC1000R/LC1000Bi

63 • Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(RGBWW)

67 • Streaming Lights

ES30
ES45
LR120/LR150
LR160/LR180

74 • Waterproof Lights

WL4B
WL8P

77 • Smartphone Lightings

MA5R

AM01

R1 (RGBWW)
M1 (RGBWW)
LEDM32/LEDM150

83 • LITEMONS Series

LE200Bi/LE300Bi/LE600Bi
LA600R/LA600Bi
LA150R/LA200R/LA300R/LA300Bi
LA150D/LA150Bi/LA200D/LA200Bi
LP400R/LP600R/LP1200R/LP400Bi/LP600Bi/LP1200Bi
C30Bi/C30R
LED6R(RGBWW)/LED6Bi

99 • Godox Control

APP Control
Remote Control
Wireless DMX Control

103 • Lens&Gobos

Fresnel Lens System
Spotlight Attachment
Projection Attachment
Projection Attachment Adapter

111 • Accessories

Softbox Series
Collapsible Lantern
Lighting Stands & Mounting
Carrying Bags

COB LIGHTS





ML60IIBi

22500Lux 5600K
@1m with standard reflector2800K-6500K
CRI 96+CRI 96+
TLCI 97+

TLCI 97+

526G
Lightweight11 FX Effects
Godox Light APP ControlCharging Case
Powered by AC/DC

Key Features

- Super Lightweight & Compact Design
- One-Handed Outdoor Gear
- Smaller Bag Carrying Bigger Convenience
- high CRI/TLCI at 96+/97+
- 2800-6500K Color Temperature Range
- Upgraded Lamp Beads for Stunning Brightness
- 11 built-in FX effects
- Fuel Creativity With Versatile Accessories
- Adaptable Lighting in Any Space
- APP Control

Tech Specs

Model	ML60IIBi
Power Supply	20V≈3.5A
Input Power	Max. ≈70W
Brightness Range	0%-100%
CRI	Average≥96
TLCI	Average≥97
CCT	2800-6500K
FX Type	11
Bluetooth Control Distance	Max.30m
Working Environment Temperature	-10°C ~+40°C
Dimension	3.46" * 3.62" * 4.38"
Net Weight	≈526g (Lamp Head Protective Cover Included)

Optional Purchase



ML60IIBi Kit 1

Light Body	×1	Adapter	×1
Reflector	×1	Lamp Head Protective	
AD-E2 Bracket	×1	Cover	×1
Carry Bag	×1	AK-B01NP-F Battery	
AC Power Cord	×1	Accessory Kit	×1



ML60IIBi Kit 2

Light Body	×1	Adapter	×1
Reflector	×1	Lamp Head Protective	
AD-E2 Bracket	×1	Cover	×1
Carry Bag	×1	AK-B02 V-Mount Battery	
AC Power Cord	×1	Accessory Kit	×1

Portable LED Video Light

ML100Bi



ML100Bi



CRI
97+

34300Lux
5600K@1m
with ML-L15



TLCI
98+

TLCI 98+



487g

2800K-6500K



Lightweight



11 FX Effects



Godox Light APP
Control



Type-C
Power Supply



AC/DC
Power Supply



Godox Mount

Full Color LED Video Light

ML100R



ML100R



Compact & Portable



Full Color



Fun-packed
Accessories



Versatile Power
Options



Godox Mount

Key Features

- Weighs Only 487g
- 34,300lux @1m with Lens Reflector
- Wide CCT Range: 2800-6500K
- Portable Brilliance in Pocket-sized Design
- Diverse Power Supply: DC/USB-C/V-mount Battery
- Comprehensive Accessory System with Godox Mount
- Seamless Workflow with Godox Light App

Optional Purchase



ML100Bi (With Carry Bag)

Light Body	x1	AC Power Cord	x1
Lens Reflector ML-L15	x1	Holder AD-E2	x1
Adapter	x1	Storage Bag	x1
Lamp Head Protective Cover	x1		



ML100Bi Kit2



ML100Bi Kit1

Light Body	x1	Lens Reflector ML-L15	x1	Light Body	x1	AC Power Cord	x1
Mini Tripod MTO1	x1	Storage Bag	x1	Lens Reflector ML-L15	x1	V-mount Battery Accessory	x1
Power Bank Holder		AC Power Cord	x1	Holder AD-E2		Kit AK-B02	
PH01 Adapter	x1	Lens Reflector ML-L36	x1	Adapter	x1	Storage Bag	x1
Holder AD-E2	x1	Lamp Head Protective Cover	x1	Lens Reflector ML-L36	x1	Lamp Head Protective Cover	x1

The ML100R is a lightweight, full-color light with versatile features. It offers portable light-shaping accessories, mobile power options, and innovative mixing technology. With full-color adjustability, it enables limitless creativity, making it ideal for filmmakers and content creators who need mobility and flexibility.



Key Features

- Innovative mixing technology for vibrant, accurate color
- Wide color temperature: 1800K-10000K
- Godox-Mount Ecosystem for seamless accessory integration
- Compact & portable design for easy mobility
- 5 power solutions for flexible operation
- New creative accessories: collapsible fresnel and air soft tube

Tech Specs

Model	ML100R
DC Input Port	20V=6A
	Input Power≈110W
CCT	1800K-10000K
Brightness Range	0%-100%
Dimming Curves	linear, S-curve, exponential, logarithmic
FX Mode	14
CRI	≈95
TLCI	≈95
Controlling Methods	Bluetooth app/light body control
Bluetooth Controlling Distance	30m
Working Environment Temperature	-10°C~40°C
Dimension of Bare Light	≈4.8" * 1.81" * 4.33"
Net Weight of Bare Light	≈465g

ML Series LED Light

ML80Bi/ML150Bi



ML80Bi/ML150Bi



Modular Design



Cable-Free Power Options



Magnetic Diffuser Kit



Godox Mount



Beam Zooming



NFC Addition

Key Features

- Modular Design for Smarter Solutions
- ML80Bi: 29600lux @1m/ML150Bi: 61054lux @1m (with ML-Z (spot)/5600K)
- Zoom Lens Reflector ML-Z
- Brand New Magnetic Accessories
- 3 Cable-Free Power Options
- Godox Mount Compatibility
- Compact and Portable
- NFC Addition and App/DMX Control

Tech Specs

Model	ML80Bi	ML150Bi
Battery(ML-BA)	DC14.4V, 6600mAh, 95.04Wh	/
USB-C Charging		
Port Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A		
DC Input Port	20V=6A	36V=4.6A(Max.)
USB-C Input Port	12V=1.5A, 15V=3A, 20V=5A	/
CCT Range	2800K-6500K	2800K-6500K
Brightness Range	0%-100%	0%-100%
FX Modes	11	11
CRI	≈96	≈96
TLCI	≈96	≈96
Controlling Methods	Bluetooth app/light body	Wired DMX/RDM, Bluetooth App, Light Body
Bluetooth Controlling Distance	30m	30m
Working Environment	-10°C~40°C	-10°C~40°C
Temperature		
Dimension of Bare Light	≈3.78" * 3.58" * 2.91"	≈3.58" * 4.53" * 3.58"
Net Weight of Bare Light	≈519g/1.14lb	≈770g/1.70lb

Optional Purchase



ML80Bi

Light Body	×1	Holder AD-E2	×1
Battery ML-BA	×1	USB-C Charging Cord	×1
Zoom Lens Reflector ML-Z	×1	Storage Bag	×1
Protection Cover	×1	Instruction Manual	×1

ML150Bi

Light Body	×1	Storage Bag	×1
Protective Cover	×1	Instruction Manual	×1
Power Cord	×1	Zoom Lens Reflector ML-Z	×1
Holder AD-E2	×1	V-Mount Battery Adapter	
Adapter	×1	Plate ML-VMA	×1

ML Series LED Light

ML80Bi/ML150Bi

Optional Purchase



ML-CS30
Collapsible Lantern Softbox



ML-SF50
Octagon Softbox



AD-S60S
60cm Softbox



ML-SF3030
Square Softbox



ML-Z
Zoom Lens Reflector



ML-L15
Lens Reflector



ML-L36
Lens Reflector



RF-ML45
45° Reflector



*Accessories for Use with the Lens Reflectors



ML-D
Magnetic Diffusion Kit



ML-CFL5
Collapsible Fresnel Attachment



ML-SIA
Air Soft Tube
*Not compatible with
ML150Bi/ML150R



ML-CD15
Collapsible Diffusion Dome



ML-CS1625
Collapsible Soft Tent



ML-GB
Bowens Mount Adapter



DMX-C2
DMX Adapter Cable



BG02
Battery Grip



AK-B02
V-Mount Battery Accessory Kit



AK-B01
NPF Battery Accessory Kit



PH01
Power Bank Holder



ML-BA
Battery



ML-NPA
NP-F Battery Adapter Plate



ML-VMA
V-Mount Battery Adapter Plate

ML Series Accessories

Projection Attachment

ML-SP



ML-SP-19°
Godox-mount LED Projection 19°



ML-SP-36°
Godox-mount LED Projection 36°



ML-SP-50°
Godox-mount LED Projection 50°

Accessories for ML-SP



SP-19°
Projection Lens 19°



SP-36°
Projection Lens 36°



SP-50°
Projection Lens 50°



SP-DUST
Projection Diffuser



SP-CTF
Color Frame



SP-ID
Iris Diaphragm



SP-CF
Gobo Holder




Set MLP-11T
CCT Adjustment



Set MLP-11C
Color Effects


Gobo Set for ML-SP




Gobo Set
SA-09-001




Gobo Set
SA-09-002



Gobo Set
SA-09-003



Gobo Set
SA-09-004

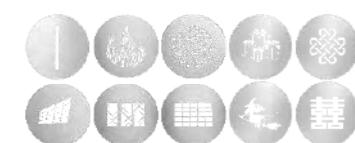

Gobo Set
MLP-GS

SL Series LED Light

SL60IID/SL60IIBi



The newly SL60IID and SL60IIBi are updated with stronger output, empowering your ideas. Controlling gets easier by connecting to the APP via Bluetooth. Changing between shooting spots becomes more convenient with its smaller size. Building a diverse ambiance comes more straightforward thanks to the bi-color version.

Key Features

- High maximum output of 18,600 Lux (SL60IID) and 25,100 Lux (SL60IIBi) at 1 meter with standard reflectors.
- Convenient control options including on board control, remote, APP, and DMX.
- Adjustable color temperature range from 2800K to 6500K (SL60IIBi).
- Built-in FX effects with 8 options (SL60IID) and 11 options (SL60IIBi).
- Compatible with a wide range of accessories through the Bowens mount.
- High color accuracy with CRI/TLCI ratings of 96+/97+.

Tech Specs

Model	SL60IID
Power Supply	100V-240V-50/60Hz 0.7A
Power	Max.70W
CCT	5600±200K
Channel	32
Group	16 (A,B,C,D,E,F,0-9)
ID	1-99/OF
CRI	≥96
TLCI	≥97
FX Type	8
Control Method	2.4GHz Wireless/Bluetooth/Light Body Control
2.4GHz Transmission Distance	≈30m
Bluetooth Transmission Distance	≈30m
Brightness Range	0%-100%
Working Environment Temperature	-10°C-40°C
Dimension (unfolded without reflector)	140*236*215mm
Net Weight [≈]	1.43kg

Model	SL60IIBi
Power Supply	100V-240V-50/60Hz 0.75A
Power	Max.75W
CCT	2800K-6500K
Channel	32
Group	16 (A,B,C,D,E,F,0-9)
ID	1-99/OF
CRI	≥96
TLCI	≥97
FX Type	11
Control Method	2.4GHz Wireless/Bluetooth/Light Body Control
2.4GHz Transmission Distance	≈30m
Bluetooth Transmission Distance	≈30m
Brightness Range	0%-100%
Working Environment Temperature	-10°C-40°C
Dimension (unfolded without reflector)	140*236*215mm
Net Weight [≈]	1.5kg

SL Series LED Light

SL100D/SL100Bi



SL100Bi

SL100D

For those pursuing the best power out of limited budget, Godox has SL100D and SL100Bi for you. Compact unit with high brightness, SL100 twins work well for small space lighting. Daylight SL100D as basic solution while the Bi-color SL100Bi for more creativity. Bowens mount makes it easier to choose accessories. Want to gain popularity as a Youtuber, live streamer, content creator or commercial producer, Lighting with SL100 will be a good start.

Key Features

- Dependable 5600K SL100D and variable (2800~6500K) SL100Bi feature a high CRI/TLCI rating of 96/97 that translates to advanced accuracy in color rendering.
- SL100D offers Lightning 1/2/3, Flash, Conference, Paparazzi, Television, and Broken Bulb, and based on that SL100Bi has 3 additional light effects: Candle, Fire, Firework.
- With its compact design, you can freely use it in home or small studio settings.
- Bowens front accessory mount allows use of Godox modifiers and those of the many manufacturers that use this popular mount.
- Dual dials and clearly marked buttons offer intuitive user interface
- The SL100D/SL100Bi functions can be adjusted on the fixture, with a smartphone using the Godox Light App, or with an optional wireless remote.



2800K-6500K
(SL100Bi)



0-100% Brightness
Adjustment



Godox Light App
Control



SL100Bi: 11
SL100D: 8

Tech Specs

LED Light	SL100D	SL100Bi
Power Supply	AC100V~240V(50/60Hz)	
Output Power	100w	
Channel	32	2800K~6500K
Group	16(0~9/A B C D E F)	
ID	OFF/I-99	
Color Temperature	5600K	
Light Adjustment Range	0%-100%	
100% Illuminance(LUX) (with standard reflector, testing distance, 1m)	≈32100	
CRI	≥96	11
TLCI	≥97	
Temperature of Working Environment	-10°~40°	
Light Effect Mode	8	
Control Method	Smartphone APP/2.4G Wireless	
Bluetooth Transmission Distance	≈30m	
2.4G Wireless Transmission Distance	≈30m	
Beam Angle	120°	
Dimension	243*205*127mm	

SL Series LED Light

SL100D/SL100Bi

SL100D-K2

SL100D	×2
304 Light Stand	×2
SB-BW-6090 Softbox	×2
RC-A6 Remote Control	×1
CB-04 Carrying Bag	×1



SL100Bi-K2

SL100Bi	×2
304 Light Stand	×2
SB-BW-6090 Softbox	×2
RC-A6 Remote Control	×1
CB-04 Carrying Bag	×1



SL Series LED Video Light

SL150III/SL200III/SL300III
SL150IIIBi/SL200IIIBi/SL300IIIBi



While Godox always keeps pursuing progress, the SL series has evolved to provide a more convenient and efficient experience. Inheriting the excellent quality and performance of the predecessor, now the SLIII (SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi) comes with the added Godox Light App control, offering you more flexibility on set. It's an ideal solution for live streaming, broadcasting, and other video applications.

Tech Specs

Model	SL150III	SL200III	SL300III	SL150IIIBi	SL200IIIBi	SL300IIIBi
Power Supply	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz
Output Power	Max. 160W	Max. 215W	Max. 330W	Max. 160W	Max. 215W	Max. 330W
CCT	5600K±200K	5600K±200K	5600K±200K	2800K-6500K	2800K-6500K	2800K-6500K
TLCI	≥97	≥97	≥97	≥97	≥97	≥97
CRI	≥96	≥96	≥96	≥96	≥96	≥96
Brightness Range	0%-100%	0%-100%	0%-100%	0%-100%	0%-100%	0%-100%
Channel	32(1-32)	32(1-32)	32(1-32)	32(1-32)	32(1-32)	32(1-32)
Group	16(A, B, C, D, E, 0-9)					
ID	99(01-99)	99(01-99)	99(01-99)	99(01-99)	99(01-99)	99(01-99)
Control Method	2.4GHz Control/Bluetooth APP Control/Light Body Control					
2.4GHz Control Distance	≤50m	≤50m	≤50m	≤50m	≤50m	≤50m
Bluetooth Control Distance	≤30m	≤30m	≤30m	≤30m	≤30m	≤30m
Working Environment Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension (excluding reflector)	34*20*16cm	36.7*20*16cm	36.2*19.4*31cm	19.9*28.5*28.8cm	19.9*31.1*29.5cm	19.9*35.6*31.6cm
Net Weight	≈2.8kg	≈3kg	≈3.6kg	≈3.1kg	≈3.25kg	≈3.59kg

Key Features

- Stepless adjustment from 0% to 100%.
- Optional Daylight version or Bi-color version.
- Silent mode especially suitable for sound-sensitive applications.
- High CRI/TLCI rating ≈96/97
- The rotatable U-shaped yoke offers excellent flexibility and can be used with most light stands.
- Multiple control methods including onboard control, wireless remote control and Godox Light App control.
- Built-in FX effects.
- Bowens mount for wide compatibility.

SL Series LED Video Light

SL150R/300R



SL300R



CRI
96+

26000lux(SL150R)
43300lux(SL300R)
@1m 5600K with standard reflector



Godox Light APP
Control



DMX512 Control



14 FX Effects



2500K-10000K



Multiple Color
Modes



Gel Mode

TLCl
96+

TLCl 96+



Remote Control



Mute Mode

Tech Specs

Model	SL150R	SL300R
Power Supply	36V=4.6A	52V=5.7A
Input Power	Max. ≈165W	Max. ≈310W
CCT	2500-10000K	
Brightness Range	0%-100%	
FX Type	14	
CRI	Average≥95	
TLCl	Average≥96	
CH	32(1-32)	
GR	16(A-F 0-9)	
ID	99(1-99)	
Mode	CCT CCT mode/HSI mode/ RGBW mode GEL mode/FX mode	
Controlling Mode	2.4G wireless control/DMX 512 control Bluetooth control/light body control	
2.4G Controlling Distance	Max.50m	
Bluetooth Controlling Distance	Max.30m	
U-type Bracket Adjustment Angle	360°	
Working Environment Temperature	-10°C ~+40°C	
Dimension	288*199*283mm	315*199*342mm
Net Weight	2.35kg	2.77kg

RS SERIES



Full/Bi Color LED Light

RS60R/RS60Bi



RS60Bi

RS60R



Introducing the RS60Bi/R, a revolutionary addition to the Godox lineup. The 31g compact body integrates optimized 18mm LED beads, delivering 60W of power and full color with 91% Rec.2020 color gamut coverage. The all-new Godox magnetic mount seamlessly integrates with the Godox Optical Ecosystem, enabling versatile lighting effects. When paired with the SZL2 aspheric zoom lens, the RS60Bi/R is compatible with the optical accessories of the S60Bi. The RS60Bi/R comes with a detachable battery and an all-in-one GaN power adapter included in the kit.



Key Features

- All-new Godox magnetic mount.
- Lightweight Body with 303g(RS60Bi)/311g(RS60R).
- 60W Power Supply.
- Multiple Modes: CCT, HSI, RGBW, and FX.
- CCT range from 2800K to 6500K(RS60Bi)/1800K to 10000K (RS60R).
- Paired with the SZL2 zoom lens, compatible with S60Bi optical accessories.
- Seamless Integration with Godox Optical Ecosystem.
- Removable fast-charging battery and GaN power adapter.
- Power Options: AC, DC 48V, USB-C, NPF battery, V-mount batteries.
- Complete Godox Lighting Ecosystem.
- Powered via E27 socket, blending into scenes as downlights, spotlights, or stage lights.
- Wired DMX connection/RDM protocol/Bluetooth app control.

Tech Specs

Model	RS60Bi	RS60R
Lithium Battery Parameters	DC14.4V USB-C Input: 5V=3A, 9V=1A, 12V=2.5A, 20V=1.5A	
Light Body USB-C Port Input	20V=3A Max 60W	
CCT	2800K-6500K	1800K-10000K
Brightness Range	0%-100%	
Dimming Curves	linear, S-curve, exponential, logarithmic	
FX Mode	11	14
CRI	Average≥97	Average≥95
TLCI	Average≥98	Average≥95
Controlling Methods	DMX controller, support RDM protocol/Bluetooth app control	
Bluetooth Controlling Distance	60m	
Working Environment Temperature	-20°C~40°C	
Dimension	≈3.03" * 3.03" * 3.58"	
Netweight	≈303g	≈311g
(without lens reflector and battery)		

Full/Bi Color LED Light

What's inside

RS60R/Bi



Light Body×1



Lens Reflector×1



Battery×1
MS60BAT01



Metal Holder Bracket×1
AD-E2



USB-C Charging Cord×1
(80cm)



Storage Bag×1

Optional Purchase

RS60R 1K (1 Light Kit)



Light Body×1



Lens Reflector×1
Power Adapter×1
MS60PA01



NPF Battery Adapter×1
MS60NPA



Power Cord×1



Metal Holder Bracket×1
AD-E2



Projection×1
SP36K



V-mount Battery
Holder×1



D-TAP Cable×1



Storage Bag×1

RS60R/Bi 2K (2 Lights Kit)



Light Body×2



Lens Reflector×2
Power Adapter×2
MS60PA01



Battery×2
MS60BAT01



Magnetic Kit×1
MK



Zoom Lens×1
SZL2



Collapsible Diffusion
Dome×1
Metal Holder
Bracket×2
AD-E2



Power Cord×2
USB-C Charging
Cord×2(80cm)



Parabolic Softbox×1
Sp1



Storage Bag×1

Full Color LED Video Light

RS100R/RS100Bi



RS100Bi



RS100R




52 Mins

28,600 Lux

2800K-6500K(RS100Bi)
1800K-10000K(RS100R)

52mins Runtime
at 100% Brightness

28,600lux @1m
(5600K)



One-Piece
Outdoor-Ready Light

0.1%

Brightness Adjustment



Godox S-Mount



DMX Control



NFC Tap-to-Pair

Key Features

- Godox S-Mount compatibility.
- 28,600 lux in a compact design.
- 2800K-6500K(RS100Bi)/1800K-10000K(RS100R) CCT with HSI, RGBW, X-Y, Gel, and FX modes.
- Built-in battery delivers 52mins of full-output.
- 1/4" threaded hole offers flexible mounting options across stands, rigs, and cages.
- NFC Addition and App/DMX-C2 Control.

Tech Specs

Model	RS100Bi	RS100R
USB-C Port	Input: 28V=5A	
GM Adjust	/	-100%-100.0%
Brightness Range	0.0%-100.0%	
Dimming Curves	linear, S-curve, exponential, logarithmic	
FX Modes	11	14
CRI	≈98	≈90
TLCI	≈98	≈92
Controlling Methods	Wired DMX/RDM, Bluetooth, Light Body Control	
Bluetooth Controlling Distance	30m	
Working Environment Temperature	-10°C~40°C	
Dimension (without lens reflector)	9.21" * 3.07" * 3.07" / 234x78x78mm	
Net Weight (without lens reflector)	886g/1.95lb	921g/2.03lb

Optional Purchase



RS100Bi/100R

Light Body	×1	Lens Reflector	×1
Holder AD-E2	×1	Storage Bag	×1
USB-C Charging Cable	×1		



RS100Bi/100R 1K

Light Body	×1	Lens Reflector	×1
Holder AD-E2	×1	Storage Bag	×1
USB-C Charging Cable	×1	Projection SP36K	×1

RS Series Accessories

Optional Accessories



Parallel Beam Reflector
BeamLight S20



Lantern
SII



Reflector
Sr15



Projection
SP36K



Projection
SP50K



NPF Battery Adapter
MS60NPA

*Compatible with RS60Bi/R



Snoot
AK-SN



DMX Adapter Cable
DMX-C2



Gobo Set
SA-09-001



Gobo Set
SA-09-002



Gobo Set
SA-09-003



Gobo Set
SA-09-004

Compatible with accessories of RS Series focusing light when using Zoom Lens SZL2



Zoom Lens SZL2


+




Projection Attachment
(included a SA-01 85mm lens)
SA-P



Projection Attachment
SA-P1



85mm Lens
SA-01



60mm Lens
Wide-angle
SA-02



150mm Telephoto
Lens SA-03



Barndoors
SA-08



Softbox
SA-30



Framing Shutter
SA-07



Iris Diaphragm
SA-06



GOBO Holder
SA-10



GOBO Set
SA-09



Scrim Set
SA-05



Color Filters of Color
Effects Set
SA-11C



Color Filters of Color
Temperature Adjustment Set
SA-11T



FOCUSING LIGHTS

Focusing Lights

S60Bi



S60Bi

Key Features

- Beam angle from 6 to 55 degrees, light where you want
- Variable Color Temperature
- High color rendering CRI/TLCI rating of 96+/97+
- Lighting FX
- Silent mode
- Control by Godox Light app, remote RC-A6 or DMX

More Features of S60 Series



S60Bi-K3 Three-light Kit

1.Light Head	x3	13.SA-11C Color Filters of Color Temperature	x1
2.Wrench	x1	Color Effects Set	
3.Power Cord	x3	14.SA-11T Color Filters	x1
4.Connect Cable	x3	of Color Temperature	
5.Controller Box	x3	Adjustment Set	
6.SA-30 Softbox	x2	15.SA-P Projection Attachment	x1
7.SA-05 Scrim Set	x1	(included a SA-01 85mm lens)	
8.SA-06 Iris Diaphragm	x1	16.CB52 Carrying Bag	x1
9.SA-07 Framing Shutter	x1	for Light Stand	
10.SA-08 Barndoors Set	x3	17.Remote Control RC-A6	x1
11.SA-09 GOBO Set	x1	18.213B Light Stand	x3
12.SA-10 GOBO Holder	x1	19.CB51 Carrying Case for Kit	x1

Tech Specs

Model	S60Bi
Power Supply	AC Power Supply/100~240V 50/60HZ 0.9A MAX V-port battery Standard voltage: 14.8V (optional)
Output Power	77W (Max)
Color Temperature	2800~6500K
CRI	≈96
TLCI	≈97
Brightness Range	0~100%
Channel(CH)	32 (1 to 32)
Group (GR)	16 (A to F/0 to 9)
Beam Angle	6°-55°
Working Environment	-10~40°C
Temperature	
Control Method	Smartphone APP/2.4G wireless/remote/control/DMX control
2.4G Wireless Transmission	50m
Distance(≈)	
Dimension(≈)	Light body: 264*107*100mm Controller: 233*112*61mm
New weight(≈)	Light body: 1.36kg Controller: 1kg



Focusing Lights

S60Bi



Abundant Accessories



SA-08 Barndoors Set



SA-30/SA-20 Softbox

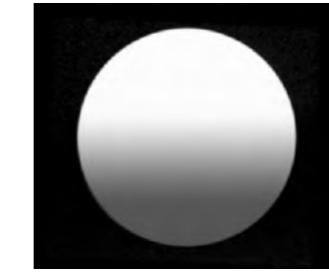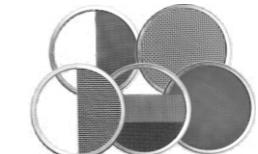

SA-05 Scrim Set



SA-07 Scrim Set



SA-06 Iris Diaphragm



SA-09 GOBO set



SA-11C/SA-11T Colors gels

Projection attachment: project a highly focused and controlled beam of light. This attachment is what enables you to get the utmost out of creativity of Focusing light series for it is specially designed for fitting a vast range of light shaping accessories.



SA-P Projection Attachment
(included a SA-01 85mm Lens)
SA-01 85mm Lens
SA-02 60mm Wide-angle Lens
SA-03 150mm Telephoto Lens



PANEL LIGHTS




Full Color LED Light Panel

UP150R




Full Color LED Light Panel

UP150R

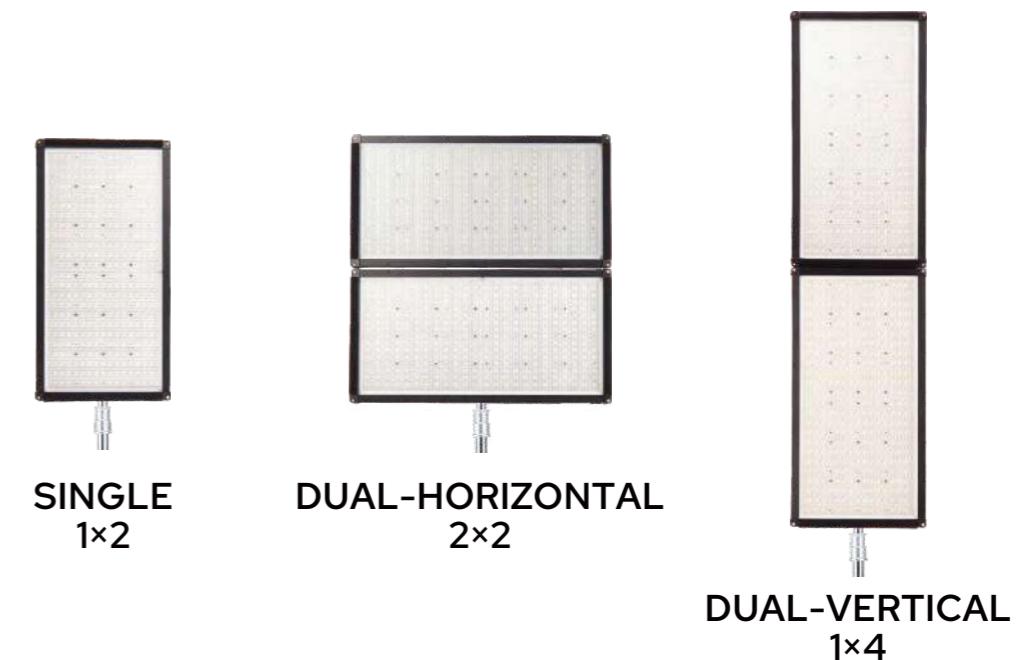

Key Features

- Delivers powerful, soft output—20,400 lux @1m.
- Combines a slim-profile design with a Quick-Release Mounting System.
- Flexible mounting options support rapid setup and teardown.
- 1800K~10,000K CCT with FX, HSI, RGBW, and GEL modes.
- High color rendering CRI/TLCI rating of ≈97/98.
- Full-metal housing enables efficient cooling and stable output.
- App control with NFC pairing and optional DMX-TRSI support.
- Direct V-mount power.
- Supports dual-Light expansion with the controller (UP-C300).

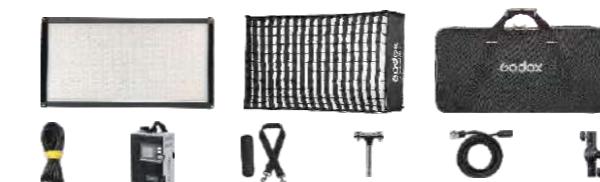

UP150R

Light Body (UP150R)	x1	AC Power Cord	x1
Controlling Cable	x1	Controller (UP-C150)	x1
Rectangular Softbox (UP150RRS12)	x1	Shoulder Strap (Ss01)	x1
Adapter Holder (AH-02)	x1	Storage Bag (Sc29)	x1
5/8" Baby Pin (UP150RBP01)	x1		

Optional Purchase



Tech Specs

Model	UP-C150	UP150R
AC INPUT Port	100V~240V~50/60Hz,180W	/
CCT Range	1800K~10000K	/
GM Adjust	-100%~100%	/
Brightness Range	0.0%~100.0%	/
Dimming Curves	linear, S-curve, exponential, logarithmic	/
Controlling Methods	Wired DMX/RDM, Bluetooth app, controller control	/
Bluetooth Controlling	30m	/
Distance		
USB-A Port	Firmware Upgrade/5V-1A Power Supply	/
CRI	/	≈97
TLCI	/	≈98
Working Environment	-20°C ~ 45°C	-20°C ~ 45°C
Temperature		
Dimension	≈4.09" * 2.95" * 6.3"	13.94" * 0.95" * 26.77"
Net Weight	≈0.85kg/1.87lb	≈3.2kg/7.05 lb



UP150R Kit 2

Light Body(UP150R)	x1	AC Power Cord	x1
Adapter Holder(AH-02)	x1	Controlling Cable	x1
Rectangular Softbox 2*2(UP150RRS22)	x1	Shoulder Strap(SS01)	x1
Straight Connector 2*2(UP150RSC01)	x1	Storage Bag(SC30)	x1
UP-C300 Controller	x1		

Bi-Color Light Panel

P260C Pro



Bi-Color Light Panel

P260C Pro



Key Features

- High Power, High Brightness
- Enhanced Diffuser for Softer Light
- Ultra-Thin Design
- Lithium battery/USB-C/DC power supply
- 2800K-6500K
- CRI/TLCI 98+
- Smart Lighting Control

Tech Specs

Model	P260C Pro
CCT	2800K-6500K
Input Power	45W
CRI	Average≥98
TLCI	Average≥98
Controlling Methods	Bluetooth Control/Light Body Control
Working Environment Temperature	-10°C~+35°C
Dimension (including handle)	≈328*323*42mm
Net Weight (including handle)	≈1.2kg



Light Body Adapter x1 Handle Adapter x1
Adapter Charging Cord x1



LED Video Light

LDP8D/8Bi/18D/18Bi



LDP8D/8Bi/18D/18Bi

Key Features

- The unique mounted LED chips make the emitted light even softer.
- Enjoy the ultra-light design for easy shooting on location.
- High color accuracy with TLCI ratings of 95+.
- Adjustable color temperature ranges from 2800K to 6500K (LDP8Bi/18Bi).
- Built-in FX effects with 22 options (LDP8D/18D) and 31 options (LDP8Bi/18Bi).
- Stable output with 0% to 100% brightness range.
- Support DC power supply/NP-F battery power supply.



Tech Specs

Model	LDP8D	LDP18D	LDP8Bi	LDP18Bi
DC Inputs	5V=2A	12V=2A	5V=2A	12V=2A
Input Power	≈10W	≈21W	≈10W	≈22W
Power Supply	DC power supply/NP-F battery power supply (NP-F battery is sold separately)			
Brightness	0%-100%	0%-100%	0%-100%	0%-100%
Ra	average≥92	average≥95	average≥96	average≥96
TLCI	average≥97	average≥95	average≥98	average≥97
Working Environment Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C	-10°C~40°C
CCT	5600K	5600K	2800-6500K	2800-6500K
Dimension	147*105*33mm	210*149*31mm	147*105*33mm	210*149*31mm
Net Weight [≈]	194g	363g	194g	363g

RGBWW Panel Light

LDX50R/50Bi/100R/100Bi



LDX50R/50Bi/100R/100Bi

Key Features

- Detachable diffuser for customizable lighting options.
- The metal structure on the back ensures heat dissipation without noisy fans and enhances durability for long-term usage.
- Bi-color version with five preconfigured color temperatures (2800K/3200K/4300K/5600K/6500K) for easy application.
- Adjustable color temperature range: 2800K to 6500K (LDX50Bi/100Bi) and 2500K to 10000K (LDX50R/100R).
- Built-in FX effects with 11 types (LDX50Bi/100Bi) and 14 types (LDX50R/100R).
- Convenient control options: panel, remote control, and APP.
- Multiple power supply options: NP-F battery, V-mount battery, and DC power.

Optional Purchase

LDX50Bi/LDX50R



LDX100Bi/LDX100R



Tech Specs

Model	LDX50R	LDX100R	LDX50Bi	LDX100Bi
Power Supply	20V=3.5A	20V=6A	20V=3.5A	20V=6A
Total Power	Max.63W	Max.118W	Max.65W	Max.120W
CCT	2500K-10000K	2800K-6500K	0%-100%	0%-100%
Brightness Range	0%-100%	0%-100%	0%-100%	0%-100%
FX Type	14	11	11	11
CRI	Average≥96	Average≥96	Average≥96	Average≥96
TLCI	Average≥96	Average≥96	Average≥96	Average≥96
Channel	32(1-32)	32(1-32)	32(1-32)	32(1-32)
Group	16(A-F, 0-9)	16(A-F, 0-9)	16(A-F, 0-9)	16(A-F, 0-9)
ID	99(1-99)	99(1-99)	99(1-99)	99(1-99)
Controlling Method	2.4G remote control/Bluetooth APP Control/Light body control			
2.4G Controlling Distance	Max.50m	Max.50m	Max.50m	Max.50m
Bluetooth Control Distance	Max.30m	Max.30m	Max.30m	Max.30m
U-type Bracket Adjustable Angle	360°	360°	360°	360°
Working Environment Temperature	-20°C~+40°C (in DC power supply)			
Dimension	357*305*75mm	417*468*63mm	357*305*75mm	417*468*63mm
Net Weight [≈]	1.86kg	3.24kg	1.85kg	3.26kg

Panel Light



LED1000Bi II

LED1000D II/LED1000Bi II video lights are excellent for product shooting, photojournalistic and video recording, etc. It provides a wide spectrum, beautifully soft and even illumination for photography.

Key Features

- Premium LED bulbs and wide screen offer high brightness
- Three models create various light effects
- Three control options to wirelessly adjust brightness or color temperature
- Lithium battery or DC charged



LED1000D II

Tech Specs

LED Video Light	LED1000DII (daylight version) LED1000BiII (Bi-color version)
Lithium Battery	14.8V Lithium battery (BP-L model)(sold separately)
DC Power Supply	13~16.8V
Channel	16
Group	6 (A, B, C, D, E, F)
Power	Max. 70W
Color Temperature	5600K±300K 3300K~5600K±300K
100% Brightness(Lux)≈	5400 @1m 4800 @1m/4200K 2200 @1m/3300K 2600 @1m/5600K
CRI≈	96
TLCI≈	98
Dimming Range	0%~100%
LED Beads Quantity	1024 5600K: 512/3300K: 512
Operation Temperature	-10~40°C
Dimension	430*460*100mm
Net Weight	2.51Kg
 Remote Control	 RC-A5II
Power Supply	3.0V(AAA*2)(not included)
Wireless Frequency	433MHz
Distance (Open Area)	20m
Channel	16
Group	6 (A, B, C, D, E, F)
Standby Time	More than one year
Operation Temperature	-10~40°C
Dimension	120*38*15mm
Net Weight	30g

LED1000Bi II/LED1000D II

LED Panel Light




LEDP120C

LEDP260C

Key Features

- High-quality LED bulbs
- Using lithium battery with great portability
- Soft and even illumination
- Included with a L-type bracket
- Fits almost any cameras and camcorders

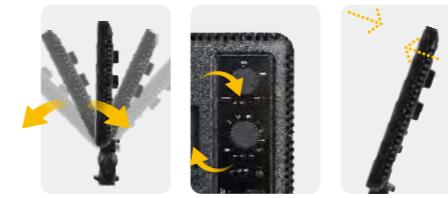

- With the wide spectrum, soft light and accurate color temperature
- Wireless grouping system (6 groups & 16 channels)
- Adjustable light brightness and color temperature
- Lithium battery or DC charged
- Large-sized LCD panel and settings auto saved
- Include a detachable handle and AC adapter



Tech Specs

LED Light	LEDP120C	LEDP260C
Power Supply	7.4V Lithium Battery (NP-F970 model)	7.4V Lithium Battery (NP-F970 model lithium battery)(optional)
		lithium battery)(optional) DC Power Supply: 13-16.8V
Power	Max.12W	Max.30W
Channel	16	
Group	6(A, B, C,D, E, F)	
Color Temperature	3300K~5600K±300K	
Brightness(LUX)	580(0.5m/4500K) 630(0.5m/3300K) 680(0.5m/5600K)	2050 (0.5m/4500K) 2050 (0.5m/3300K) 2200 (0.5m/5600K)
Dimming Range	10%~100%	
CRI	≥95	≥95
TLCI	≥95	≥94
Operating Temperature	-10~40°C	
Package Weight	220g	917g
Box Dimensions	175*130*17mm	360*240*27mm
(LxWxH)	not with the L-type Bracket	

Remote Control

RC-A5
Power Supply
3.0V(AAA*2) (not include)
Wireless Frequency
433MHz
Distance (emptiness)
20m
Channel
16
Group
6 groups(A/B/C/D/E/F)
Standby Time
Over one year
Operation Temperature
-10~50°C
Dimension
120*38*15mm
Net weight
30g



LEDP120C/LEDP260C

Flexible Handheld LED Light

FH50R/FH50Bi



FH50R



FH50Bi

Key Features

- Swiftly shape illuminating areas with a secure metal frame after a single bend.
- Ultra-portable handheld design supports your on-the-go shootings.
- Color temperature from 2500K to 10000K(FH50R) and 2800K to 6500K(FH50Bi).
- HSI Mode in FH50R.
- 14 FX Effects in FH50R and 11 in FH50Bi.
- Control methods: APP/remote control/on board control.
- Power supply: AC adapter/V-mount battery/NPF battery.



Flexible Handheld LED Light

FH50R/FH50Bi



FH50Bi



Light Body
Carry Bag
Adapter



Stand Adapter
AC Power Cord



Tech Specs

Model	FH50R	FH50Bi
Adapter Output Voltage	16.8V	
Input Power	Max.≈62W	
NPF Battery Specifications	7.2V-8.4V≈*2	
(available separately)		
V-mount Battery Specifications	14.8V≈	
(available separately)		
Color Temperature	2500K~10000K	2800K~6500K
Brightness Range	0%-100%	
FX Type	14	11
CRI	Average≥96	Average≥97
TLCI	Average≥96	Average≥97
Channel	32(1~32)	
Group	16(A-F, 0-9)	
ID	99; 1-99	
Mode	CCT/HSI/FX	CCT/FX
Controlling Method	2.4G Wireless Control/Bluetooth APP/ Light Body Control	
2.4G Wireless Control Distance	Max.50m	
Bluetooth Transmission Distance	Max.30m	
Working Environment Temperature	-10°C~40°C	
Dimension	317*311*34mm	
Net Weight≈	633g	570g

FH50R



Light Body
Carry Bag
Adapter



Stand Adapter
AC Power Cord



Optional Purchase



Rectangular
Softbox FS50



Pancake
Lantern FP50



Handheld
Powering
Accessory
Kit ML-AK




AK-B01
NP-F Battery
Accessory Kit



AK-B02
V-Mount
Battery
Accessory Kit

Full Color Flexible Light Mat

FL100R/FL200R/FL200SR

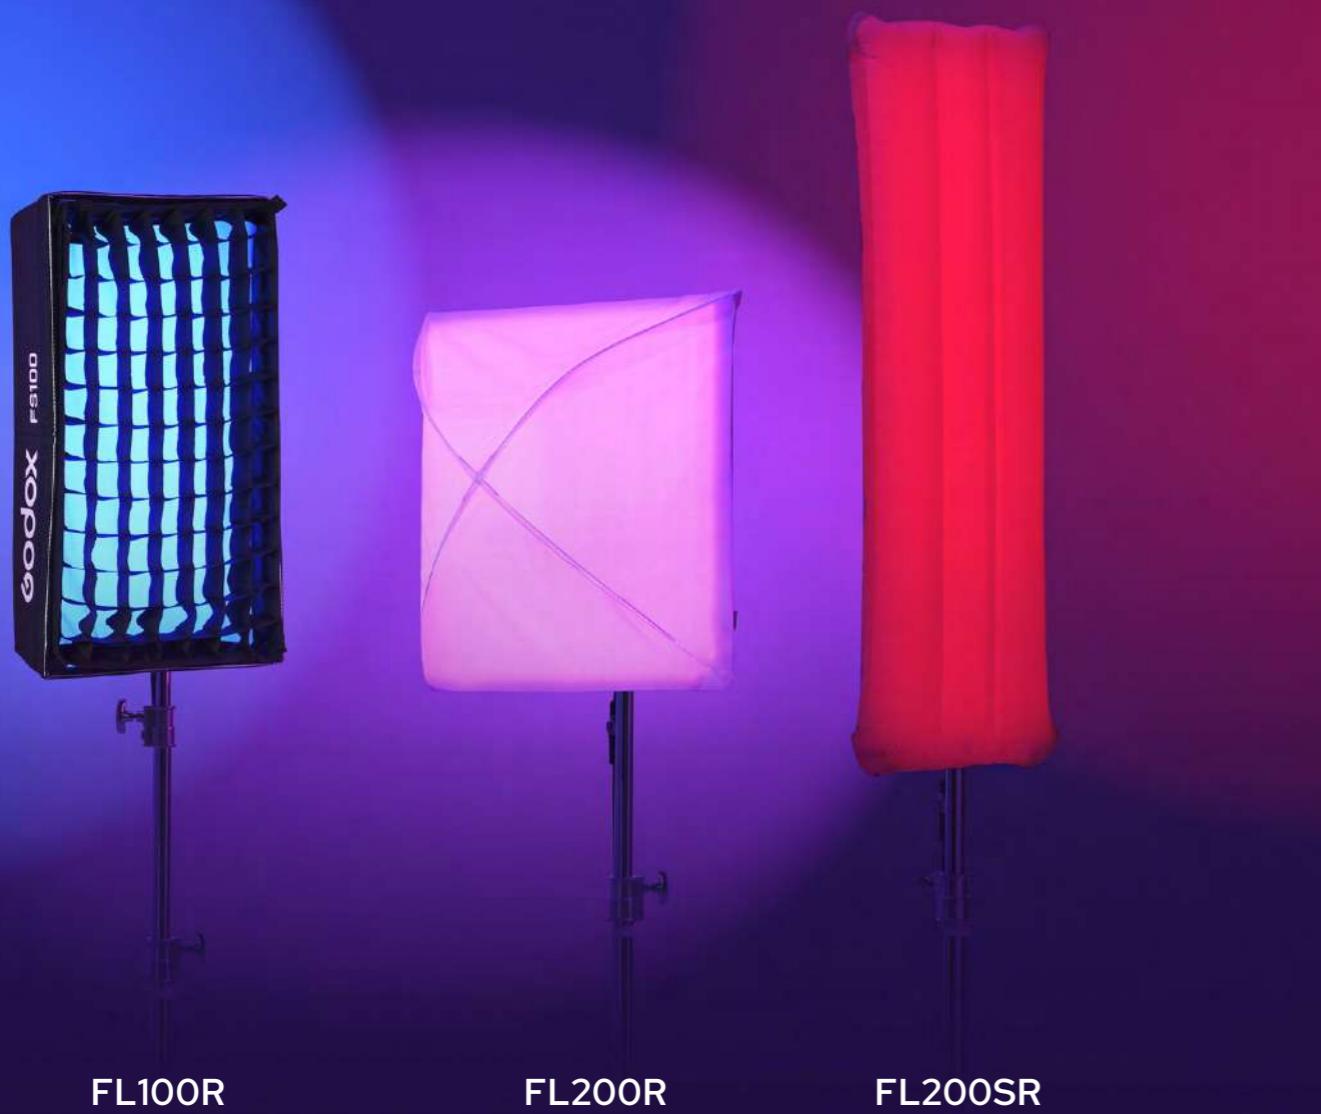

FL100R

FL200R

FL200SR

Key Features

- Ultra-thin and foldable light body
- Compact controller in one-hand Size
- Versatile full-color lighting
- Wide CCT range from 1,800K to 10,000K
- High color accuracy built to KNOWLED professional standard
- Powered by DC power supply and Single V-mount battery
- NFC pairing by Godox Light APP
- DMX control support
- Various sizes and accessories



Full Color Flexible Light Mat


FL100R/FL200R/FL200SR



Optional Purchase

Air Softbox Kit

Air Softbox Body ×1
Grid ×1
Skirt ×1
Air Pump ×1
Repair Patch ×2



FA100 for FL100R



FA200 for FL200R



FA200S for FL 200SR

Pancake Lantern

FP200 for FL200R



DMX Adapter Cable

DMX-TRS1



Skirt for K1 Softbox

SS-FS100 for FS100
SS-FS200 for FS200
SS-FS200S for FS200S



AirTube Kit

Air Tube ×1
Skirt ×1
Air Pump ×1
Repair Patch ×2
Fabric Handle ×2
Connecting Holder ×1
Velcro Hook Fastener ×1




AT200 for FL200SR



Tech Specs

Model	FL100R	FL200R	FL200SR
AC INPUT Port	100~240V~50/60Hz 250W		
CCT Range	1800K~10000K		
GM Adjust	-100%~100%		
Brightness Range	0.0%~100.0%		
Dimming Curves	Linear, S-Curve, Exponential, Logarithmic		
CRI	≈95		
TLCI	≈95		
Controlling Methods	Wired DMX and RDM/Bluetooth app/Controller Control		
Bluetooth Controlling Distance	30m		
USB-A Port	Firmware Upgrade/5V=1A Power Supply		
Working Environment	-20°C~45°C		
Temperature			
Dimension of Controller	≈4.09"×2.95"×6.3"		
Net Weight of Controller	≈0.85kg		
Dimension of Bare Light	13.54"×25.04"	25.08"×25.08"	13.54"×48.03"
Net Weight of Bare Light	0.6kg	1kg	1.05kg

Foldable LED Mat

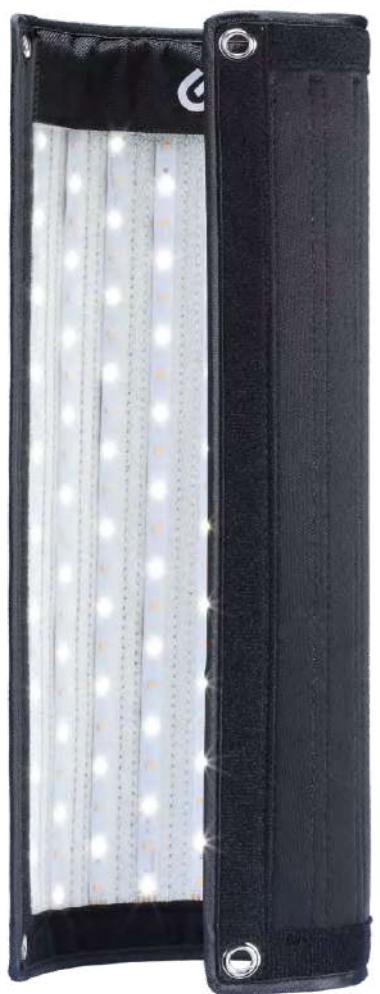

FL150R




FL60/FL100/FL150S/FL150R



FL150S FL100 FL60



Use in combination

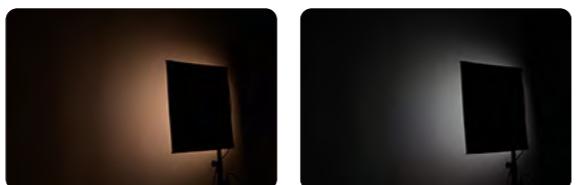

Color Temperature 3300K-5600K

Brightness (10%~100%)

Foldable LED Mat

Work with the accessories to achieve a softer lighting effect.



Easy to shape what you want

Providing a light source for all kinds of videorecording or photography in a narrow space !



Tech Specs

Flexible LED Light	FL150S/FL150R	FL100S	FL100R
Power Supply	AC100V-240V(50/60Hz)		
DC Power Supply	3.5A(DC16.8V,10A)	3A(DC16.8V,7A)	2.5A(DC16.8V,4.2A)
Lithium Battery	V-port battery		
Power	150W	100W	60W
Color Temperature	3300±200K/5600±200K		
100% Light			
Brightness (LUX)	<4300 Lux	<3300 Lux	<1800 Lux
(darkroom, 1m)			
TLCI	≥98		
CRI	>96		
Light Brightness Range	10%-100%		
Operation Temperature	-10°C~45°C		
Channel	16		
Group	6 group (A,B,C, D,E,F)		
Wireless Remote	<30m		
Control Distance			
Bluetooth Distance	<50m		
Dimension	60*60cm/30*120cm	40*60cm	30*45cm
Net Weight	3.9kg/4.37kg	3.47kg	2.87kg
(only the main light body)			



A dense, colorful forest scene at night. The scene is filled with various types of trees and foliage, including pine needles, broad leaves, and dried branches. Interspersed throughout the scene are numerous glowing lights, primarily in shades of red, orange, and yellow, which appear to be from hybrid flash LED lights. These lights create a warm, glowing atmosphere and highlight specific branches and leaves. The overall effect is a magical, illuminated forest.

HYBRID FLASH LED LIGHTS

Photographer: Aries Tao

Hybrid Flashes and LED Lights

FV150/FV200



FV150

FV200

Flash Mode



The Brightness of Flash is Four Times of LED's



Over 10 Continuous Flashes Per Second in 1/2 Power



1/8000s HSS
Godox Wireless X System



Godox Wireless X System

LED Mode



Soft Light Effects



0-100% Precise Brightness Adjustment



8 FX Special Effects

Key Features

As a Flash

- The flash's light brightness is four times of LED light's, which increase the freezing ability of instantaneous action.
- Supports 1/8000s high-speed sync function. Over 10 continuous flashes per second and 8 continuous flashes per second in high-speed sync mode in 1/2 power output.
- Built-in Godox 2.4G wireless receiver (X system), compatible with Canon, Nikon, Sony, Fuji, Panasonic, Olympus and Pentax cameras.
- 1/16-1/1 or 6.0-10.0 power output displayed in the form of fractions or decimal.
- Adjust modeling lamp's light brightness from 5% to 100%.

As a LED Light

- With soft light effects and high light brightness which can be precisely adjusted from 0% to 100%.
- With 8 FX special effects mode to simulate various of shooting scene and achieve creative shooting.

More Design Details

- Support wireless control (16 groups and 32 channels) with optional remote control.
- With U-type bracket to adjust different angles easily.
- Bowens-mount enables to install various of accessories conveniently.
- Large and clear LCD display.
- Excellent heat dissipation.

FV150/FV200

Hybrid Flashes and LED Lights

LF308



LF308Bi



LF308D

Flash Mode



The Brightness of Flash is 3 Times of LED's



1/8-1/1 or 7.0-10.0 Power Output



Godox Wireless X System

LED Mode



Soft Light Effects



0-100% Precise Brightness Adjustment



Li-ion & AC Power Supply

Tech Specs

High Speed Sync Flash LED Light	FV150	FV200
Power Supply	100~240V(50/60Hz)	
Power	150W	200W
Color Temperature	5600±200K	
100% Light Brightness(LUX, 1M)	≈12000	≈18000
CRI(≈)	96	
TLCI(≈)	96	
Light Brightness Range of LED Mode	0%-100%	
Operation Temperature	-10°~45°C	
Power Output	1/16-1/1 or 6.0-10.0	
Channel	32	
Group	16(A,B,C,D,E,F,0-9)	
Dimension	34*20*16cm	36.7*20*16cm
(not included a standard reflector)		
Net Weight	3.13Kg	3.33Kg

Key Features

As a Flash

- The light is 3 times brighter when used as flash than when used as a led light.
- 1/8-1/1 or 7.0-10.0 power output displayed in the form of fractions or decimal.
- The modeling lamp's light brightness can be adjusted from 0% to 100%.

As a LED Light

- 308 beads offers high brightness and stable light source.
- 0%-100% precise brightness adjustment.
- For the daylight version, the color temperature is fixed at 5600K. For the bicolor version, the color temperature is adjustable between 3300K and 5600K.

Tech Specs


LED Flash Light	LF308D Daylight Version	LF308Bi Bicolor Version
Lithium Battery	7.4V Lithium Battery (SONY NP-F970 model lithium battery) (sold separately)	
DC Power Supply	6.5-12V 4A	
Channel	32	
Group	6 groups(A, B, C, D, E, F)	
Power	Max. 18W	
Color Temperature	5600K±300K	3300K~5600K±300K
Brightness (LUX)	LUX≤1300 (1m)	LUX≤1200 (1m)
Light Brightness Range	10%-100%	
Power Output Control	OF, 7.0-10(1/8-1/1)	
Triggering Method	Sync cord, test button, 2.4G wireless, Bluetooth	
LED Beads	308	308
Quantity		(5600K:154/3300K:154)
Operation Temperature	-10~50°C	
Dimension	180*185*40mm (not with the Handle)	
Net Weight	400g	



Photographer: LVN Studio

RGBWW Tube Light

TL30

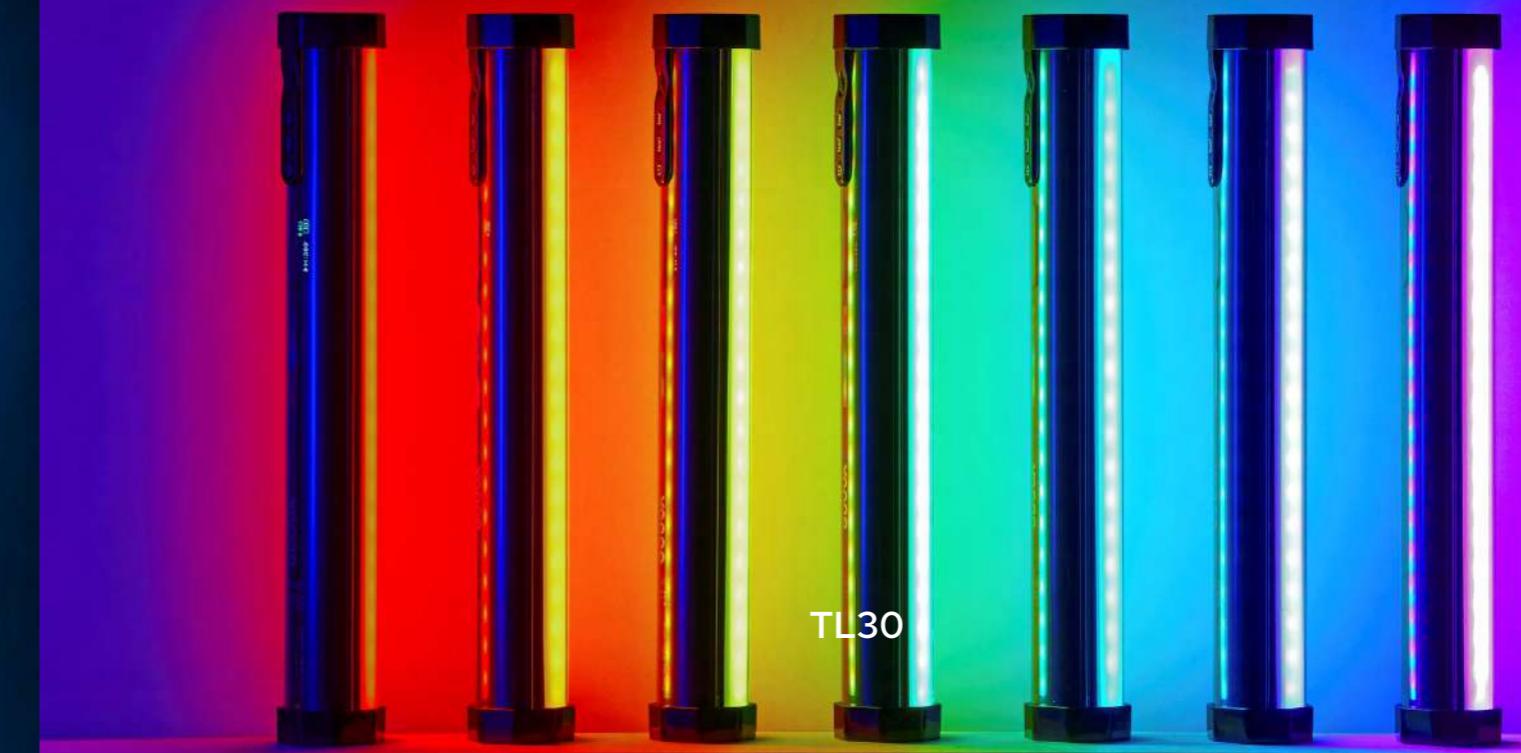


A new addition to Godox tube light family, TL30. Featuring tube shape in light weight, it is portable and easy to use. Small as it is, great potentials to expect. Tons of colors in control for dynamic content creating. Accessories like various couplers, waterproof bag, grid inspire extensive possibilities for the form, effect and even applicable environment of this light. You will enjoy the infinity that TL30 could be to enrich every shot.

Key Features

- RGBWW, CCT, HSI modes
- 36,000 Colors
- 13 Tunable effects
- Advanced Green/Magenta adjustment
- Bluetooth control with Godox Light App
- USB-C charging port
- Integrated lithium-ion battery, 3.6V/2900mAh/10.7Wh
- Embedded magnetic mounts

Abundant functions for various scenarios

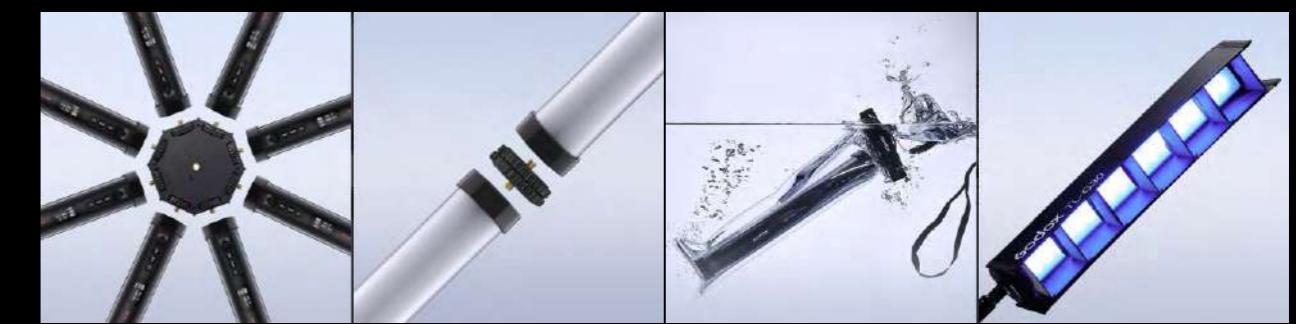

TL-M8 8-light coupler

TL-M2 2-light coupler

TL-W30 Waterproof bag

TL-G30 Grid

RGBWW Tube Light



TL60



RGBWW

Adding Additional Two LED Whites



HSI

Fully Control for up to 36000 Colors



Gel

40 Built-in R-Gel and L-Gel Filters



CCT

Wide Color Temperature From 2700K-6500K



FX

39 FX Effects

Godox Tube light TL60 it's designed to give users the freedom to inspire their creativity for endless range of shooting scenarios, like film making, video and photography in anywhere you go. With multiple color modes, CRI 96 and TLCI 98, ultra smart control system, and flexible tube design, TL 60 enables variety lighting setups to represent impressive performance on highly explore creativity, carry out high efficiency shooting and produce memorable magic moments.



Remote

Godox Light

On-board Control

DMX

Key Features

- Color: 2700-6500K, CRI/TLCI: 96/98
- RGBWW/HSI Control, 40 Built-In Filters
- Battery Has 2-Hour Runtime
- Phone, DMX, 2.4 GHz Wireless Control
- Dims 0-100%, 98-164' Wireless Range
- 32 Channels, 6 Groups
- Power Adapter, DC Cable, Carry Bag

TL60

RGBWW Tube Light



No matter you want to put it into different figures, hang on the wall, hold by hand or any other creative usage. It will satisfy with any kinds of shooting scenarios in anywhere. With Godox Light APP, you can freely control multi lights wirelessly.

Tech Specs

LED Light	TL60	TL30
Internal Lithium Battery	14.4V/2600mAh	3.6V/2900mAh/10.7Wh
Adapter	Output 20V 2.4A	5V/2A(optional)
Power	Max.18W	Max.8W
Color Temperature	2700K~6500K	2700K~6500K
Light Brightness Range	0%~100%	0%~100%
RGB Color Gamut	0~360°	0~360°
100% Brightness(LUX)≈	1500	740
CRI(≈)	96	97
TLCI(≈)	98	99
Duration(continuous output in 100% full power in 2700K for 6500K)	Approx 2 hours	Approx. 60 minutes
Control Method	Smartphone APP(for both Android and iOS system)/2.4G wireless/DMX control	Smartphone APP /
Control Distance	Bluetooth Wireless≈30m 2.4G Wireless≈50m(optional RC-R9 remote control)	Bluetooth Wireless≈30m /
Operating Temperature	-10 to 40°C	-10 to 40°C
Dimension	Φ48*750mm	Φ42*300mm
Net Weight	0.73kg	0.3kg

RGBWW Tube Light

TL30/TL60

TL30-K2 Two Light Kit for TL30

Tube Light TL30	x2
Wrist Strap	x2
Metal Plates	x6
TL-G30 Grid	x2
USB-C Power Cable	x2
TL-C2 Retaining Clip	x2
TL-M2 2-light Coupler	x1
Adhesive Hook & Loop	x6
TL-W30 Waterproof Bag	x2
CB23 Carry Case	x1



TL30-K4 Four Light Kit for TL30

Tube Light TL30	x4
Wrist Strap	x4
TL-G30 Grid	x2
Metal Plates	x12
USB-C Power Cable	x4
TL-C2 Retaining Clip	x4
TL-M2 2-light coupler	x4
TL-M8 8-light coupler	x1
TL-W30 Waterproof Bag	x2
Adhesive Hook & Loop	x12
CB22 Carry Case	x1



TL60-K2 Four Light Kit for TL60

Tube Light TL60	x2
Retaining Clip	x2
Power Adapter	x2
Remote (RC-R9)	x1
DC Power Cable	x2
RJ45 Cable	x2
Wirerope	x4
Fixed base	x2
Toggle clip	x2
CB39 Carrying Bag	x1




TL60-K4 Four Light Kit for TL60

Tube Light TL60	x4
Retaining Clip	x4
Power Adapter	x4
Remote (RC-R9)	x1
DC Power Cable	x4
RJ45 Cable	x4
Wirerope	x8
Fixed base	x4
Toggle clip	x4
CB40 Carrying Bag	x1



RGBWW Tube Light

TL120

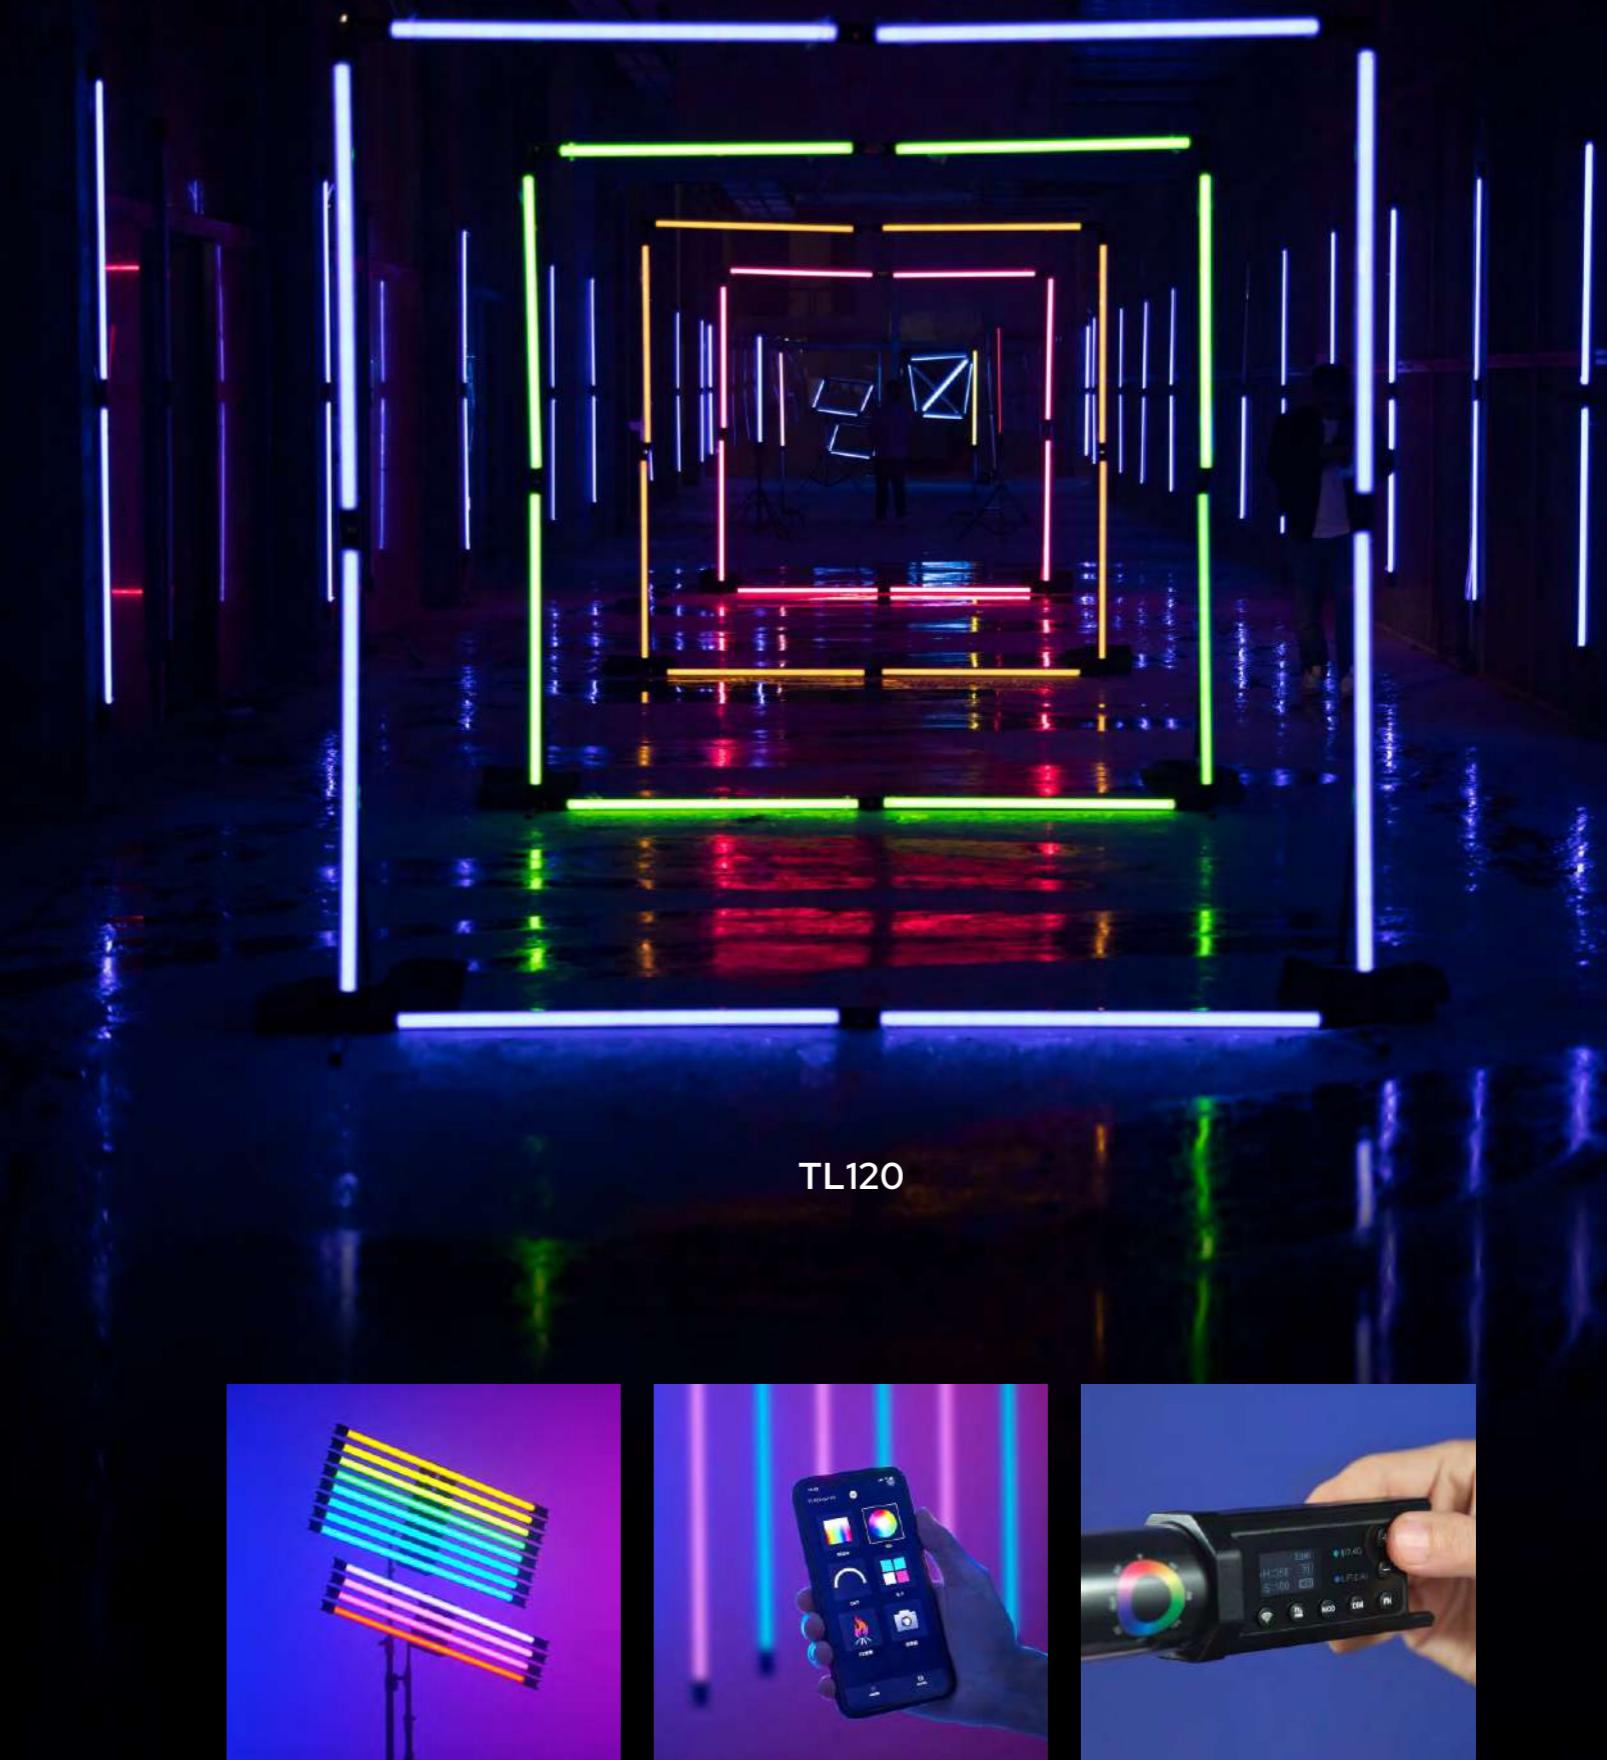

Multi-Light Bracket



Godox Light App Control



On-board Control

RGBWW Tube Light

Tech Specs

LED Light	TL120
Built-in Lithium Battery	14.4V/5200mAh/74.88Wh
Adapter	20V/4.8A
Output Power	30W
Channel	32
Group	6 (A B C D E F)
Color Temperature Range	2700K~6500K
Light Brightness Range	0%~100%
RGB Color Gamut	0 ~ 360°
CRI (≈)	96
TLCI (≈)	98
Duration(continuous output in)	150 minutes
100% full power in 2700K or 6500K)	
Control Method	Smartphone APP/2.4G wireless/DMX control
Bluetooth Wireless Control Distance	≈30m
2.4G Wireless Control Distance	≈50m (with optional RC-R9 remote control)
Operation Temperature	-10~40 °C
Dimension	48*1170mm
Net Weight	1.27kg

CCT	Illumination Unit	1m	2m	3m
2800K	lux	659	202	101
	fc	61.2	18.8	9.4
3200K	lux	610	187	93.3
	fc	56.7	17.4	8.7
4300K	lux	666	205	102
	fc	61.9	19	9.5
5600K	lux	685	210	104
	fc	63.7	19.5	9.7
6500K	lux	769	234	117
	fc	71.3	21.7	10.9



TL120

Optional Purchase



TL-G120
Grid

LSA-18
Adapter Holder

TL-B2
2-light Bracket

TL-B4
4-light Bracket

TL-B8
8-light Bracket

TL120-K4

Light Body	x4
5m Power Cord	x4
Adapter	x4
RJ45 Cable	x4
Clip	x8
Steel Cable	x8
Adapter Holder	x4
Remote control RC-R9	x1
Carry Bag CB47	x1



RGBWW Tube Light

TL180



TL180

RGBWW Tube Light

TL180



Optional Purchase



TL180-B2
Two-light Bracket Kit



TL180-B4
Four-light Bracket Kit




TL-G180
Grid for TL180

Tech Specs

LED Light	TL180
Built-in Lithium Battery	14.4V/9000mAh/129.6Wh
Adapter	20V/5.5A
Power	Max.55W
Duration(continuous output in 100% full power)≈	160 minutes
Channel	32
Group	6 (A B C D E F)
Color Temperature Range	2700K~6500K
Light Brightness Range	0%~100%
RGB Color Gamut	0 ~ 360°
CRI (≈)	96
TLCI (≈)	98
Control Method	Smartphone APP/2.4G Wireless/DMX Control
Bluetooth Wireless Control Distance	≈30m
2.4G Wireless Control Distance	≈50m (with optional RC-R9 remote control)
Operation Temperature	-10~40 °C
Dimension	51*1800mm
Net Weight	2.2kg

Illuminance Data

CCT	Illumination Unit	1m	2m	3m
2700K	lux	776	253	145
	fc	72.1	23.5	13.5
3200K	lux	672	234	125
	fc	92.7	21.8	11.6
4300K	lux	687	240	128
	fc	63.8	22.3	11.9
5600K	lux	729	254	136
	fc	67.8	23.6	12.6
6500K	lux	895	312	167
	fc	83.2	29	15.5

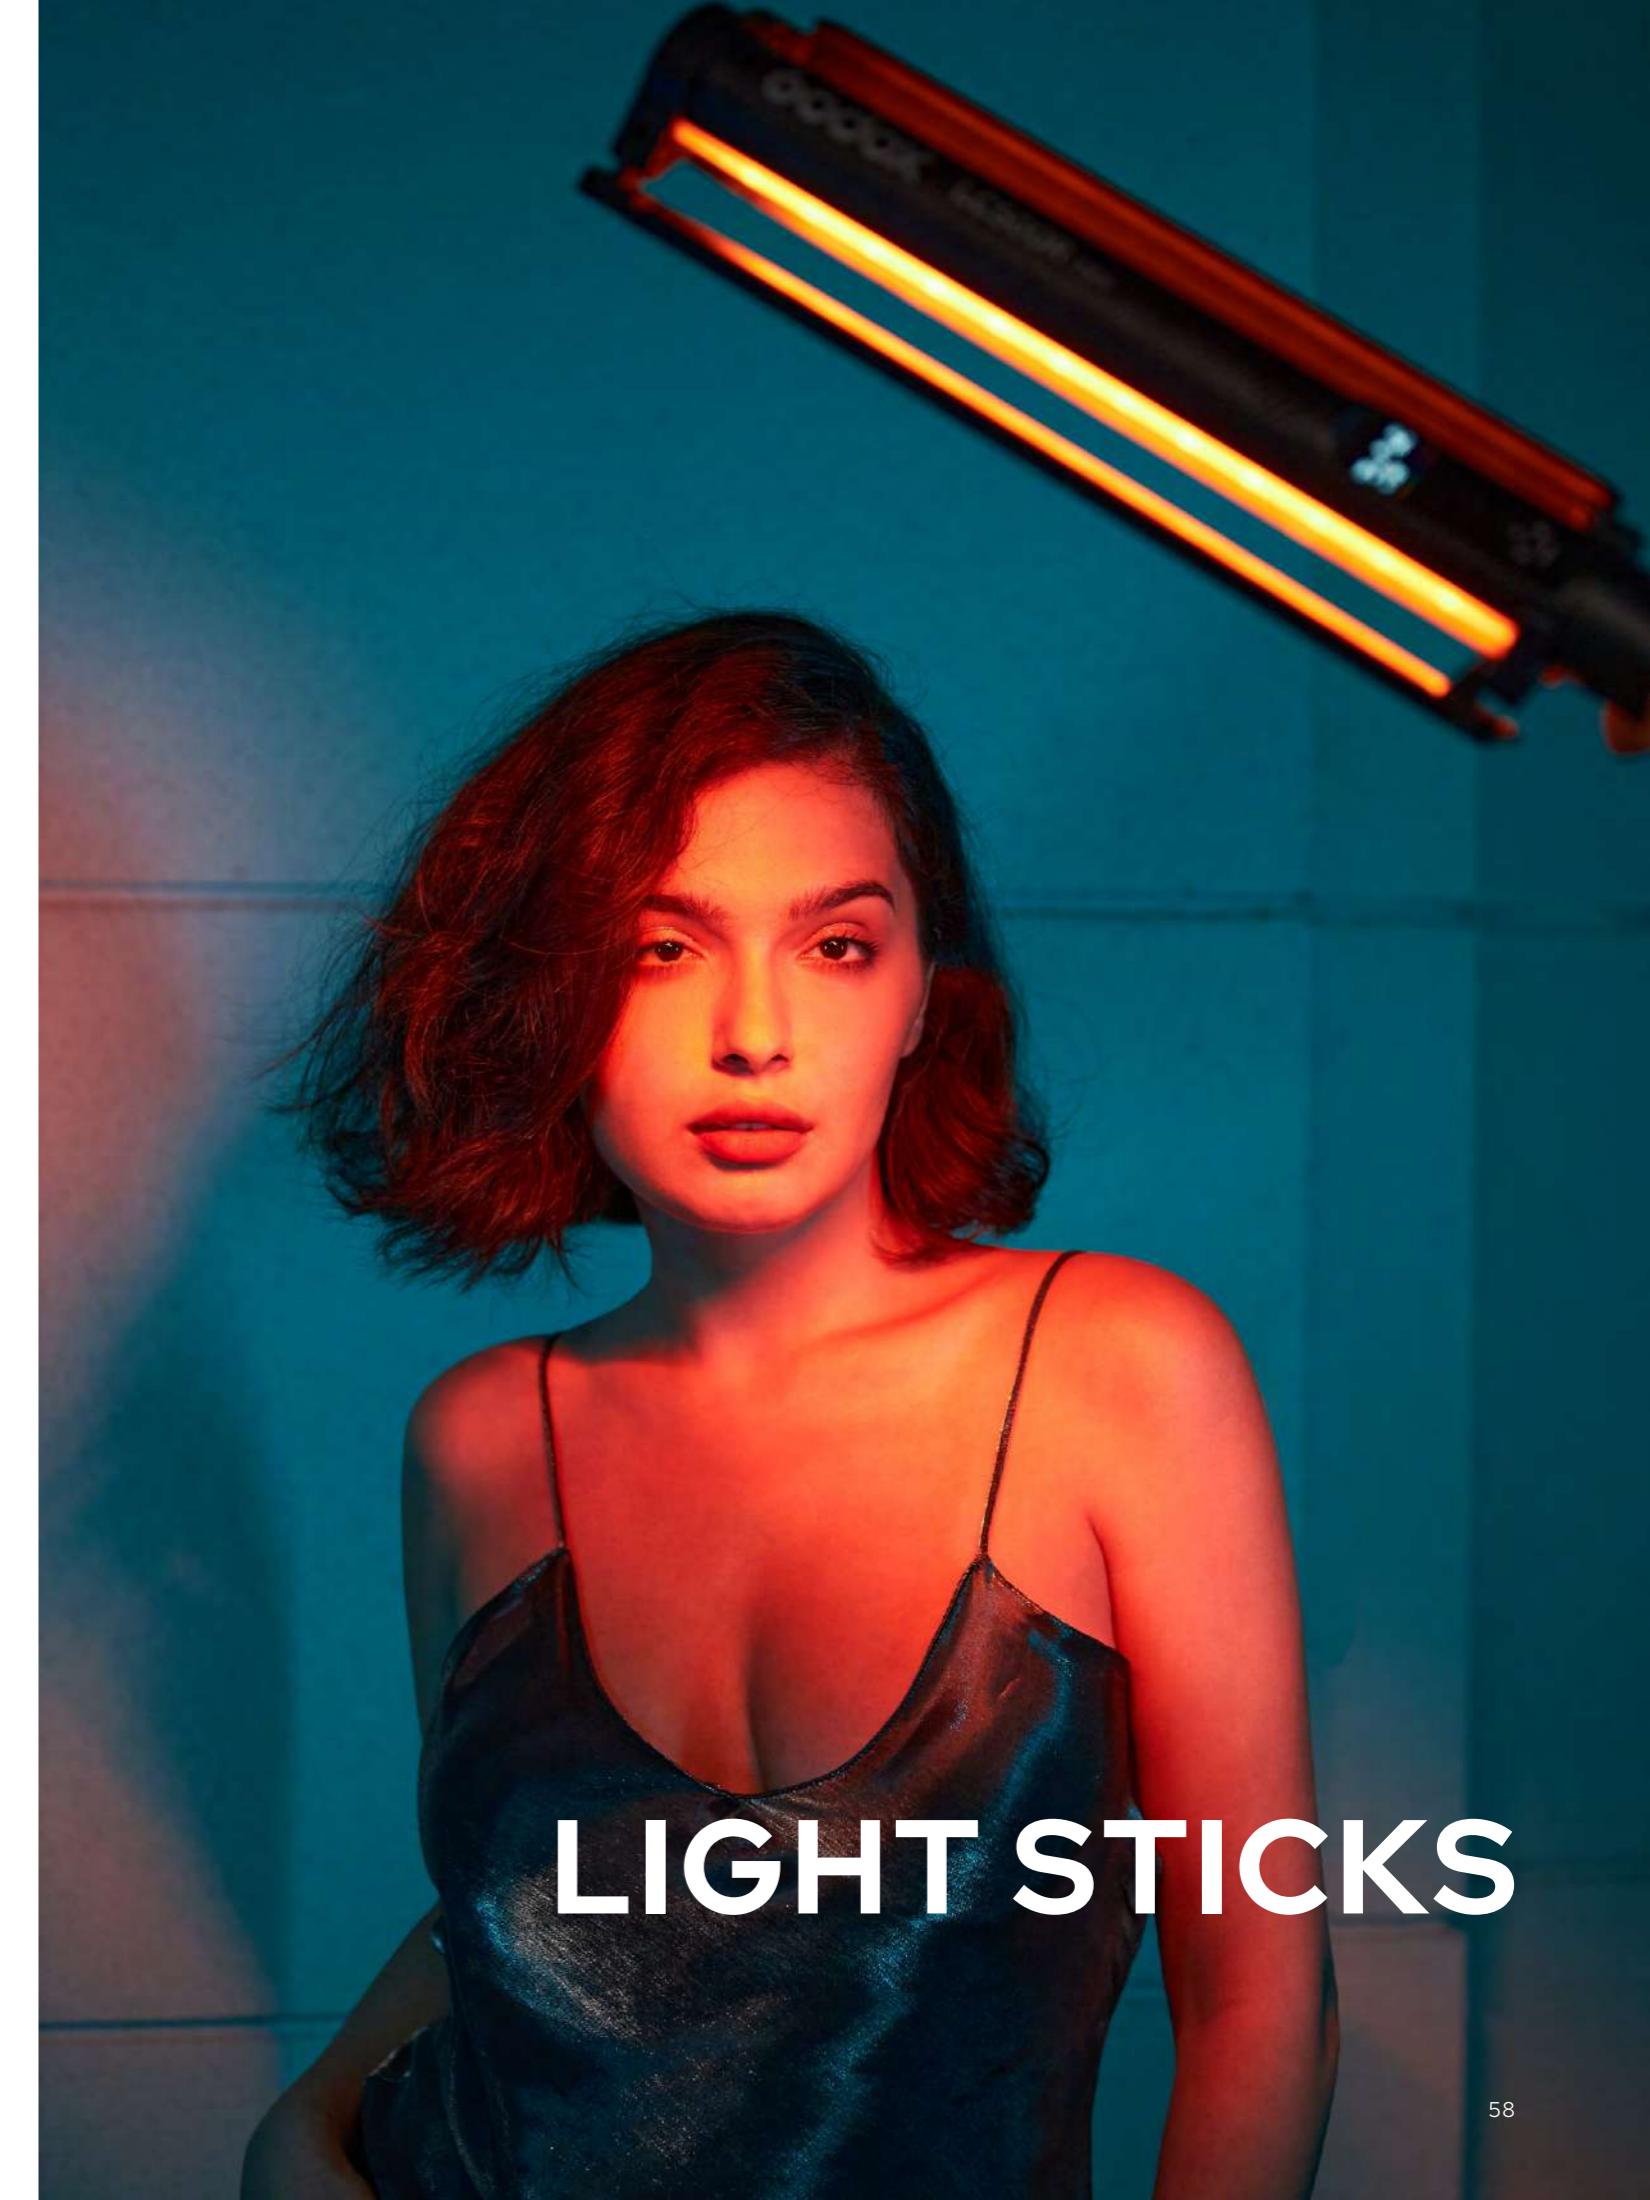

Light Sticks

LC500mini/LC500Rmini



LC500Rmini

LC500mini



1580Lux(R)
5600K@1m



Barndoors



CRI
95+

CRI 95+



CRI
96+

TLCI 96+



Compact Design



Replaceable
Battery Handle



2500K-8500K



11FX/15FX
Effects



Godox Light App

Featuring a replaceable battery handle, the LC500mini/LC500Rmini excels in outdoor shooting endurance. Compact at 1.5 feet and about 1.2 pounds, it's highly portable. The optical lens design enables 1580 lux at 20 watts. Discover a new level of portable brilliance with the LC500mini/LC500Rmini.

Key Features

- Battery Grip Convenience
- Compact at 1.5 feet and about 1.2 pounds
- 1580 Lux from 20W
- 2,500K-8,500K Color Temperature
- Shape Light with Barndoors
- 11 built-in FX effects
- APP Control

Optional Purchase



LC-D01
Diffuser forLC500 mini
& LC500R mini



BG01
Grip Handle
(with Built-in Battery)



BG01
Grip Handle
(with Built-in Battery)

Light Sticks

LC500R/LC500



LC500

LC500R




3300K/5600K
Variable Color
Temperature

Key Features for LC500R

- Freely switch LED bicolor mode, colorful light mode and 39 situational special effects modes
- Easy to adjust color temperature, light brightness, hue and color saturation
- Wireless remote control (optional) offers great convenience
- With easy operation and wide application

Key Features for LC500

- With high color rendering index(CRI>95, TLCI≥95) and even illumination to present the objects authentically.
- Freely choose cold or warm color temperature. And the light brightness can be adjusted from 10% to 100%.
- Built-in lithium battery with long-lasting power supply.
- Optional remote control to wirelessly(6 groups & 16 channels) adjust the light for convenient shooting.
- Lightweight, portable and widely applicable.

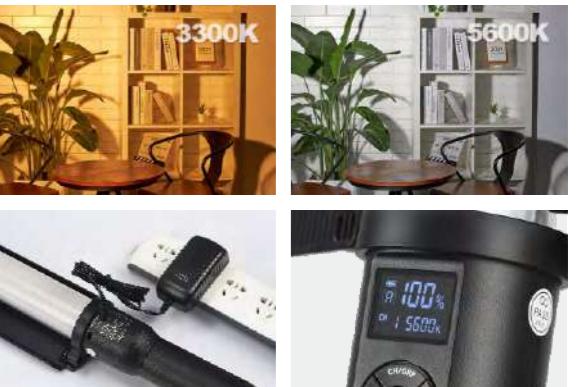

With built-in lithium battery and
it's easy to charge

Clear LCD panel and easy
operation



Wireless remote control
(Optional)



Comes with a carrying bag for
easy transport and carriage

Light Sticks

LC1000R/LC1000Bi



LC1000R



LC1000Bi

POWER
100W

100W Output



Multiple
Color Modes



Smooth
Soft Lighting



Versatile
Power Options


Introducing the LC1000Bi/LC1000R LED Light Stick—with powerful illumination, delivering impressive brightness at 100W in P mode.

Ignite creativity with dynamic RGB colors and enjoy smooth, professional-quality lighting for various settings. Versatile power options ensure user-friendly operation in any environment, keeping you charged. Transform scenes with 11/15 built-in FX effects, perfectly synchronized with music. Elevate your video-shooting game today!



Key Features

- Powerful Lighting Output
- Dazzling Creations with Dynamic RGB Colors
- Smooth & Pro-Quality Illumination
- Designed for Effortless Handling
- Long Battery Life (Normal mode:Max.≈59min, P mode:Max.≈28min)
- Multiple Charging Options
- 11/15 built-in FX effects
- 2500K-8500K
- Easily Controlled via Device or App
- TLCI 96+ and CRI 96+

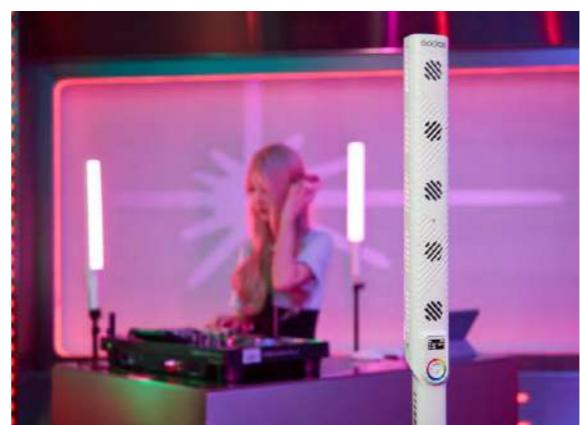

LC1000R/LC1000Bi

Light Sticks

LC1000R/LC1000Bi



Optional Purchase



Grid

Tech Specs

Model	LC1000R	LC1000Bi
Built-in Lithium Battery	21.6V/2600m Ah 56.16Wh	
Battery Life(at 100%)	Normal mode:Max.≈59min, P mode:Max.≈28min	Normal mode:Max.≈49min, P mode:Max.≈27min
brightness, 5600K)		
Type-C Input	5V/9V/12V/15V/20V100W(Max.)	
DC Input	20V=6A	
Input Power	Normal Mode:Max.≈65W, P mode:Max.≈100W	
CCT	2500-8500K	
Brightness Range	0%~100%	
FX Type	15	11
CRI	Average≥96	
TLCI	Average≥96	
Control Method	Bluetooth Control/Light Body Control	
Bluetooth Control	Max. 30m	
Distance		
Working Environment	-10°C ~+40°C	
Temperature		
Dimension	2.2" * 21.97" * 1.89"	
(Including Grip Handle)		
Net Weight≈	1kg	


Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R (RGBWW)



Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R (RGBWW)

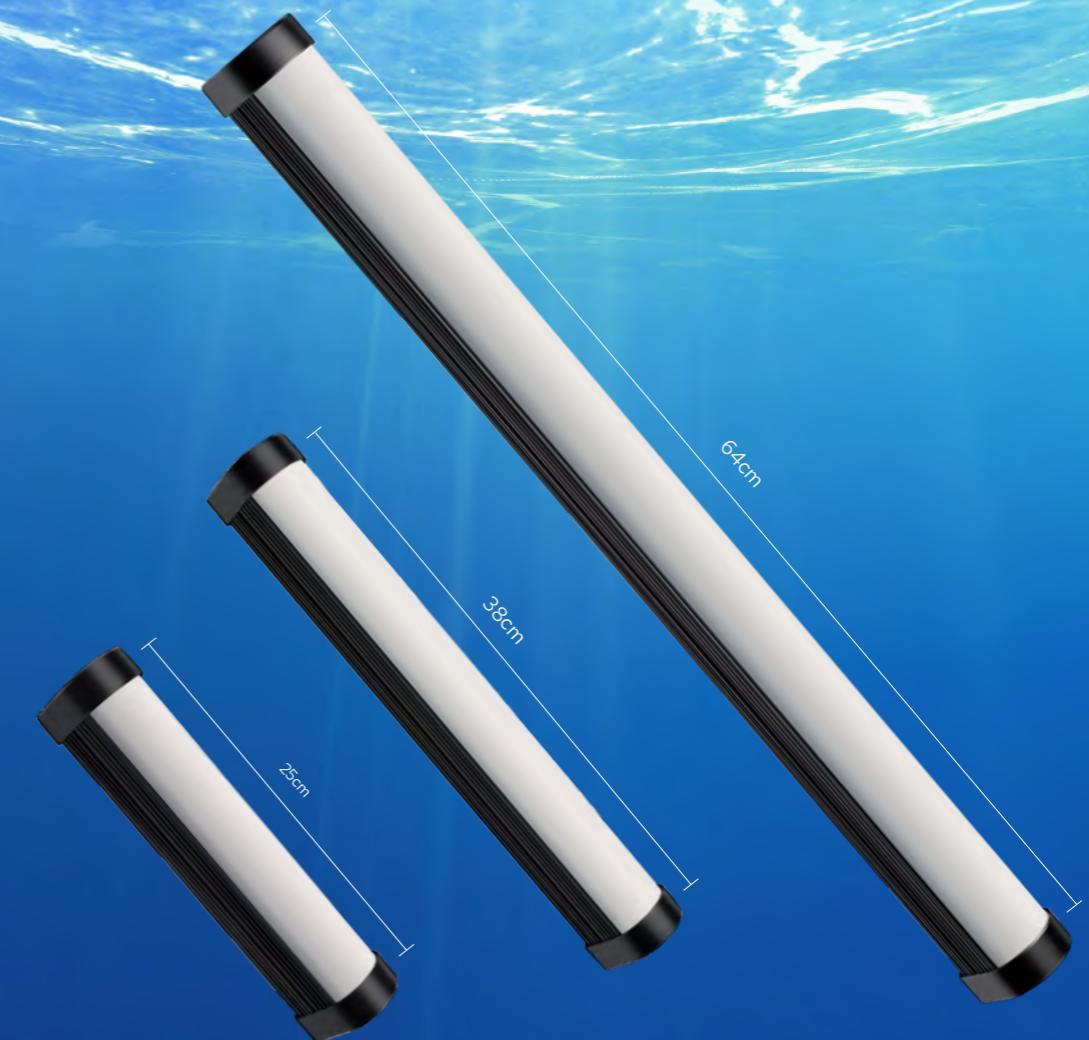

WT25D WT25R

WT40D WT40R


WT60D WT60R

The diving lights bring a completely new way to light up underwater, even at 40m. Rarely found in traditional dive lights, they are tube-like in shape easily to be adjusted for different lighting angles for your desired effects. The unique shape makes it feasible to illuminate a wider area, discovering more wonders beneath the sea. The light it produces is remarkably smooth, adding a dreamlike atmosphere when applied to underwater portraits.

Key Features

- Offer exceptional water resistance and can perform at a professional level even when submerged up to 40m.
- Switch to high power automatically when submerged, offering more brightness.
- Equipped with a fluorescent button for easy on/off, mode changes, color adjustments, and other actions.
- The tube design creates a diffused and evenly distributed light.
- Standby time of up to 2 hours (WT60R/WT60D) at their maximum brightness in underwater mode.


Dive Lights

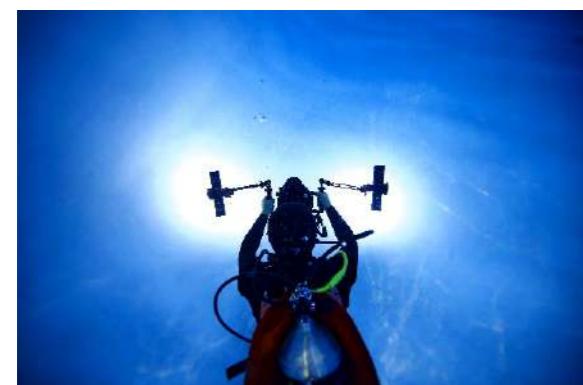

Tech Specs

Model	WT25D	WT40D	WT60D
Power supply	5V/2.5A, 9V/1.5A, 12V/1A, 15V/0.8A, 20V/0.75A	5V/3A, 9V/3A, 12V/3A, 15V/2.7A, 20V/2A	20V/3.25A
Power underwater	Max. 24W	Max. 54W	Max. 70W
Power abovewater	Max. 10W	Max. 13W	Max. 21W
Charging port	Type-C	Type-C	DC input port
CCT	5600K±300K	5600K±300K	5600K±300K
TLCI	≥96	≥96	≥96
CRI	≥96	≥96	≥96
Brightness adjustment range	0%-100%	0%-100%	0%-100%
Waterproof rate	IP68 (40 meters underwater)	IP68 (40 meters underwater)	IP68 (40 meters underwater)
Charging time	2h at the soonest	2h20min at the soonest	2h40min at the soonest
Battery life (100% brightness)	≈1h (underwater) ≈2h20min (abovewater)	≈1h20min (underwater) ≈5h30min (abovewater)	≈2h (underwater) ≈6h (abovewater)
Control Method	Bluetooth APP control	Bluetooth APP control	Bluetooth APP control
Bluetooth control distance	≈25m (only abovewater)	≈25m (only abovewater)	≈25m (only abovewater)
Working environment temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	57*52*250mm	57*52*380mm	57*52*640mm
Net weight	0.64kg	1.08kg	1.9kg

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(RGBWW)

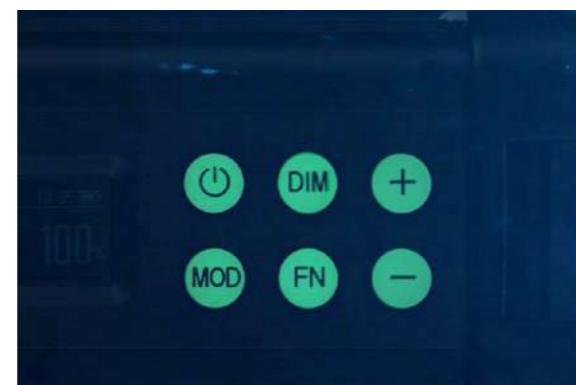

Optional Purchase



Light clamp WT-C01

Dive Lights



WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(RGBWW)

Tech Specs

Model	WT25R	WT40R	WT60R
Power supply	5V/2.5A, 9V/1.5A, 12V/1A, 15V/0.8A, 20V/0.75A	5V/3A, 9V/3A, 12V/3A, 15V/2.7A, 20V/2A	20V/3.25A
Power underwater	Max. 20W	Max. 55W	Max. 77W
Power abovewater	Max. 7W	Max. 15W	Max. 14W
Charging port	Type-C	Type-C	DC input port
CCT	1800K-10000K	1800K-10000K	1800K-10000K
TLCI	≥96	≥96	≥96
CRI	≥96	≥96	≥96
Brightness adjustment range	0%-100%	0%-100%	0%-100%
Mode	CCT Mode/HSI Mode/ RGBW Mode/GEL Mode/FX Mode	CCT Mode/HSI Mode/ RGBW Mode/GEL Mode/FX Mode	CCT Mode/HSI Mode/ RGBW Mode/GEL Mode/FX Mode
Waterproof rate	IP68 (40 meters underwater)	IP68 (40 meters underwater)	IP68 (40 meters underwater)
Charging time	2h 10min at the soonest	2h 20min at the soonest	2h at the soonest
Battery life (100% brightness)	≈1h (underwater) ≈3h (abovewater)	≈1.5h (underwater) ≈5.8h (abovewater)	≈2h (underwater) ≈10h (abovewater)
Control Method	Bluetooth APP control	Bluetooth APP control	Bluetooth APP control
Bluetooth control distance	≈25m (only abovewater)	≈25m (only abovewater)	≈25m (only abovewater)
Working environment temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	57*53*250mm	57*53*380mm	57*53*640mm
Net weight	0.66kg	1.1kg	1.9kg



STREAMING LIGHTS

E-sports LED Light

ES30



E-sports LED Light

ES30



ES30



Key Features

- Ultra-soft lighting with edge-lit technology
- Gentle on the eyes
- Brightness stepless adjustment from 0-100%
- Color temperature adjustable from 2800K-6500K
- No fan, no fan noises, good for streaming
- Godox Light APP control available
- Slim body suitable for narrow space
- Selectable between desktop stand and desk-mount clamp

Tech Specs

Model	ES30
Adapter Input	100-240V~50/60Hz 1.0A
Adapter Output	14V=2.5A
Power	Max.35W
CCT	2800-6500K
CRI	96+
TLCI	97+
Brightness Range	0~100%
Control Method	Light body control/Bluetooth control
Working Temperature	-10°C~40°C
Dimension	233*233*42mm
Net weight	0.74kg

ES30 Kit 1

Light Body
Adapter
Power Cable
Telescopic Desk
Mount Stand



ES30 Kit 2

Light Body
Adapter
Power Cable
Telescopic Desktop Stand



Illuminance Data

CCT	Illuminance unit	0.5m	1m	2m
2800K	lux	1190	315	87.1
	fc	111	29.3	8
3200K	lux	1510	399	110
	fc	140	37.1	10.2
4300K	lux	2280	602	167
	fc	212	56	15.5
5600K	lux	1550	408	113
	fc	144	37.9	10.5
6500K	lux	1330	350	96.9
	fc	123	32.5	9

All the above tests are based on the condition of 100% brightness

E-sports LED Light

ES45



Designed especially for E-sports streamers, ES45 Kit is built to last with solid metal while keeping incredible slim and space-saving. It is bright enough to illuminate your streaming space yet still comfortably soft to your eyes. Embrace the ES45 Kit and just WOW. You look much more professional than before.

Key Features

- Magnetic Auto-Charging Remote Controller
- Adjust color and brightness with the wireless 2.4 GHz controller. It's detachable from the light and reattaches magnetically to charge.
- IOS/Android Smartphone Control: Godox Light app
- The ES45 renders soft light that is especially flattering to skin tones and complexions, so you'll always look your best.



Photographer: VJUS AS

Tech Specs

Model	ES45 Kit
DC Power Supply by Adapter	Input: 100~240V 50/60Hz 1.3A Output: 14.8V 3.42A
Lithium Battery of Operate Panel	3.7V Lithium battery (built-in)
Power	Up to approx. 47.6W in max. (color temperature: 4100K)
Channel	32 (1~32)
Group	3(A, B, C)
Color Temperature	2800 ~ 6500K
100% Lumen (lm)	Max. 2500
100% Luminosity (lx)	Max. ≈ 4100 (darkroom, 0.5m distance)
CRI	> 96
TLCI	> 97
Brightness Range	0~100%
Control Method	Smartphone APP/2.4G Wireless
Quantity of LED Beads	176
Working Environment Temperature	-10~40°C
Dimension	367 * 230 * 31.04mm (operate panel is not included)
	367 * 230 * 45.9mm (operate panel is included)
Weight	1.33KG (operate panel is included)

LED Ring Light

LR120/LR150



LR120



LR150

LED Ring Light LR120/LR150 is suitable for wide occasions e.g. livestream, video, make up, product shooting, etc.



LR150

Key Features

- Freely adjust color temperature and brightness
- Soft light effects and catchlight
- Easy operation
- Flexible application



Tech Specs

LED Ring Light	LR120	LR150
DC Power Supply	5V/2A	24V/2A
USB Power Output	/	5V/2A
Power	Approx. 10W	Approx. 38W
Color Temperature	3000K-6000K	3000K-6000K
100% Brightness(LUX)0.5m≈	550	1400
Light Brightness Range	0%~100%	1%~100%
CRI	> 90	> 90
TLCI	> 90	> 90
LED Beads Quantity	222	336
Operation Temperature	-10~40°C	-10~40°C
Dimension	305*395*35mm	455*555*45mm
Weight	Black version: 440g	Black version: 880g
		Warning Pink version: 870g

LED Ring Light

LR160/LR180



LR160

LR180

With cold or warm temperature and light brightness adjustment, LED Ring Light LR160 & LR180 is suitable for live, portrait shooting and make up.


There are pink version and black version for choice.

Key Features

- Premium LED beads with soft light effects.
- Adjustable light brightness and color temperature.
- DC power supply or lithium batteries (separately sold). Note: LR160 supports DC & lithium batteries power supply while LR180 only supports DC power supply.
- Included a smartphone holder to offer convenience.



Adjust LR160's color temperature by rotating the knob.

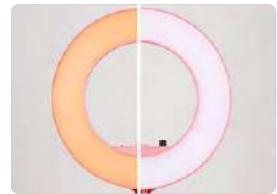


Adjust LR180's color temperature by replacing different light-passing board.




Light brightness adjustment

Tech Specs

LED Ring Light	LR160	LR180
Lithium Battery	2*7.4V Lithium battery / (NP-F970)(separately sold) /	/
DC Power Supply	16V/1.5A	16.8V/2A
Power	Approx.18W	Approx. 27W
Color	3300K-8000K	Black version: 3300K or 5600K Pink version: 3100K or 5000K
Temperature		
100% Brightness (LUX)(1M)	Below 400 (1 meter)	Black version: White light-passing board 600 Yellow light-passing board 400 Pink version: White light-passing board 600 Yellow light-passing board 500
CRI(max. brightness)	≈92	≈92
TLCI(max. brightness)	≈97	≈97
Light Brightness	10% ~ 100%	Light brightness can be adjusted.
Range		
LED Beads	160	180
Quantity		
Operation	-10°C ~ 40°C	-10°C ~ 40°C
Temperature		
Dimension	49.2*59*4cm	36.1*46*4cm
Weight	1.21kg	0.88kg (with one light-passing board)

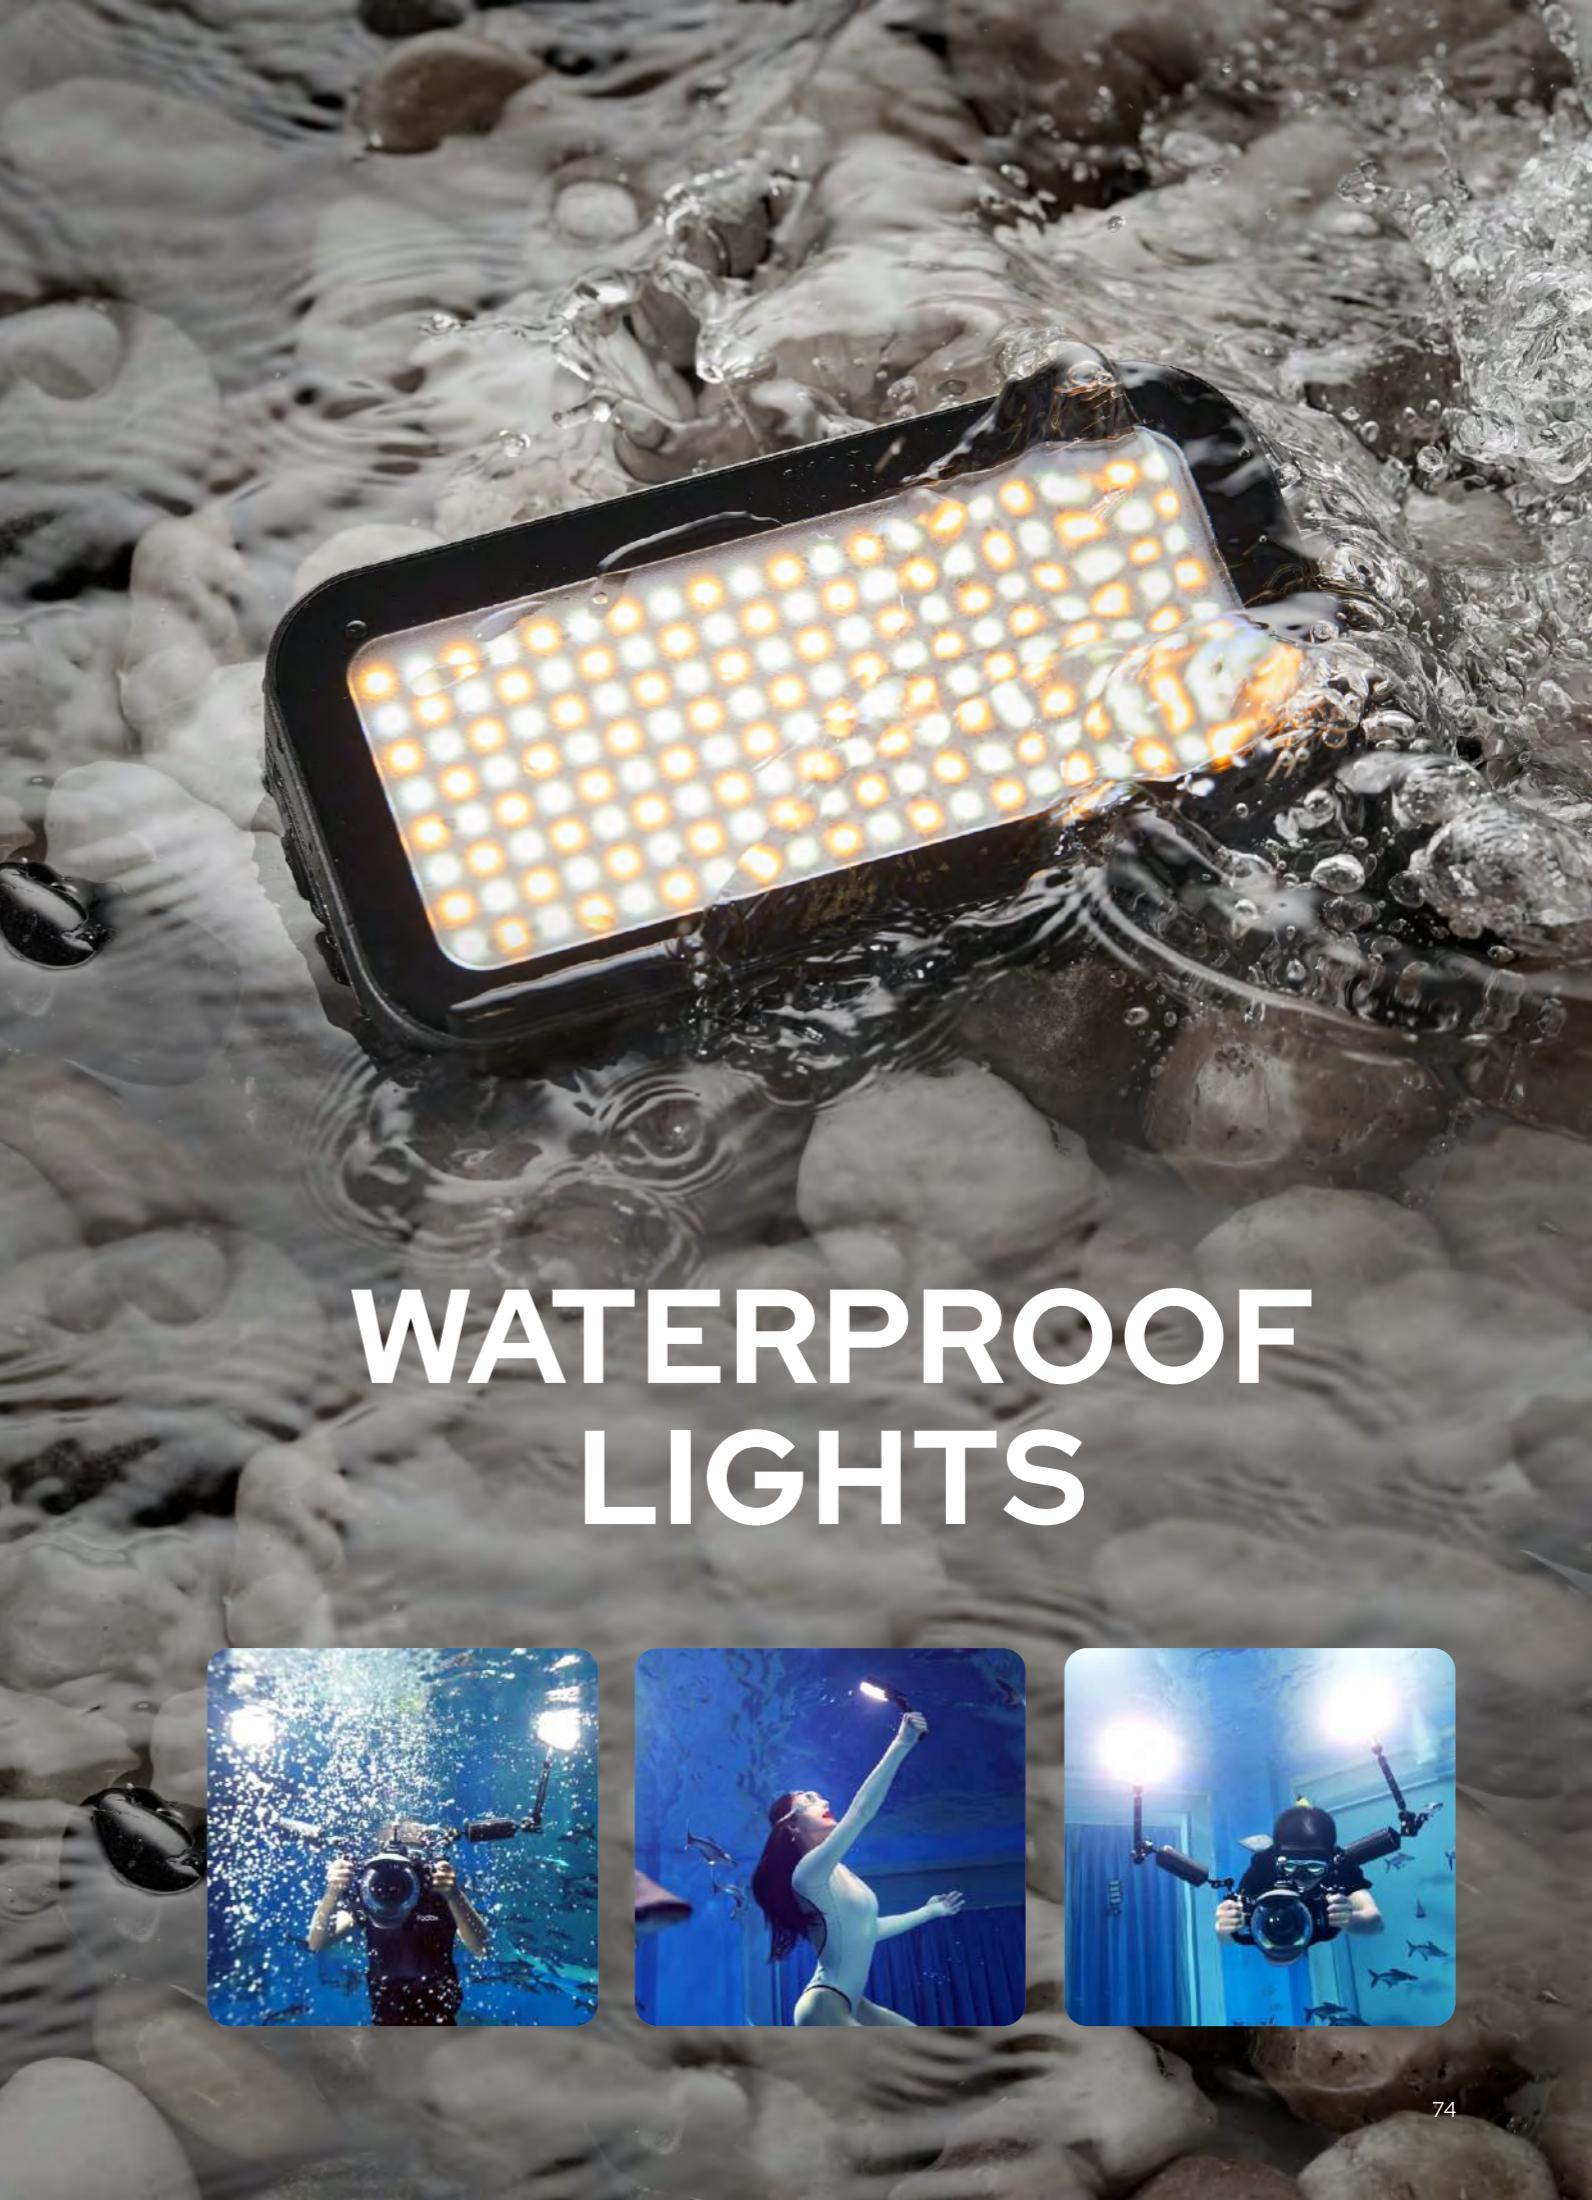

WATERPROOF LIGHTS

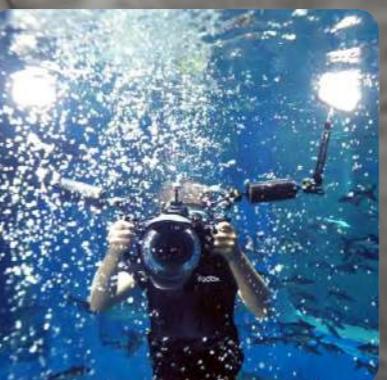

Waterproof Lights



WL4B

97

CRI

97

TLCI

IPX8
100ft Waterproof


U
Magnet
Absorption

○
Thread Hole

1/4"
Godox Light
App Control

WL4B

Waterproof Lights

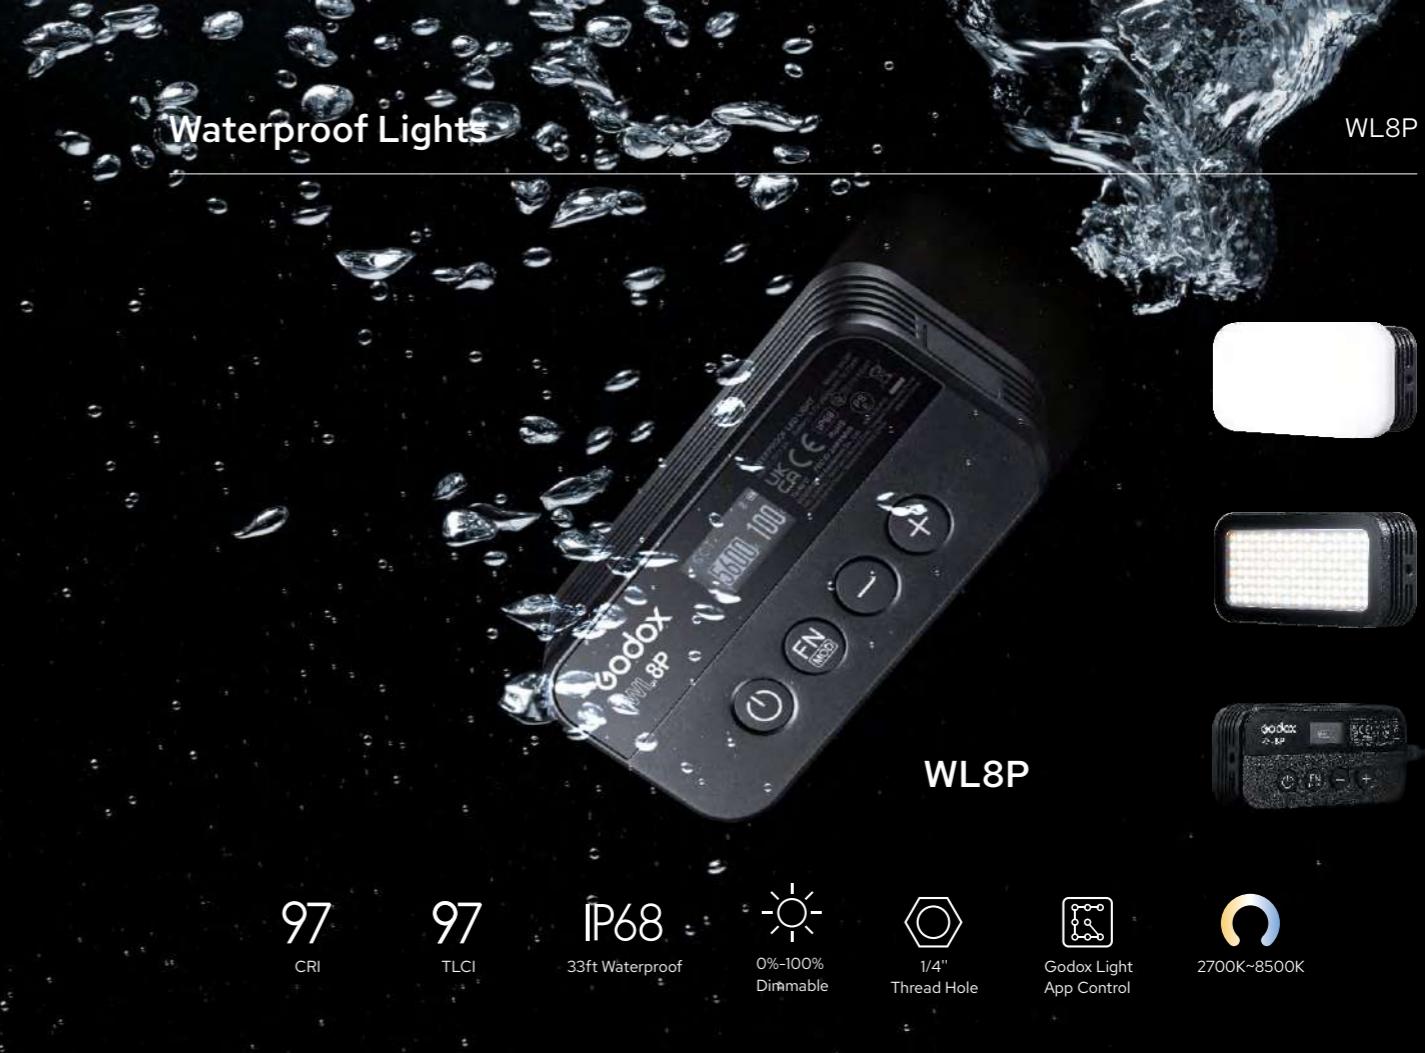

WL8P

97

CRI

97

TLCI

IP68
33ft Waterproof

○
0%-100%
Dimmable

○
1/4"
Thread Hole

○
Godox Light
App Control

○
2700K~8500K

Key Features

- A CRI/TLCI rating of 97 and the 55° beam angle make it a powerful light fixture with excellent color rendition
- Wireless control via Godox Light APP support easy brightness adjustments, FX settings and the other necessary controls
- The fixture supports 13 effects including Lighting, Flash, Broken Bulb, TV, and SOS
- The WL4B is waterproof down to 100ft, which allows you to comfortably use the fixture in wet weather as well as dry, or when submerged
- It incorporates a rechargeable battery that lasts 80 minutes at full brightness, conveniently charging via USB-C cable connecting with your power bank or other power supplies outdoors.



Tech Specs

Model	WL4B
Built-in Lithium Battery	3.8V/1500mAh
Power	Max.4W
Waterproof Level	IPX8(30m)
Color Temperature Range	5600K±300K
Max. Illumination (LUX)(0.5m)(≈)	1900
CRI(≈)	97
TLCI(≈)	97
Brightness Range	Low/Medium/High/SOS
Beam Angle	55°
Continuous Usage Time	High brightness≈1 hour and 20 minutes Medium brightness≈2 hours Low brightness≈5 hours and 30 minutes
Standard Charging Power Source	DC5V/2A
Control Method	Smartphone APP
Working Environment Temperature	-10~40°C
Dimension	45*45*47mm
Weight	116g



As a pocket-sized Led with rugged metal housing, WL8P is perfect for on-the-go shooting even in tough conditions. Featuring trustful brightness, high color fidelity and adjustable color temperature, the light combines high performance with portability, ready to cope with any wet weather shooting or realize your underwater creativity.

Tech Specs

Model	WL8P
Built-in Lithium Battery	3.7V/2900mAh/10.73Wh
Standard Charging Power Source	DC 5V/2A
Power	10W
Waterproof and Dustproof Grade	IP68(10m)
Color Temperature Range	2700K~8500K
CRI(≈)	96
TLCI(≈)	97
Brightness Range	0%-100%
Photometrics	313 fc/3370 Lux at 0.98'/0.3m 116 fc/1250 Lux at 1.64'/0.5m 30 fc/323 Lux at 3.28'/1m
Bluetooth Transmission Distance on Land	10m
Continuous Working Time	100% brightness≥1h
Control Method	Mobile phone APP
Working Environment Temperature	-10°C~40°C
Dimension	11*5.7*3.25cm
Net Weight	263g

Key Features

- Small and lightweight, easy to carry.
- IP68 rating, resistant to water up to 10m, perfect for waterside vlogging.
- 160 LED beads, dimmable from 0% to 100%, with a wide beam angle.
- Color Accuracy: CRI 96+, TLCI 97+, delivering natural, vibrant light.
- Adjustable Color Temperature: CCT mode (2700K-8500K) for flexible lighting options.
- Creative Light Effects: 8 built-in effects with 3 modes each for dramatic video effects.
- Wireless Control: Remote brightness, color, and FX control via Godox Light App.
- Long Battery Life: 2900mAh lithium battery, 1-hour runtime at full brightness.

SMARTPHONE LIGHTINGS



Magnetic Charging Full-Color LED Light

MA5R

MA5R



Wireless Power Bank



Pocket Size



220+ Min



Selfie Mode



Full Color

The MA5R is a compact device that combines the versatility of a full-color pocket light with the convenience of a magnetic wireless power bank. Offering reliable charging capabilities and vibrant lighting effects, the MA5R provides an ideal solution for those who need portable, high-quality lighting while capturing moments on the go. Its seamless design ensures effortless use, making it a perfect companion for photographers and content creators.


Key Features

- Pocket light & wireless power bank in one
- Integrated selfie light
- Wide CCT range: 1800K-10000K
- Full color versatility for creative lighting effects
- Compact design with a side thickness of just 13mm for easy portability
- Available in 6 Colors to suit various styles and preferences
- NFC & Bluetooth Connectivity for seamless control via the app




Magnetic Charging Full-Color LED Light

MA5R

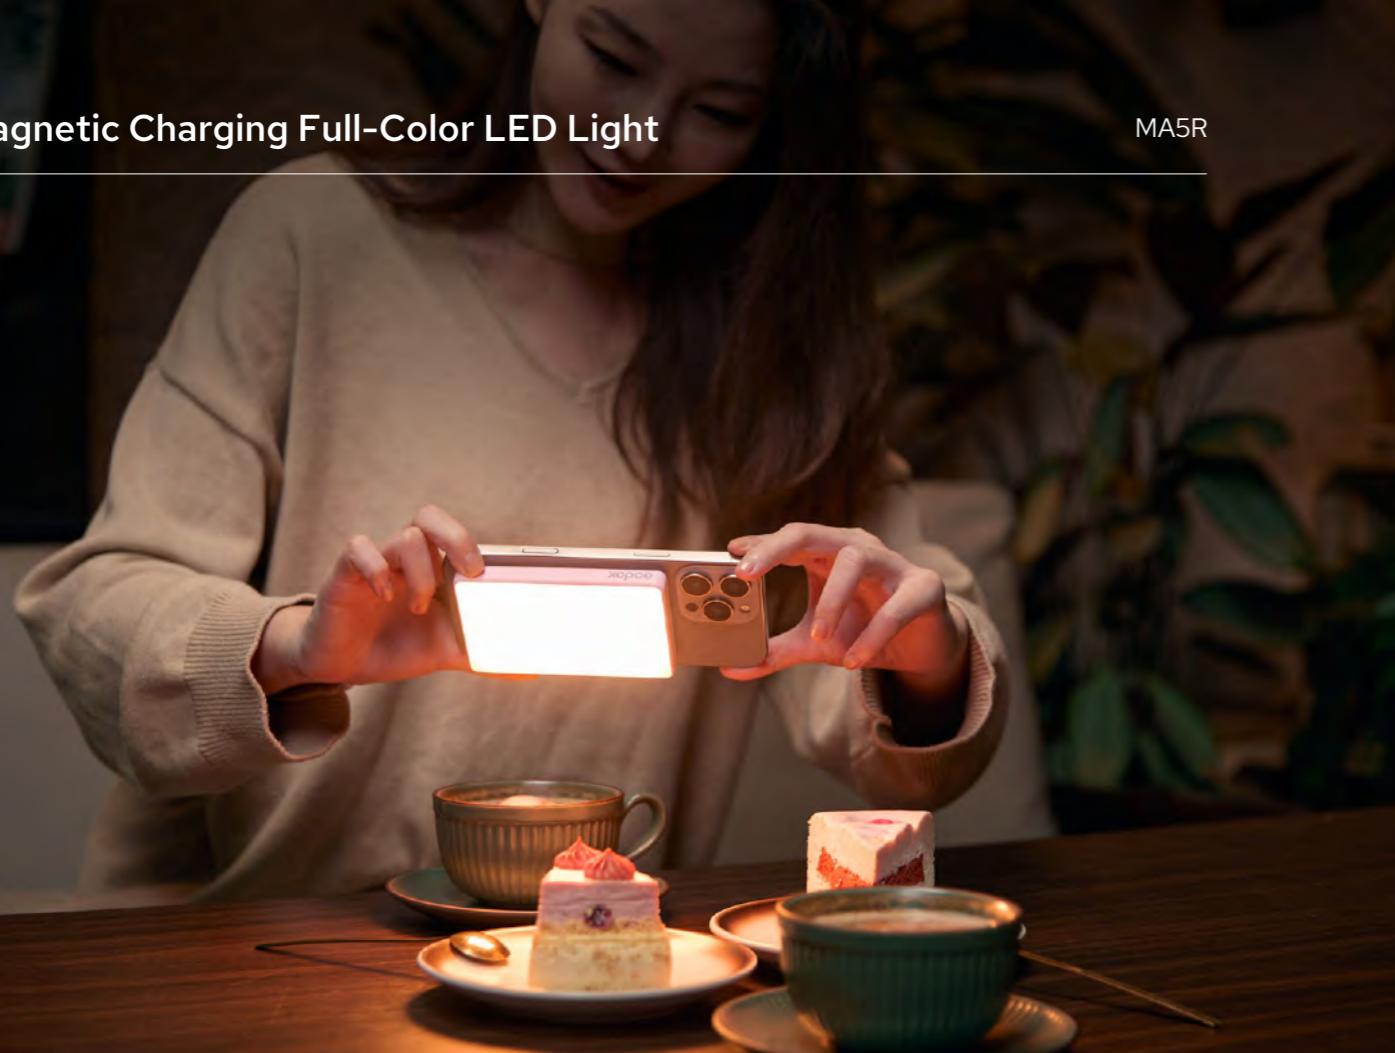

Color Options

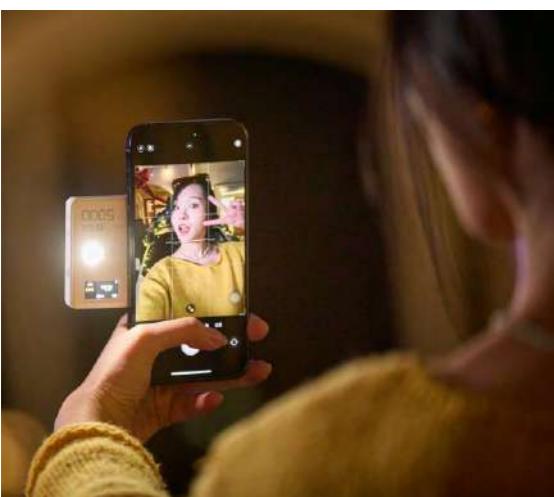

Tech Specs

Model	MA5R
Lithium Battery Parameters	3.7V 4900mAh 18.13Wh
Power	Filling lamp: 5W Selfie lamp: 0.8W
USB-C Charging Port	Input: 5V=3A, 9V=2.22A, 12V=1.67A, 18W(Max.) Output: 5V=3A, 9V=2.22A, 12V=1.67A
Charging Time	≈1h 30min
Working Time	≈3h 40min(100% brightness output) ≈7h 20min(50% brightness output)
CCT	Filling lamp: 1800K-10000K Selfie lamp: 2800K-6500K
GM Adjust	-50~+50
Brightness Range	0%~100%
FX Modes	14
CRI	Filling lamp: average≥95 Selfie lamp: average≥96
TLCI	Filling lamp: average≥97 Selfie lamp: average≥98
Controlling Methods	Bluetooth app/Light Body Control
Bluetooth Controlling	30m
Distance	
Working Environment	-10°C~40°C
Temperature	
Dimension	≈4.21" * 2.68" * 0.51"
Netweight	≈164g

Dual-Sided Magnetic Tripod

AM01

AM01



N52 Magnet



Dual-sided Attraction



Versatile Usage



Bonus Magnetic Ring

The AM01 is powered by N52-grade magnets, offering a strong, secure hold for your MA5R or smartphone. Its dual-sided magnets keep your MA5R steady on one side while holding other items firmly on the other. Easily transform it into a magnetic tripod, or mount it to your camera using the cold shoe adapter. Plus, the bonus magnetic ring ensures a reliable connection for sturdy performance.



Key Features

- N52 Magnets
- Dual-Sided Attraction
- A Tripod or Mount on Camera
- Bonus Magnetic Ring
- Foldable and Portable



Smartphone Lightings

R1/M1

R1



M1



Free Color Adjustment



Blink with Music



39 Special Effects



Free Color Adjustment



Blink with Music



40 Special Effects

Key Features

- This light can change multiple colors to achieve creative light effects. With approx. 98 CRI and 97 TLCI, it can present projects authentically.
- There're 39 different patterns in RGB scene mode, e.g. music, lightning, screen, RGB quick recycle, RGB slow recycle, candlelight, police car, fire truck, ambulance, etc.
- Built-in Lithium Battery and Charge with Type-C USB Port, Freely adjust light brightness from 0% to 100%. It supports continuous work for 1.5 hour in full power.
- Compatible with Various of Accessories and Achieve More Light Effects With magnetic accessory port, this light supports to install AK-R1 round head accessories (separately sold) and achieve creative shooting.
- With built-in magnet, this light can be quickly pasted onto the back of smartphone, which saves a lot of time and energy.

Tech Specs

Model	R1
Built-in Lithium Battery	1800mA
Power	Max. 5W
Charging power supply	5V1A, 5V2A
Color temperature range	2500K~8500K
100% Illuminance(LUX)(0.5m)(~)	605
CRI(~)	98
TLCI(~)	97
Light brightness range	0%~100%
Duration(continuous output in 100% power)	Approx. 90 Minutes
Operation temperature	-10~45°C
Dimension	Diameter: 75mm; Thickness:23mm
Net weight	150g

Tech Specs

Model	M1
Charger(separately sold)	5V2A/18W QC3.0(5V3A,9V2A,12V1.5A)
Power	Max. 13W
Color temperature range	2500K~8500K
Light brightness range	0%~100%
RGB Color gamut	0~360°
100% Illuminance(LUX)	Max. 1700
CRI(~)	97
TLCI(~)	97
Bracket rotation angle	Main axis: 360°; Inside axis: 270°
Duration(continuous output in 100% power)	150 Minutes
Operation temperature	-10~45°C
Dimension	145*70*15mm
Net weight	240g

Smartphone Lightings

LEDM32/LEDM150



LEDM32



LEDM150



With the light weight and convenient operation, LEDM32 & LEDM150 Mini Light is excellent for all kinds of mobile phones.

Key Features

- High-quality LED bulbs
- Built-in lithium battery
- Soft and even illumination
- Adjustable light brightness
- With the optical control flash fire function
- With a lightweight and portable body
- Fit almost any mobile phones

Tech Specs

LED Light	LEDM32	LEDM150
Built-in Lithium Battery	3.7V/300mA	3.7V/3000mAh
Power	Max. 1.4W	Max. 9W
Color Temperature	5200K±300K	5600K±300K
Brightness (LUX)	>120(0.5m)	1029(0.5m)
Color Rendering Index	≥95	>95
TLCI	≥94	≥94
Light Brightness Range	10%~100%	10%~100%
LED Beads Quantity	32	150
Operation Temperature	-10~50°C	-10~50°C
Dimension	50*50*28mm (not with the L-type Bracket and Mounting Bracket)	132*80*20mm
Net Weight	30g	170g

ITEMONS



Litemons LED Light

LE200Bi/LE300Bi/LE600Bi



Key Features

- Integrated Power Supply--No External Adapter Required
- LE200Bi: 57700lux (@5600K, 1m); LE300Bi: 58900lux (@5600K, 1m)
- TLCI≈98, CRI≈98
- Flat Bowens Mount Compatibility
- Wired DMX/CRMX/APP Control
- Brand New Bluetooth Reset Button and NFC Addition
- Robust Metal Body and Ultra-Quiet Fan
- An ideal Solution for Livestreaming, Podcasting, Video Production and Photography

LE200Bi/300Bi/600Bi



Light Body x1 Reflector BR30A x1 AC Power Cord x1

Tech Specs

Model	LE200Bi	LE300Bi	LE600Bi
AC INPUT Port	100V-240V ~ 50/60Hz		
	220W	315W	610W
CCT Range	2800K ~ 6500K		
Brightness Range	0% ~ 100%		
FX Modes	11		
CRI	≈98	≈97	
TLCI	≈98	≈99	
Controlling Methods	Wired DMX/RDM, Bluetooth, Light Body Control		
Bluetooth Controlling	30m		
Distance			
USB-A Port	Firmware upgrade/5V=1.5A power supply		
Working Environment	-20°C~45°C		
Temperature			
Dimension	≈6.22" * 9.41" * 10.31"	≈6.22" * 9.41" * 10.31"	≈10.71" * 11.10" * 15.63"
(without reflector)			
Net Weight	≈2.9kg/6.4lb	≈2.9kg/6.4lb	≈4.77kg/10.6lb
(without reflector)			

Litemons LED Light

LA600R/LA600Bi



Key Features

- Full/Bi-color LED COB light
- 600W high power delivers 212,500 Lux@1m with LA600Bi
- Wide CCT range: 1,800-10,000K(R)/2,800-6,500K(Bi)
- Cinema-grade Color Accuracy
- Flat bowens mount compatibility for diverse needs
- DMX & App control support
- NFC tap-to-pair multi-light technology
- Built-in 14 FX effects
- 48V XLR power supply for stable high-output performance

LA600R/Bi(White Version)




Light Body x1 Adapter x1 AC Power Cord x1 Steel Rope x1 Reflector BR30 x1 Storage Bag x1

* Tips: The black version is available for purchase, with identical specifications.

Tech Specs

Model	LA600R	LA600Bi
Power Supply	100V-240V~50/60Hz	
DC Port Input Power	48V-600W(Max.)	
CCT Range	1800K-10000K	2800K-6500K
GM Adjustment	-100%-100%	\
Brightness Range	0%-100%	
FX Modes	14 Types	11 Types
CRI	Average≥95	
TLCI	Average≥95	
Controlling Methods	Wired DMX Control, support RDM protocol/Bluetooth app/light body control	
Bluetooth Controlling Distance	60m	
USB-A Port	Firmware Upgrade/5V 1.5A Power Supply	
Working Environment Temperature	-20°C~45°C	
Dimension (without reflector)	≈10.83" * 11.5" * 14.76"	
Net Weight (without reflector)	5.1kg	4.5kg

LA600R/Bi K1(White Version)

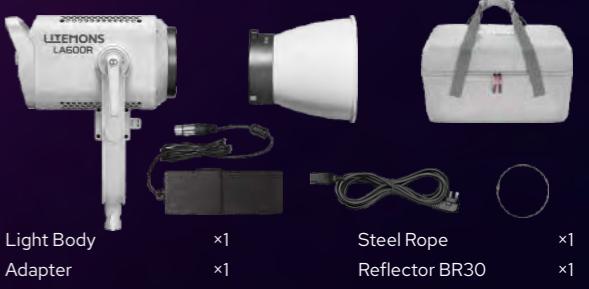

Light Body x1 Adapter x1 AC Power Cord x1 Steel Rope x1 Reflector BR30 x1 Storage Bag x1

* Tips: The black version is available for purchase, with identical specifications.

Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



To meet the demand for versatile RGB lighting in today's dynamic photography and videography landscape, LITEMONS LA150R, LA200R, LA300R, and LA300Bi stand out with a wide CCT range from 1800K to 10000K, delivering exceptional light quality for any creative scenario. Whether for indoor studios or outdoor shoots, they provide the flexibility and performance creators need.

Tech Specs

Model	LA150R	LA200R	LA300R	LA300Bi
Input Power	165W	220W	330W	330W
Power Supply	100V-240V~50/60Hz			
CCT	1800K-10000K		2800K-6500K	
GM Adjustment	-100%~100%		/	
Brightness Range	0%~100%			
CRI	Average≥95			
TLCI	Average≥94			
Bluetooth Control Distance	Max.30m			
Working Environment	-20°C-40°C			
Temperature				
Dimension (without reflector)	≈9.09"×6.14"×9.37"			
Netweight (without reflector)	≈2.5kg			

Key Features

- 94,700lux @1m with LA300R
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional LED Design Standards by High-end KNOWLED
- NFC Integration for Seamless Workflow with Godox Light App
- DC & V-mount Battery Power Supply
- 3-Light Kit Option
- Wide Compatibility with Bowens Mount



Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



Optional Kit



K1	●	Light Body	×1	AC Power Cord	×1
		Reflector BR30	×1	Wire Rope	×1
		Adapter	×1	Storage Bag	×1



K2	●	Light Body	×2	Wire Rope	×2
		Reflector Br30	×2	Softbox SB-BW6090	×2
		Adapter	×2	Light Stands	×2
		AC Power Cord	×2	Storage Bag	×1



K3	●	Light Body	×3	Wire Rope	×3
		Reflector Br30	×3	Light Stands	×3
		Adapter	×3	Storage Bag	×1
		AC Power Cord	×3		

Litemons LED Light

LA150D/LA200D/LA150Bi/LA200Bi



LA150 D

LA200 Bi

Godox has launched many successful products and wins the support and admiration of our customers. But the further we go, the more responsibility we feel like taking on to contribute to the development of the industry. Aiming at providing an accessible light solution to whoever wants to start creation, we are excited to introduce the budget-friendly Litemons LA150D/LA150Bi/LA200D/LA200Bi. With different output and daylight/bi-color versions to choose from, the LA series can meet various needs for YouTubers, live streamers, video makers, commercial producers and more.

Key Features

- Compact but powerful, with 101000 lux output at 1meter (LA200D with reflector)
- Stepless brightness adjustment from 0 to 100%
- Bi-colored LA150Bi/LA200Bi is adjustable from 2800-6500K
- High CRI/TLCI rating of 96+/97+ ensures natural and faithful colors
- Godox Light APP available
- LA150D/LA200D features 8 FX light effects, including Flash 1, Flash 2, Flash 3, Storm 1, Storm 2, Storm 3; LA150Bi/LA200Bi adds another three light effects: Candle, Fire and Firework.
- Compatible with any Bowens mount light shapers
- Built-in umbrella mount



Litemons LED Light

LA150D/LA200D/LA150Bi/LA200Bi

LA150D

CCT Distance	Testing Condition	Illuminance Unit	lm	2m	3m
5600K	bare bulb	lux	7030	1860	903
		fc	653	172	83.8
	with reflector	lux	84800	17800	7610
	fc	7880	1650	707	

LA150Bi

CCT	Testing Condition	Illuminance Unit	lm	2m	3m
2800K	bare bulb	lux	3020	806	409
		fc	281	74.8	38
		lux	3550	947	483
		fc	329	88	44.9
		lux	5030	1350	688
		fc	468	125	63.9
		lux	5080	1360	695
		fc	472	126	64.5
		lux	4400	1180	600
		fc	409	110	55.7

LA150Bi

CCT	Testing Condition	Illuminance Unit	lm	2m	3m
2800K	with reflector	lux	37700	8150	3340
		fc	3500	757	310
		lux	44800	9660	3970
		fc	4170	897	369
		lux	64900	13900	5740
		fc	6030	1290	534
		lux	66600	14400	5890
		fc	6190	1340	547
		lux	58300	12400	5150
		fc	5420	1150	479

Tech Specs

Model	LA150D	LA150Bi	LA200D	LA200Bi
Power	Max.190W	Max.190W	Max.230W	Max.230W
Input Voltage	DC 48V	DC 48V	DC 48V	DC 48V
CCT	5600K	2800-6500K	5600K	2800-6500K
Brightness Adjustment Range	0%-100%	0%-100%	0%-100%	0%-100%
CRI [≈]	96	96	96	96
TLCI [≈]	97	97	97	97
FX Mode	8	11	8	11
Controlling Method	Manual Control, Bluetooth APP Control			
Bluetooth Transmission Distance	30m	30m	30m	30m
Working Environment Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C	-10°C~40°C
Bluetooth Transmission Frequency	2402.00-2480.00MHZ	2402.00-2480.00MHZ	2402.00-2480.00MHZ	2402.00-2480.00MHZ
Maximum Transmit Power	5dbm	5dbm	5dbm	5dbm
Dimension	205*145*215mm	205*145*215mm	205*145*215mm	205*145*215mm
Net Weight [≈]	1.4kg	1.4kg	1.4kg	1.4kg

LA Series Accessories

Bowens Mount Softbox



Square Softbox
With Grid: SB-FW-6060/9090
Without Grid: SB-BW-6060/9090

Rectangular Softbox
With Grid: SB-FW-6090/70100/80120
Without Grid: SB-BW-6090/70100/80120

Strip Softbox
With Grid: SB-FW-50130/35160
Without Grid: SB-BW-50130/35160


Octagon Softbox
With Grid: SB-FW-95/120/140
Without Grid: SB-BW-95/120/140

Quick Release Umbrella Softbox



UL-BOX-30*45/45*60/60*90/90*120
UL-BOX-40/60/90
UL-BOX Octa-60/90/150
UL-BOX-30*90

Collapsible Lantern Softbox

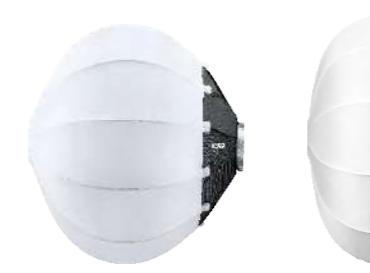

CS-50D/65D/85D

CS-50T/65T/85T

Parabolic Softbox



P90L/90H/120L/120H

Quick Release Parabolic Softbox



QR-P70/P90/P120

Quick Release Parabolic Softbox



QR-P60T/P70T/P90T/P120T/P150T

Parabolic Focusing System



P68/88/128/158 Kit

Fresnel



FLS8/FLS10

LA Series Accessories

Projection Attachment

BLP



BLP Projection Attachment

*For LA150D/LA200D/LA150Bi/LA200Bi

BP-SE



BP-SE Projection Attachment

*For LA300R/LA200R/LA150R/LA300Bi

Accessories for BLP&BP-SE



Lens 48mm



Lens 65mm



Lens 85mm



Lens 150mm



SA-11C
Color Effects Set



SA-11T
CCT Adjustment Set



MLP-CF
Gobo Holder



MLP-ID
Iris Diaphragm



BLP-CTF
Gel Frame



BLP-CTF 48mm
Gel Frame



SA-GD
Godox-mount Adapter

BP



BP19K/26K/36K
*For LA600Bi/600R/300R/
200R/150R/300Bi

Accessories for BP



19° Optical Projection Lens
(Lens 19°)



26° Optical Projection Lens
(Lens 26°)



36° Optical Projection Lens
(Lens 36°)

Accessories for Projection Attachment



Gobo Set VSA-GS1



Gobo Set VSA-GS2



Gobo Set VSA-GS3



Gobo Set VSA-GS4



SA-11C
Color Effects Set



SA-11T
CCT Adjustment Set



VSA-ID
Iris Diaphragm

Litemons LED Light Panel

LP400R/LP600R/LP1200R
LP400Bi/LP600Bi/LP1200Bi



Key Features

- Bright & Soft Lighting Results
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional Modes: CCT/RGB/HSI/GEL/FX
- Battery Power Option
- Custom-molded Carry Case for Easy Transport
- Stylish Aesthetics in a Compact Design
- 2/3-Light Kit Options
- Flexible for Every Scene
- Seamless Workflow with Godox Light App



Tech Specs

Model	LP400Bi	LP600Bi	LP1200Bi
Input Power	36W	60W	120W
Power Supply	20V=1.8A	20V=3A	20V=6A
CCT	2800-6500K		
GM Adjustment	0%-100%		
CRI	Average≥96		
TLCI	Average≥96		
FX Modes	11		
Controlling Methods	Bluetooth App/On-board		
Bluetooth Control	≥15m		
Distance			
Working Environment	-10°C-35°C		
Temperature			
Dimension	229*201*69.5mm	264*201*69.5mm	401*422*69.5mm
Netweight	855g	985g	1847g

Model	LP400R	LP600R	LP1200R
Input Power	36W	60W	120W
Power Supply	20V=1.8A	20V=3A	20V=6A
CCT	1800-10000K		
GM Adjustment	0%-100%		
CRI	Average≥96		
TLCI	Average≥96		
FX Modes	14		
Controlling Methods	Bluetooth App/On-board		
Bluetooth Control	≥15m		
Distance			
Working Environment	-10°C-35°C		
Temperature			
Dimension	229*201*69.5mm	264*201*69.5mm	401*422*69.5mm
Netweight	855g	985g	1847g

Litemons LED Light Panel

LP400R/LP600R/LP1200R
LP400Bi/LP600Bi/LP1200Bi



Optional Kit



2-light Kit

Light Body(with Yoke)	×2	Barndoors	×2
Adapter	×2	Light Stand	×2
Power Cord	×2	Carry Case	×1



3-light Kit

Light Body(with Yoke)	×3	Barndoors	×3
Adapter	×3	Light Stand	×3
Power Cord	×3	Carry Case	×1



C30Bi/C30R



The C30Bi/R is a compact, pocket-sized panel light with 2200lux brightness at 1 meter and a 5600K color temperature. Weighing only 248g, it's lightweight and portable. Featuring advanced LED beads and Godox's optical lens technology, it ensures excellent light quality. The built-in rechargeable battery offers 45 minutes of full-power runtime and supports charging while in use, making it perfect for on-the-go lighting.

Key Features

- Weighs just 248g, fits in any pocket for ultimate portability
- 30W power with advanced LED beads and optical lens
- 45 minutes of full-power use with charging via Type-C
- CCT: 2800K-6500K (C30Bi)/1800K-10000K (C30R)
- Efficient heat dissipation and low-noise fan
- Compatible with handheld, camera-mounted, or stand-mounted setups via 1/4" threaded hole



Tech Specs

Model	C30Bi
Lithium Battery	DC7.4V 3350mAh 24.8Wh
USB-C Port Input	5V=3A, 9V=3A, 12V=3A
Brightness Range	0%-100%
CCT Range	2800K-6500K
Charging Time	≈2h
Working Time	≈45min(100% brightness output) ≈276min(50% brightness output)
CRI	Average≥94
TLCI	Average≥96
Working Environment Temperature	-10°C~40°C
Bare Light Dimension	≈5.24" *3.07" *1.02"
Bare Light Net Weight	≈248g

Smartphone Lightings

LED6R/LED6Bi



LED6R

LED6R Bi

Smartphone Lightings

LED6R/LED6Bi



Three cold shoe mounts to expand for a brighter source.



Magnetic design to place on any metal surface for more creativity.



36000 Colors



Light Effects



Magnet Absorption



Use in Combination



Type-C Port

Litemons video light series is a set of entry-level tools designed to make your journey of the content creation much easier, a portable, ease-of-use and budget-friendly lighting solution to which our LED6R/LED6Bi belongs. Small but versatile, the two lights are made for different needs. For creators who'd love to play with colors and try dramatic effects, the RGBWW LED6R won't let you down. Otherwise, try LED6Bi if you only need a simple bi-color solution. Working with camera or smartphone, the Litemons series is always your best choice for vlogging, YouTube video, party lighting, selfie, portrait, product photography and more.

Key Features

- Pocket-sized and ultra-lightweight
- RGB/CCT & 3200 to 6500K Color Temperature
- 0 to 100% Brightness Dimming
- Built-In Display Panel
- Integrated 1800mAh Lithium Battery
- Magnetic Mounting
- Cold Shoe Mounting Foot & 3 x Cold Shoes
- Vertically & Horizontally Stackable

Tech Specs


Model	LED6DR	LED6Bi
Built-in Lithium Battery	1800mAh	1800mAh
Power Source of Charging	5V/2A	5V/2A
Power	Max. 6W	Max. 6W
Color Temperature Range	3200K~6500K	3200K~6500K (in 9 levels)
100% Illuminance(LUX)(0.5m)(s)	270	360
CRI(%)	95	95
Brightness Range	0%~100%	in 10 levels
Duration	2H-10H	1.5H-10H
Working Environment Temperature	-10~40°C	-10~40°C
Dimension	77*66*30mm	77*66*30mm
Net Weight	110g	110g

* RGB mode, FX mode, magnetic design (only for LED 6R)

GODOX CONTROL



APP Control

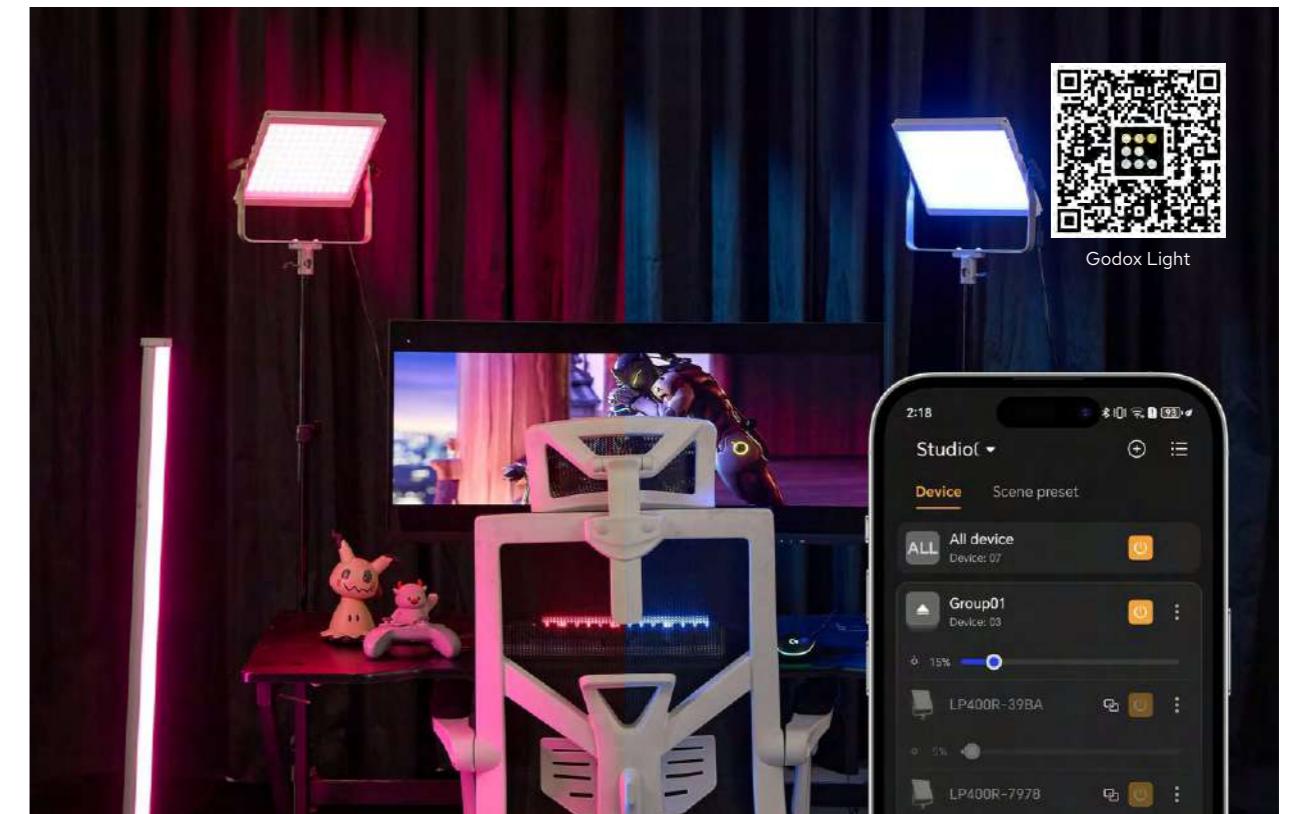

Flexible Setting. Easier Shooting

Experience flexible settings and easier shooting with the all-new Godox Light App 4.0. Revolutionize your workflow with instant NFC pairing, a fluid interface, and intuitive dual-mode control. Packed with professional color tools and a collaborative ecosystem, it is the ultimate companion for every lighting creator.

Key Features

- User-friendly UI designed for efficiency.
- Features NFC and Bluetooth addition.
- Dual Modes: List & Studio.
- Infinite Colors and Effects including CCT, HSI, RGB, X/Y, and GELs.
- In-App Video Guides.
- Simpler Sharing & Remote Control.

Remote Control



RC-R9II



RC-A6II



RC-A5II



TimoLink RX

TimoLink TX

Built with CRMX modules from Lumenradio, TimoLink TX and TimoLink RX are wireless DMX transmitters and receivers compatible with Godox or other fixtures featuring DMX control capabilities.

The transmitter TimoLink TX converts a wired DMX console to wireless by sending signals to CRMX-compatible fixtures or receivers. As for the receiver TimoLink RX, it works perfectly with DMX-compatible fixtures that do not include wireless modules (such as LA600R/Bi) and enables them to achieve wireless DMX control. TimoLink TX and TimoLink RX are ideal for filmmaking, broadcasting and other scenes where wireless DMX is needed.

Key Features

- Automatic frequency hopping ensures stable signals within 300m.
- 270° rotatable connectors for wider compatibility with different interface designs.
- Separately designed SET button and RESET button simplify operation logic and enhance efficiency.
- The TEST feature for TimoLink TX can help check the connection status of lights even off the DMX board.



Optional Purchase



TL-C120
RJ45 to 5-Pin XLR Conversion Cable

RJ45 Ethernet to 5 Pin XLR Conversion Cable allows you to run standard 5 Pin DMX cable to the Godox lights or any light fixture with RJ45 DMX input connectors.

Tech Specs

Name	Wireless DMX Transmitter	Wireless DMX Receiver
Model	TimoLink TX	TimoLink RX
Input Parameter	5V=280mA	5V=90mA
Colors of Signal Indicator	8	8
Power Supply Port	Type-C	Type-C
Compatible Models	DMX512 Controller/DMX240 Controller (incompatible with New Sunny 512 Controller)	Fixtures with DMX functions
DMX Plug Rotatable Angle	270°	270°
Controlling Distance	Max. 300m (in an open and barrier-free environment)	Max. 300m (in an open and barrier-free environment)
Working Environment Temperature	-20~45°C	-20~45°C
Dimension	141*96*26mm	110*53*26mm
Net Weight	89g	80g



LENS & GOBOS

Fresnel Lens System

FLS5/FLS8/FLS10



Godox offers a complete Fresnel system, allowing all Godox COB lights to easily enhance their intensity with a compatible Fresnel lens, regardless of their mount. Built with class-leading technology to intensify the LED light, the Fresnel lenses empower your lights to deliver an even brighter beam and render consistent luminescence with smooth intensity.

Key Features

- Intensify the Output
The Godox Fresnel Lenses can multiply the output of Godox LED lights.
- Variable Beam Angle
Beam thrown by the Fresnel Lenses can be adjusted from a spot angle to a flood one.
FLS5: 10°~35°/FLS8: 10°~40°/FLS10: 10°~35°
- Robust Construction
The ergonomic and sturdy build of the Godox Fresnel Lenses ensures minimized light leaks and rugged durability.
- Compatible with Barndoors
Compatible with the Godox 8-leaf barndoors to precisely cut and shape the light for more creative expressions.

Fresnel Lens System

FLS5/FLS8/FLS10



FLS5+LB-03

FLS5 is compatible with Godox LED lights which adopt Godox Mount, such as ML60, ML60Bi, ML30, ML30Bi.



FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

*M600D and M600Bi are incompatible owing to their particular rings.

Tech Specs

Model	FLS5	FLS8	FLS10
Adjustable Beam Angle	10°~35°	10°~40°	10°~35°
Working Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	147*147*61mm	246*246*121mm	295*295*135mm
Weight	0.42kg	2kg	3kg

Projection Attachment

ML-SP



Key Features

- Godox Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount

Tech Specs

Model	Dimension≈	Net Weight≈
Projection attachment ML-SP	134*134*129mm	697g
Lens 19°	107*65*65mm	427g
Lens 36°	64*65*65mm	255g
Lens 50°	93*65*65mm	392g

Optional Purchase



Projection Attachment

BP-SE



Key Features

- Unique Design for Flat Bowens Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount

Tech Specs

Model	Dimension	Net Weight
Projection tube (excluding lens)	220*220*118mm	≈1.3kg
65mm Lens	80*80*83mm	≈0.5kg
85mm Lens	80*80*89mm	≈0.5kg
150mm Lens	80*80*129mm	≈0.7kg

Optional Purchase



Projection Attachment

BLP




Meet the BLP, where creativity merges with playfulness. 360° rotatable design allows for effortless adjustment of projection patterns. And with superior heat management, expansive lens options, and endless creative accessories, the BLP serves as a perfect tool for artists and creators. Beyond just lighting, the BLP is a catalyst for artistic brilliance.



The lens barrel can be rotated 360°

Key Features


- 360° Rotatable Design
- Expertly Crafted Lenses for Clear & Sharp Visuals
- Superior Heat Management
- Expansive Lens Options(48mm, 65mm, 85mm, and 150mm)
- Versatile EF-Mount
- Bowens Mount for Wide Compatibility
- Abundant Creative Accessories

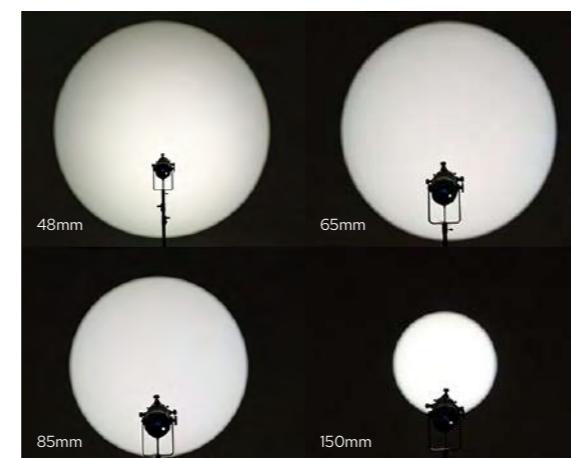

Enrich lens ecology

Projection Attachment

BLP

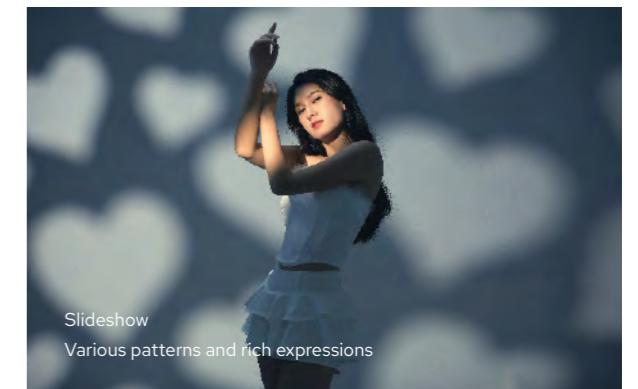

Optional Purchase




Tech Specs

Projection Attachment	Dimension	Net Weight
(excluding lens)	220*220*166mm	≈1.3kg
48mm Lens	104*104*160mm	≈1.2kg
65mm Lens	80*80*72mm	≈0.5kg
85mm Lens	80*80*88mm	≈0.5kg
150mm Lens	80*80*129mm	≈0.7kg

illuminance Data

Distance	Illumination unit	Bare lamp M300Bi	65mm	85mm	150mm
3m	lux	≈1570	≈1170	≈1930	≈4890
	fc	≈146	≈109	≈179	≈454
4m	lux	≈825	≈655	≈1090	≈2730
	fc	≈76.6	≈60.8	≈101	≈254
5m	lux	≈531	≈420	≈692	≈1710
	fc	≈49.4	≈39	≈64.3	≈159

ACCESSORIES

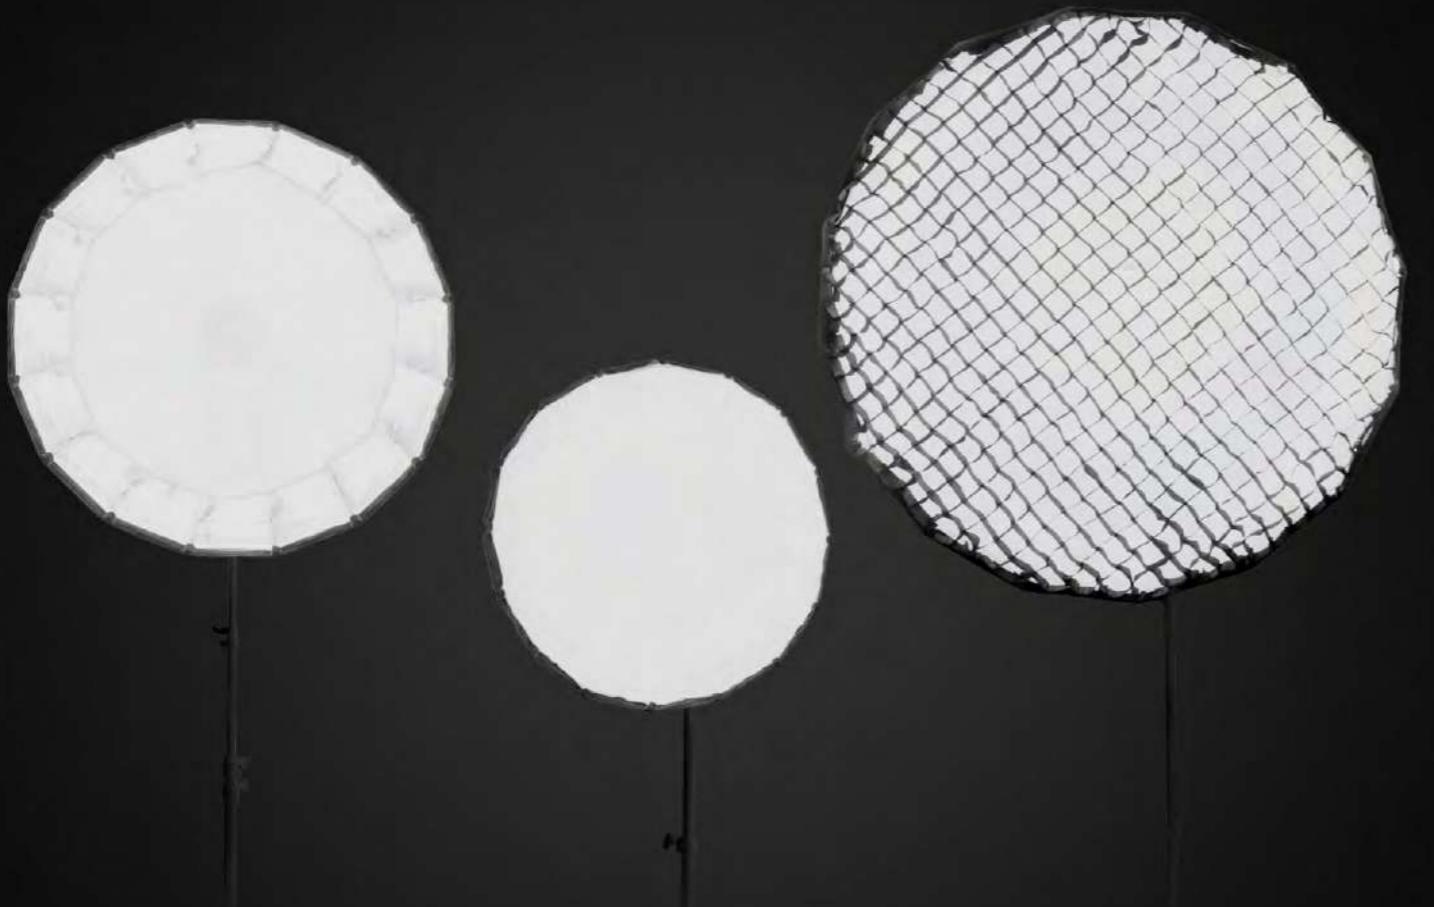

Projection Attachment


SA-17



SA-17


Godox SA-17 Adapter for Bowens-mount LED lights to Projection Attachment, with its solid construction, allows you to use Godox SA-P Projection attachment with any of your Bowens-mount LED Lights for achieving a greater degree of control with your light.

Extending the SA-P Projection Attachment's Compatibility
The adapter allows COB Bowens-mount LED lights users to release their boundless creativity by matching with SA-P projection attachment to achieve their desired effects. For users who already own S30 focusing light, now they can go beyond S30 and use the adapter to serve for a broader range of Bowens-mount LED lights. Equipped with built-in optical lens, the adapter provides excellent optical performance, assuring light output that's even from edge to edge.

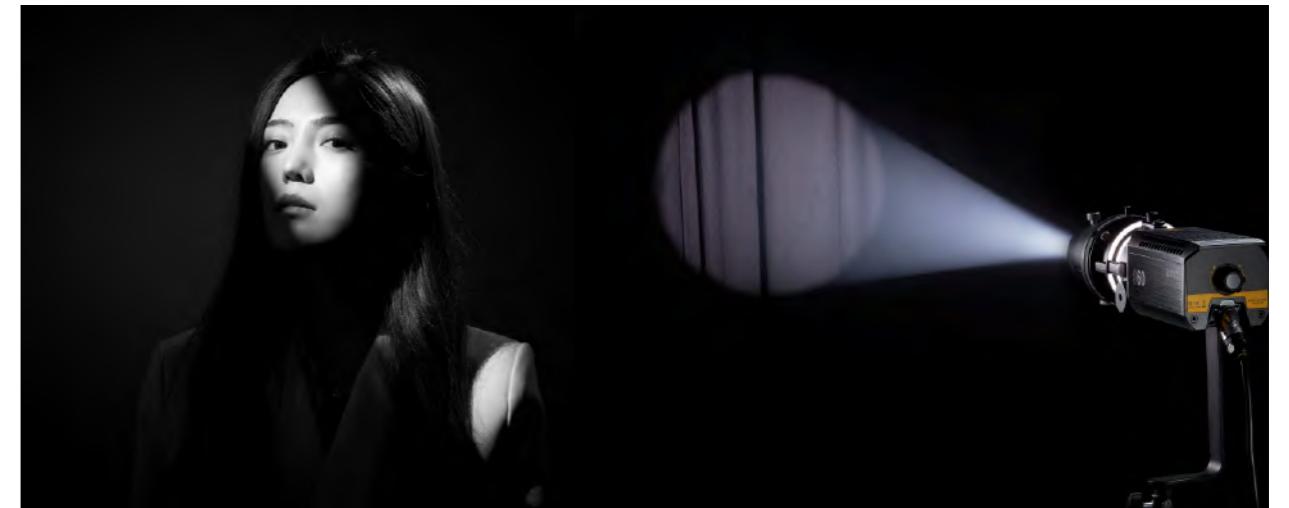

Parabolic Softbox | Quick Release Bowens Mount

QR-P60T/P70T/
P90T/P120T/P150T

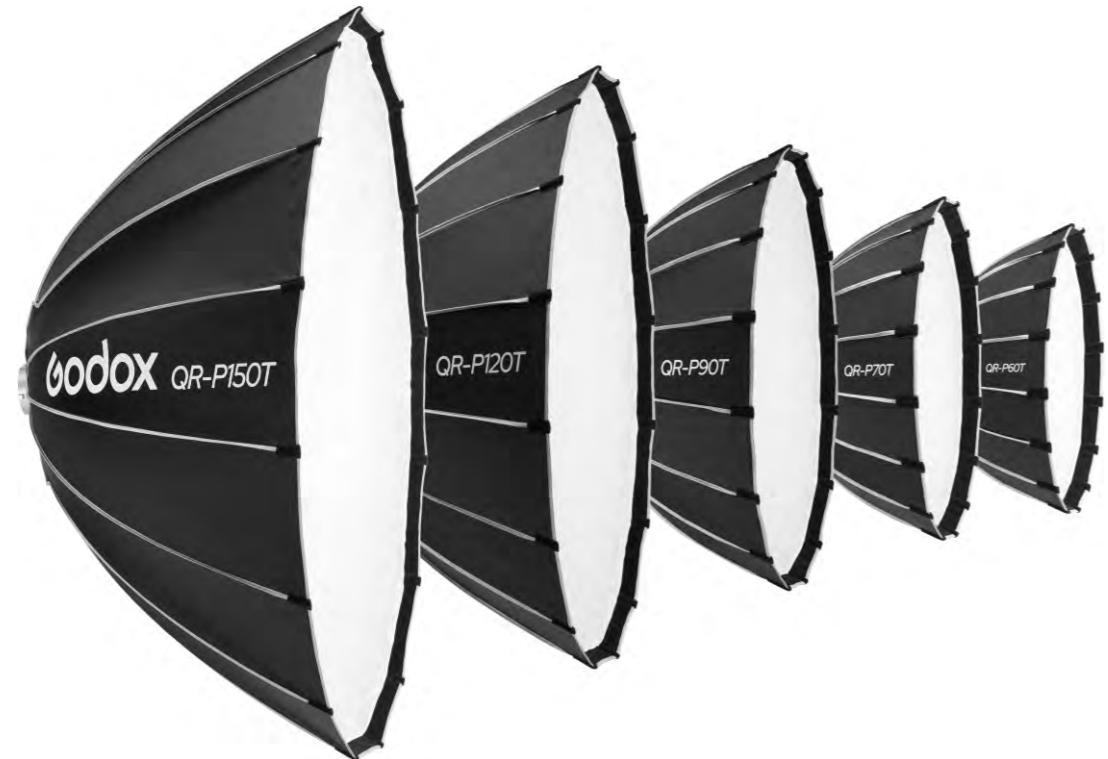

QR-P150T QR-P120T QR-P90T QR-P70T QR-P60T

QR-P series boasts a more compact design in comparison to its predecessors within the same series. Crafted as a softbox tailored for small-space live streaming and video production, its quick-release system simplifies setup and breakdown. The internal diffuser design, tightly connected with Velcro, ensures perfect diffusing result. Available in five diameters (2', 2.3', 3', 4', and 5'), it proves to be the ideal companion for on-site and small-space shooting.

Key Features

- Compact & space-saving
- Quick-mount design enables easy setup and dismantling
- Double-layered soft light cloth for dual soft light effects
- Optional grids for precise light control
- Grid models: QR-P60T-G, QR-P70T-G, QR-P90T-G, QR-P120T-G, QR-P150T-G
- Bowens mount, compatible with optional mounting plates for versatility



Conventional

QR-P series Softbox

Parabolic Softbox Quick Release Bowens Mount

QR-P60T/P70T/
P90T/P120T/P150T



The inner diffuser is closely attached to the softbox with Velcro, ensuring perfect diffusing result.

Bowens-Mount Capability

SA-GD(optional)
Speed Ring for Godox



SA-PF(optional)
Speed Ring for Profoto



SA-BR(optional)
Speed Ring for Broncolor



Tech Specs



QR-P60T/P70T/P90T/P120T/P150T

Softbox x1 Inner Fabric Diffuser x1
Front Fabric Diffusers x1 Carring Bag x1

Model	Net Weight	Dimension(Depth x Diameter)
QR-P60T	0.77kg	29.8*60cm
QR-P70T	0.830kg	34.1*70cm
QR-P90T	1.359kg	42.7*90cm
QR-P120T	1.781kg	56.7*120cm
QR-P150T	2.386kg	70.2*150cm

Softbox | Collapsible Lantern Bowens Mount

CS-50T/CS-65T/CS-85T



CS-50T


CS-65T

CS-85T

CS-50T/CS-65T/CS-85T, the ideal soft lighting source for small spaces. With heights ranging from 1.1' to 1.8' when fully expanded, the CS-T series Softbox with a shallower depth offer exceptional versatility in compact settings, emitting soft and uniform lighting in all directions. They are perfect for live streaming and video recordings.

Key Features

- Standing at heights of just 1.1', 1.4', and 1.8'
- Quick-mount design for effortless installation with a single press
- 270-degree beam angle for soft, uniform lighting
- Detachable skirt for precise light control
- Universal Bowens mount, compatible with various lights
- Optional interchangeable mounting plates: SA-PF/SA-BR/SA-GD

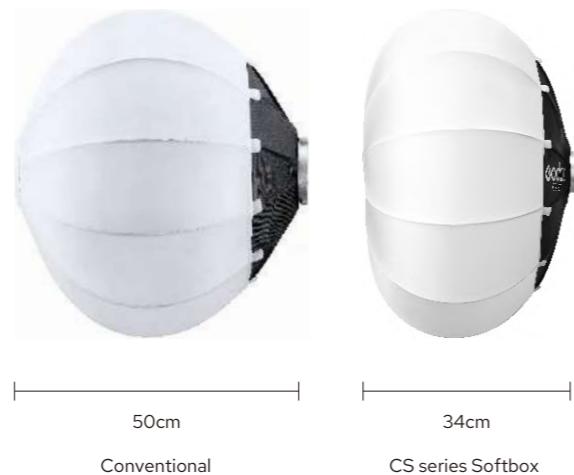

Softbox Collapsible Lantern Bowens Mount

CS-50T/CS-65T/CS-85T



The diffuser is securely fastened to the frame with Velcro tape, keeping the umbrella ribs in place, enabling the Softbox to expand and collapse in just one second, greatly enhancing workflow efficiency.



Achieve precise light control with the detachable skirt, easily attachable to the Lantern, allowing you to eliminate unwanted bouncing light by rolling it up or down.




CS-50T/CS-65T/CS-85T

Softbox x1

Carring Bag x1

Tech Specs

Model	Net Weight	Dimension(Depth x Diameter)
CS-50T	0.869kg	33.5*50cm
CS-65T	0.129kg	41.8*65cm
CS-80T	1.400kg	54.1*85cm

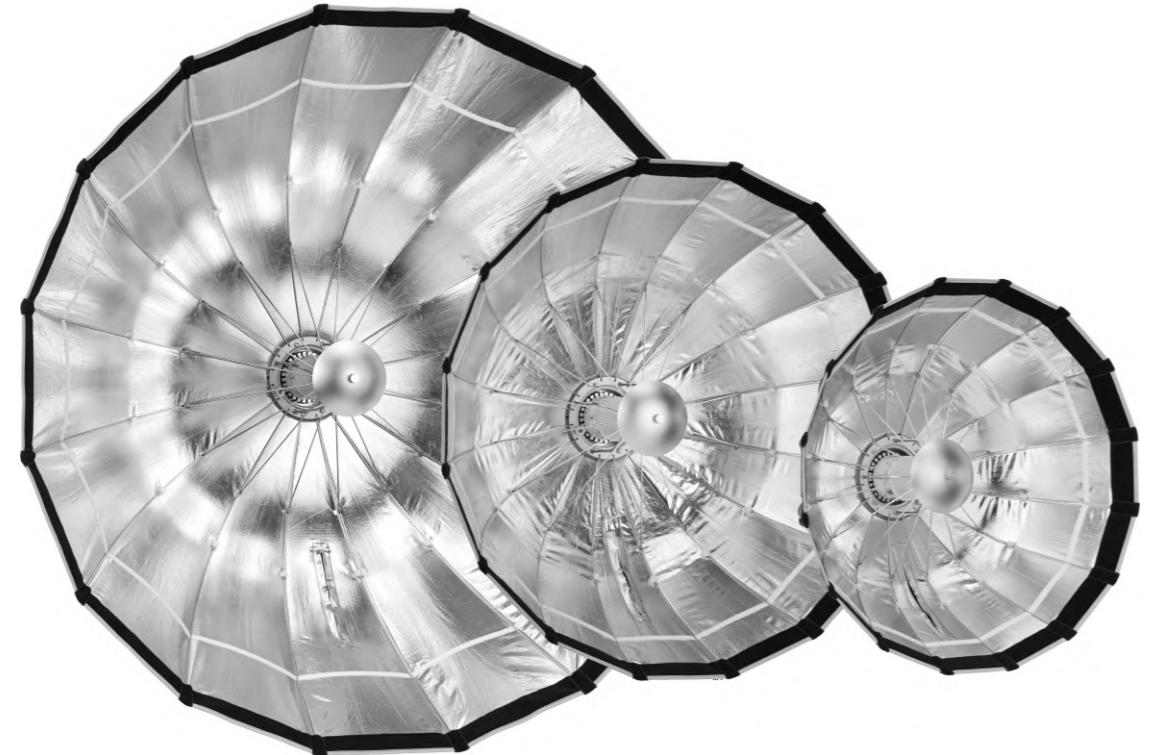

S120T

S85T

S65T

Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown. Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation. Available in 3 different sizes, the Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown. Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation. Available in 3 different sizes, the lightweight quick-release softbox is your ideal choice for home, studio, and travel.

Key Features

- Quick Release Mechanism
- Crafted with shadow design(11.8inch depth)
- Lightweight Beauty Dish
- Versatile Compatibility
- Compact and portable



Designed for shooting on-the-go, it is foldable and highly portable, ideal for location, ensuring convenience wherever you are.



With the deflector plate (optional) and the silver interior, you can have a soft look but with an edge of crispness, just like the lighting effects achieved by a beauty dish, but a more lightweight one.



S65T/85T/120T

Softbox	x1	Inner Diffuser	x1
Carring Bag	x1	Front Diffuser	x1

Optional

Grid	Deflector Plate	Speed Ring
S65T-G	S65T-P	SA-GD for Godox
S85T-G	S85T-P	SA-BR for Broncolor
SI20T-G	SI20T-P	SA-PF for Profoto

Tech Specs

Model	S65T	S85T	S120T
Diameter Open	65cm	85cm	120cm
Depth Open	30cm	38cm	49cm
Collapsed Softbox Length	42cm	56cm	78cm
Net Weight	0.85kg	1.016kg	1.424kg

Softbox|Godox Mount

AD-S60/65/85



AD-S60S

Compatible with AD300Pro/ML60/ML60Bi, comes with grids. Godox AD-S60S is a dedicated softbox with silver interior finish and parabolic reflecting shape to deliver indirect lighting and create distinct contrasts. The softbox has native Godox mount to snap onto the AD300Pro or ML60/ML60Bi in no time, comes with two levels of diffusion to create degrees of increased softness, includes grids for extra beam directing, and has zippered slot for cables and cord placement on the side.



The Godox mount softboxes comes with a grid that eliminates spill light and provides the directional control that facilitates selective lighting.

AD-S65S/AD-S65W

Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids. The parabolic softbox has two model AD-S65S with silver lining and AD-S65W with white lining. AD-S65 softbox adopts parabolic box design to offer soft and even light effects for shooting. The shape of the softbox allows the user to control precisely where the light falls and soften the light stream and is built on the basis of a quick folding mechanism.



If you want a cool-toned look with snappy contrast, attach the silver reflector inside the umbrella. If you want a soft, warm rendition attach the gold reflector. The removable front diffuser makes it easy.

AD-S85S/AD-S85W

Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids. With deep design to output soft light with a sharp falloff, Godox AD-S85 makes feathering and edge-lighting simple. The included fabric grid thwarts spill light and offers directional control necessary for selective lighting. Its quick-folding mechanism allows you to set up and break down quickly.



Softbox|Collapsible Lantern Bowens Mount

CS-85D/CS-65D



CS-85D/CS-65D

Godox Collapsible Lantern Softbox CS-85D/CS-65D is perfect for use overhead or to raise the ambient illumination level. With a 270 degree beam angle, the light is ideal for video recording, live streaming, film making, and still life photography.

Key Features

- Extremely Fast Setup
- Stunning, Soft, Omni-Directional Light
- Bowens Mount Compatibility
- Optional skirts for beam spread control



Thanks to its simple and durable design, this softbox is a breeze to use. The lantern can be popped open or closed in mere seconds.

Purchase skirt for achieving better light control Skirt Set for Lantern Softbox (Available for Purchase)SS-65 for CS-65D/SS-85 for CS-85D






P90L/P90H

Godox Parabolic Softboxes are the essential modifier for commercial, fashion, and portrait photographers. There are two version for choice, P90L for Light Version and P90H for High Temperature Resistant Version. P90L/P90H series adopt deep parabolic box design, which enables light to be sent out straightly and brightness, offering even, soft, and high saturation light effects for shooting with easy installation, great portability. P90L/P90H comes with removable one-stop outer and inner diffusers to achieve different levels of contrast. A carry bag is included for storage and transport.

P120L/P120H

Godox P120L/P120H softbox is useful for stunning fashion and portraiture images. Same as P90L/P90H, the P120 softbox also has two version. P120L/P120H is a 16-sided light-shaper offering focused, soft output with a punchy, crisp edge that lends dimension and detail to your subject as well as natural-looking catchlights in their eyes. The parabolic design yields soft, focused light with a crisp edge. With removable outer and inner diffusers, it can achieve desired contrast. A carry bag is included for storage and transport.

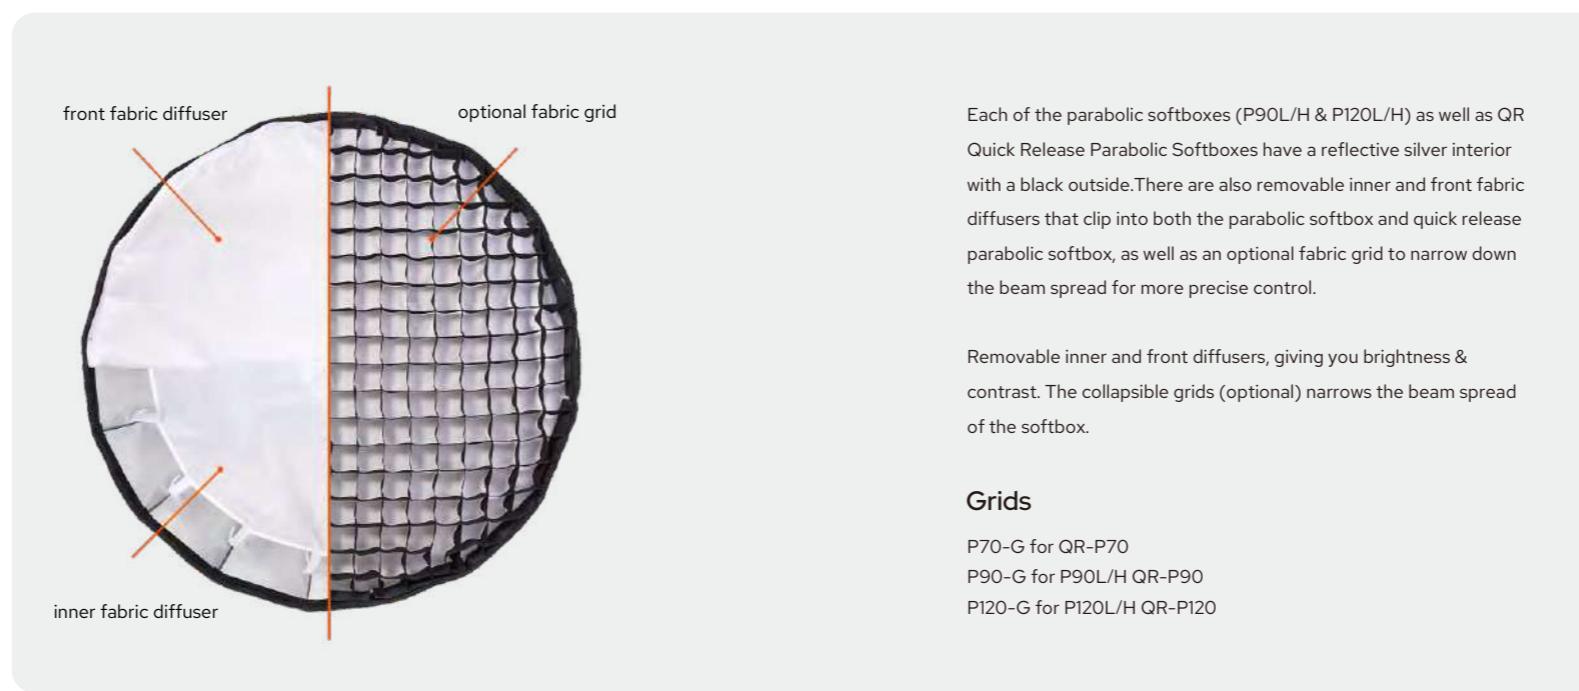

QR-P70/P90/P120

The Godox quick release parabolic softbox adopts an impressive quick release system for rapid setup and breakdown. Highly versatile and compatible, it provides you reliable light quality and various creative expressions. Available in three different sizes, this fast and easy to use softbox is deal companion for your indoor and on location shootings.

Key Features

- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible

Parabolic Softbox | Quick Release Bowens Mount

QR-P70/P90/P120

Compatible with any flash head or monolight that uses the popular Bowens accessory mount; The softbox can also mount with Godox mount and Profoto mount accessory via attaching the SA-GD Godox mount adapter (optional) and SA-PF2 Profoto mount adapter (optional). And speed ring SA-BR2 is for adapting Broncolor lights.




As it folds down into an easy carry bag, it's extremely portable and therefore ideal to use on location.



Effortless Softbox Setup

The easiest way to put the softbox up is to click two rods on opposite sides up at the same time. Once they're all clicked into place, you simply Velcro the top panels of the softbox together to prevent light leakage.

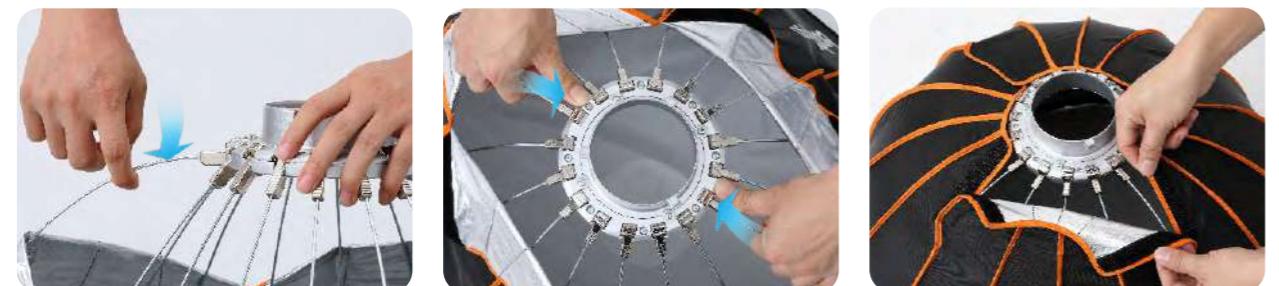

To take the softbox down again, you simply lift the rod slightly whilst pressing down the button above it.

In this way, you can have the softbox assembled in mere minutes.



Softbox | Bowens Mount

Godox offers softboxes with Bowens mounting, which fits most of Godox flash heads or other brands with the widely used Bowens front accessory mount. Ideal for all types of photo work, Godox softboxes render a soft, flattering quality of light with manageable contrast. There are SB-FW Series, SB-USW Series, and SB-GUE Series, which include grids to offer directional control of the output, keeping light off the background, and allowing you to light specific areas of your subject.



Square Softbox

Model: SB-BW-6060/9090
Sizes (W×H): 60x60cm, 90x90cm

Rectangular Softbox

Model: SB-BW-6090/70100/80120
Sizes (W×H): 60x60cm, 70x100cm, 80x120cm

Strip Softbox

Model: SB-BW-50130/35160
Sizes (W×H): 50x130cm, 35x160cm

Octagon Softbox

Model: SB-BW-95/120/140
Sizes: 95cm, 120cm, 140cm



Square Softbox with Grid

Model: SB-FW-6060/9090
Sizes (W×H): 60x60cm, 90x90cm

Rectangular Softbox with Grid


Model: SB-FW-6090/70100/80120
Sizes (W×H): 60x60cm, 70x100cm, 80x120cm

Strip Softbox with Grid

Model: SB-FW-50130/35160
Sizes (W×H): 50x130cm, 35x160cm

Octagon Softbox with Grid

Model: SB-FW-95/120/140
Sizes: φ95cm, φ120cm, φ140cm

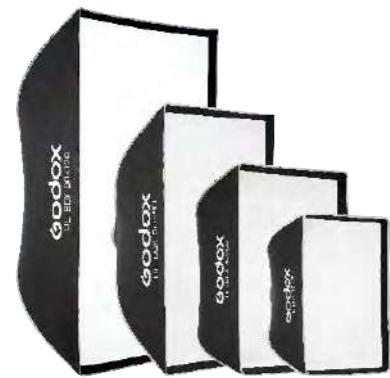

UL-BOX-30*45/45*60/60*90/90*120



UL-BOX-40/60/90



UL-BOX Octa-60/90/150



UL-BOX-30*90

The Godox UL-Series Quick Release Umbrella Softbox is designed for versatility and precision. With a variety of shapes, sizes, and compatibility options, it provides a flexible toolkit for effortlessly creating impactful portraits, product shots, and still-life imagery.

Key Features

- Variety of Sizes: Octagonal, strip, rectangular, and square options (30cm to 180cm).
- Quick Set-Up: Opens and closes like an umbrella.
- Light Shaping: Optional diffuser and edge mask for customized lighting.
- Portable: Lightweight and collapsible for easy transport.
- Wide Compatibility: Bowens mount, compatible with strobes and continuous lights.



Sample Softbox: UL-BOX Octa-60
(other sizes/shapes available).

**UL-KIT-PRO Softbox Pro Kit
with Diffuser & Grid**



Softbox x1 Inner White x1 Grid x1
Carry Bag x1 Outer White x1 Diffuser Plate x1

Tech Specs

Model	Net Weight	Diameter Open	Depth Open	Folded Length
UL-BOX Octa-60	800g	60cm	39cm	49cm
UL-BOX Octa-90	1100g	90cm	57cm	83cm
UL-BOX Octa-150	1750g	150cm	55cm	92cm
UL-BOX-40	650g	40cm	33.5cm	43cm
UL-BOX-60	850g	60cm	38cm	55cm
UL-BOX-90	1150g	90cm	38cm	57cm
UL-BOX-30*45	700g	30/45cm	33.5cm	42cm
UL-BOX-45*60	800g	45/60cm	38cm	53.5cm
UL-BOX-60*90	1000g	60/90cm	49.5cm	71cm
UL-BOX-90*120	1550g	90/120cm	50cm	90cm
UL-BOX-30*90	800g	30/90cm	42cm	63cm

Optional

Edge Mask	Speed Ring
UL-EM-120	SA-GD
UL-EM-150	SA-BR2
UL-EM-180	SA-PF2
UL-EM-60*180	
UL-EM-90*120	Diffuser Plate
UL-EM-120*180	UL-DP-RU
Grid	Inner/OuterWhiteKit
UL-G-60	UL-IW&OW-O60
UL-G-90	UL-IW&OW-O90
UL-G-120	UL-IW&OW-O120
UL-G-150	UL-IW&OW-O150
UL-G-30*90	UL-IW&OW-O180
UL-G-30*120	UL-IW&OW-30*90
UL-G-60*180	UL-IW&OW-30*120
UL-G-30*45	UL-IW&OW-30*45
UL-G-45*60	UL-IW&OW-45*60
UL-G-60*90	UL-IW&OW-60*90
UL-G-90*120	UL-IW&OW-90*120
UL-G-40*40	UL-IW&OW-40*40
UL-G-60*60	UL-IW&OW-120*180
UL-G-90*90	UL-IW&OW-60*60
UL-G-90*90	UL-IW&OW-90*90

Lighting Stands & Mounting

90F

Foldable Floor Light Stand

60cm	48cm	87cm	55cm	1.2kg
3kg	25x5mm	22.4/19mm		

190F

Adjustable Legs Light Stand

86/146cm	49cm	188cm	72cm	1.25kg
3kg	19x16mm	29.1/25.7/22.4/19/16mm		

210F

Light Stand

100cm	51cm	213cm	65cm	1.4kg
2kg	29.1/25.7/22.4/19/16mm			



240F

Light Stand

92cm	68cm	240cm	80cm	1.3kg
2kg	19mm	25.7/22.4/19/16mm		

300F

Light Stand

108cm	86cm	300cm	90cm	1.7kg
3kg	22mm	29.1/25.7/22.4/19/16mm		



Lighting Stands & Mounting

290F

Heavy Duty Light Stand

110cm	110cm	286cm	130cm	2.2kg
5kg	22mm	35/30/25mm		



380F

Heavy Duty Light Stand

110cm	110cm	380cm	145cm	2kg
5kg	22mm	35/30/25mm		



240CS

C-Stand with Arm (Silver)

95cm	130cm	237cm	158cm	6kg
10kg	25mm	35/30/25mm		



270CS

C-Stand with Arm (Silver)

95cm	140cm	270cm	168cm	6.3kg
10kg	25mm	35/30/25mm		



240FS

Wheeled Light Stand

110cm	120cm	240cm	35cm	6.3kg
10kg	35mm			



LA-300

Light Stand

	100cm	88.5cm	300cm	88cm	1.86kg
	3kg	22mm	35/25mm		



LA-302

Light Stand

	70cm	70cm	190cm	66cm	0.65kg
	5kg	16mm	22/16mm		



LA-303

Light Stand

	112cm	97cm	260cm	97cm	1.5kg
	6kg	22mm	31.5/25.7mm		



SA5015

Heavy Duty Steel Roller Stand

	168cm	92cm	10.4kg	40kg
--	-------	------	--------	------



Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 92cm to 168cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.

LA-304

Light Stand

	80cm	73cm	200cm	70cm	1.037kg
	5kg	19mm	25/22/19mm		



BS-04

Retractable Background Stand with Carrying Bag

	97cm	260cm	3	300cm
--	------	-------	---	-------



SA5045

Heavy Duty Steel Roller Stand

	450cm	146cm	16.2kg	40kg
--	-------	-------	--------	------



Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 146cm to 450cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.

Lighting Stands & Mounting

CB Series

FH01

Light Boom Holder



Designed for mounting a boom arm to a heavy-duty stand. It makes tilt and swivel adjustments of the boom arm quick and simple.

FH02

Lighting Holder



The FH02 Lighting Holder is designed to accept an umbrella and light or two lights for easy attachment to a standard light stand.

FH03

Reflector Boom Holder



The FH03 Reflector Boom Holder allows you to attach up to two RMA-01 reflector mounting arms onto a light boom.

LSA-14

Boom Extension Arm



Easily extended, good stability, high load capacity.

LSA-15

Boom Extension Arm



This boom arm with clamp features aluminum construction and is telescopically adjustable between 27.5 and 67" in length.

LSA-16

Boom Arm with Reflector Holder



The boom arm has a large handle that allows angle adjustments and locks it in place by friction.

RMA-01

Reflector Mounting Arm



Reflector Mounting Arm can hold a wide variety of reflectors with its plastic clips. The arm mounts to a light stand via its mini grip head which allows it to be turned to obtain the required angle for the desired degree of reflectors.

Carrying Bag

LS-01

Multi-function Clamp



Multi-function Clamp can be installed on the light stand to attach small studio accessories or hang objects.

LS-02

Multi-function Clamp



LSA-19 clamp is compact accessory that allows you to attach with V-mount accessories such as V-mount batteries. Use it with Godox LSA-03 nano clamp you can mount them to a light stand or tripod easily.

LSA-03/LSA-19

Nano Clamp/Clamp



LSA-06

Wheel for Light Stand



LSA-07

Wheel for Light Stand



Step-On lock design locks the wheel from rolling

LSA-08

Flexible Arm



Flexible and strong enough to hold Shoe-Mount strobes at all angles to reduce unwanted reflections

LSA-09

Heavy Duty Flexible Arm



The two arms can be freely adjusted and locked by the knob

LSA-04

Magic Arm



LSA-05

Extension Arm



The extension arm is designed for attaching to a Convi clamp for hanging a light or a camera from a light stand or pole

LSA-13

Sky Hook



For hanging accessories

LSA-11

Laptop Tray



An aluminum platform to hold your laptop on a camera stand. Especially held on the laptop tray LSA-12, the cables of the laptop can be fixed on all edges of the holder with cable ties, thus preventing them being pulled out.

LSA-10

Dual Mount Arm



The dual mount arm features four separate mounting points-two heads on the sides of the arm and two heads on a 90°perpendicular angle



Carrying Bags

CB Series



CB-32

Dimensions: 46.5*22.5*35cm
Recommended placing items: ML30-K2/ML30Bi-K2



CB-33

Dimensions: 55*24*39cm
Recommended placing items: ML-Kit1/ML-Kit2



CB-23

Dimensions: 37.7*17*8.5cm
Recommended placing items: TL30-K2



CB-39

Dimensions: 77.5*22.5*7.5cm
Recommended placing items: TL60-K2



CB-22

Dimensions: 37.7*26.7*8.5cm
Recommended placing items: TL30-K4



CB-40

Dimensions: 78*36.5*8cm
Recommended placing items: TL60-K4

Carrying Bags

CB Series



CB-05

Dimensions: 74*26*27cm
Recommended placing items: SL60W Two Light Kit



CB-08

Dimensions: 52*30*39.5cm
Recommended placing items:
LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-14

Dimensions: 52*15*15cm
Recommended placing items: S30-D light stand



CB-52

Dimensions: 53*16*16cm
Recommended placing items: S60Bi Light stand



CB-04

Dimensions: 78*24*24cm
Recommended placing items: SL100D-K2/SL100Bi-K2

Carrying Bags

CB Series



CB-08

Dimensions: 52*30*39.5cm

Recommended placing items:

LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-49

Dimensions: 55*26*39cm

Recommended placing items: M300D

Carrying Bags

CB Series



CB-51

Dimensions: 38.5*27*64cm

Recommended placing items: S60Bi-K3



CB-64

Dimensions: 57*29.5*24cm

Recommended placing items: VL300II



CB-34

Dimensions: 136*29.5*61cm

Recommended placing items: M600D



CB-37

Dimensions: 57.5*30.5*28cm

Recommended placing items: VSA-19K/VSA-26K/VSA-36K



CB-63

Dimensions: 51*29.5*24cm

Recommended placing items: VL200II



CB-62

Dimensions: 51*29.5*24cm

Recommended placing items: VL150II



CB-47

Dimensions: 125.2cm*29.3cm*12.9cm

Recommended placing items: TL120-K4



CB-65

Dimensions: 36*29.5*64cm

Recommended placing items: M600Bi



CB-66

Dimensions: 69*26.5*29cm

Recommended placing items: FL100-K2/FL150S-K2 kit