

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4,
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

TEL: +86-(0)755-25701197,25726373

FAX: +86-(0)755-25723423

Email: godox@godox.com


www.godox.com




Known Global



Known Global




known_global



Known Global

Godox

KNOWLED CINEMATIC LIGHTING ECOSYSTEM

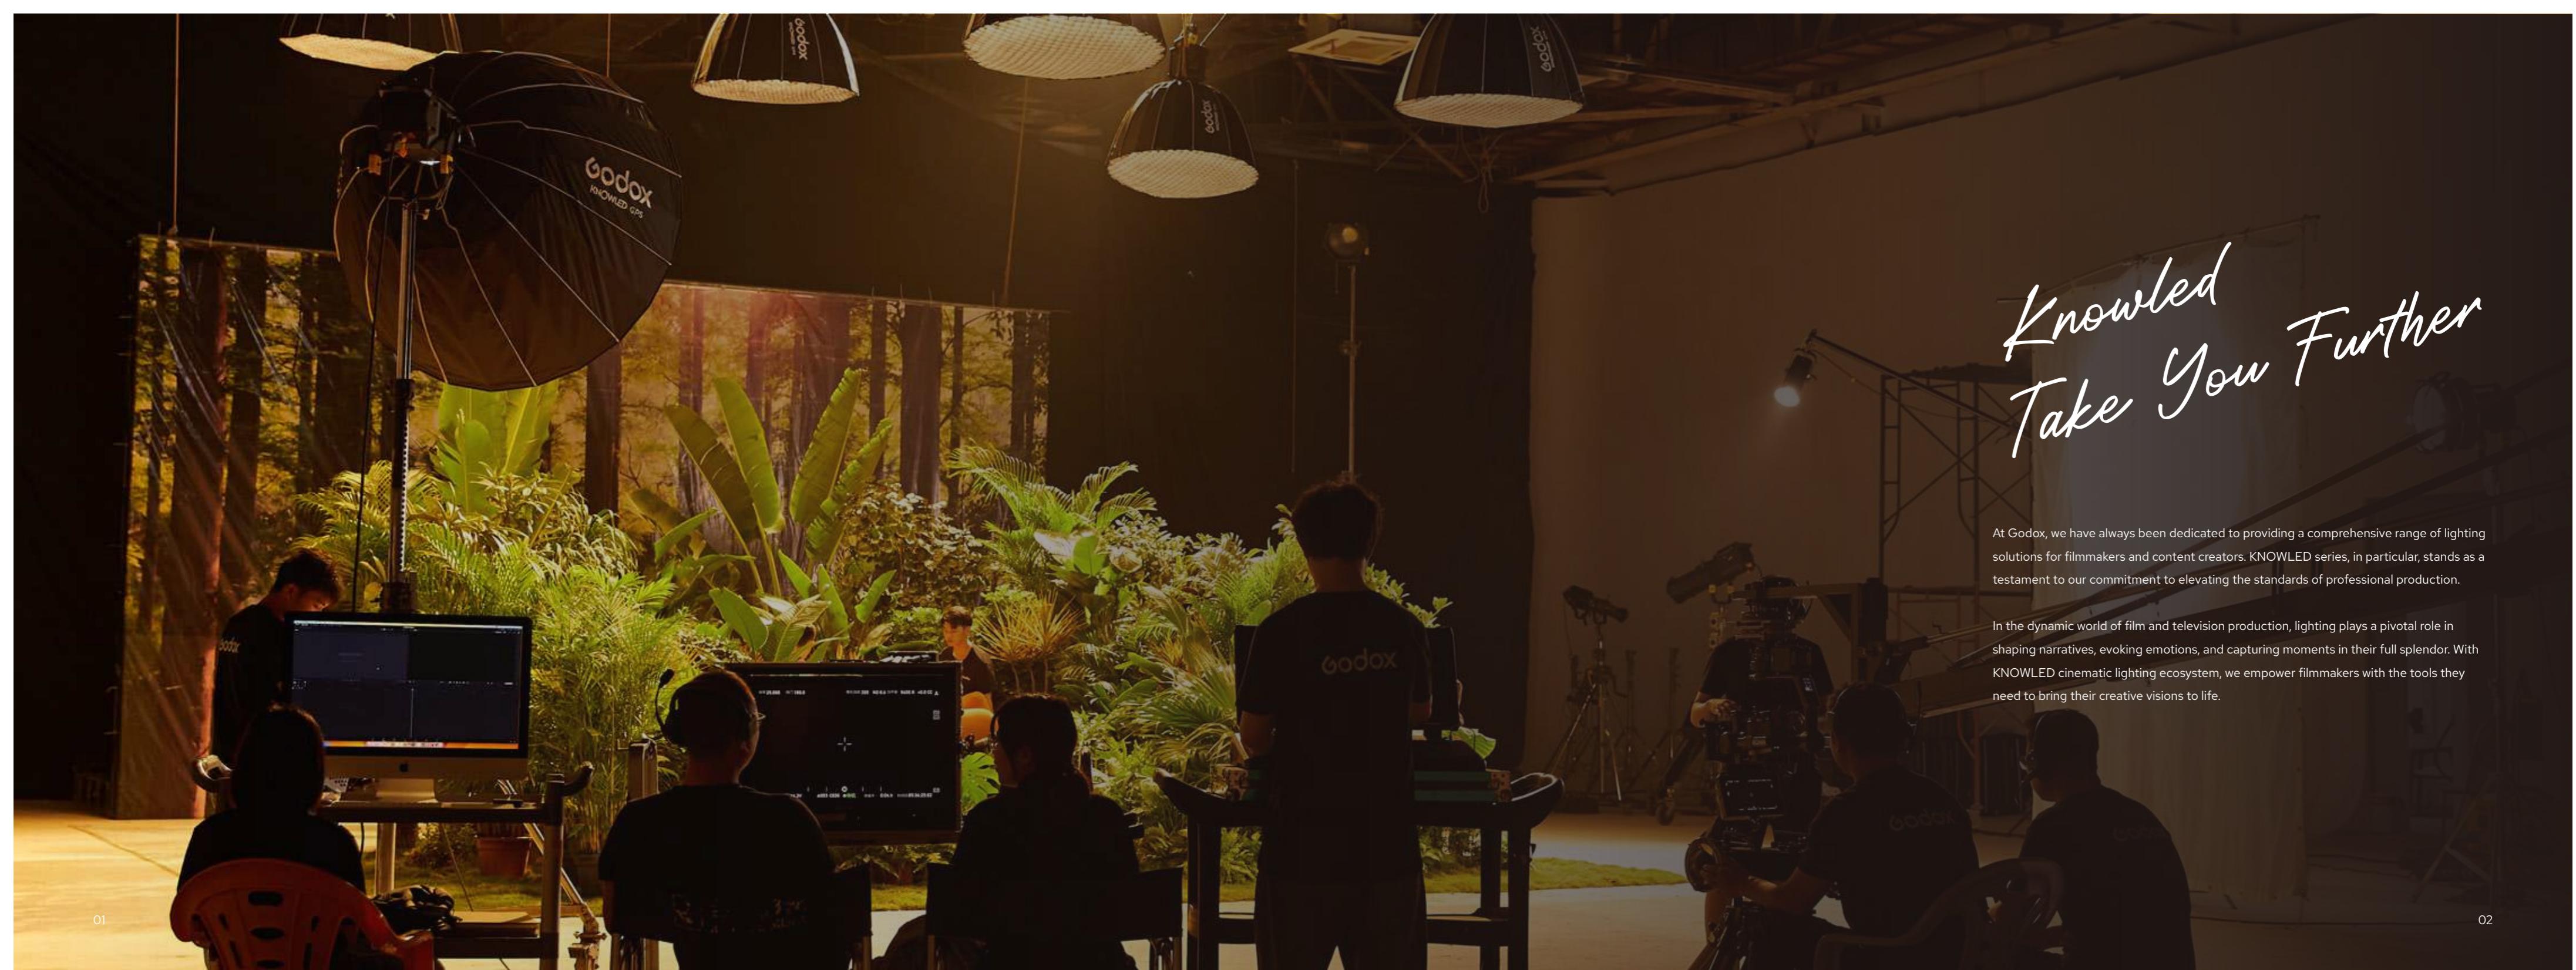

*Knownled
Take You Further*

At Godox, we have always been dedicated to providing a comprehensive range of lighting solutions for filmmakers and content creators. KNOWLED series, in particular, stands as a testament to our commitment to elevating the standards of professional production.

In the dynamic world of film and television production, lighting plays a pivotal role in shaping narratives, evoking emotions, and capturing moments in their full splendor. With KNOWLED cinematic lighting ecosystem, we empower filmmakers with the tools they need to bring their creative visions to life.



CONTENTS

- 05 • COB Light
 - MG6K
 - MG4K
 - MG2400R
 - MG1200R
 - MG1200Bi
 - M1000R
 - M600R
 - M600Bi Pro/M600Bi
 - M300R
- 41 • MS Series
 - MS60R/Bi
- 45 • Focusing Light
 - S60/S60Bi
- 51 • Panel Light
 - P600Bi Hard
 - P600R Hard/P1200R Hard
 - P1200R Hard PRO/P600R Hard PRO
 - P300R/P600R
- 71 • Flexible LED Mat
 - AM1600R
 - F100R/F200R/F200SR/F400R/F800R
 - F200Bi/F400Bi/F600Bi

- 87 • Tube Light
 - TP2R/TP4R/TP8R
- 93 • Air Tube Light
 - AT200Bi
- 97 • Ambient Light
 - C5R/C7R/C10R
- 103 • Cine Lighting Reflector
 - LiteFlow 7/15/25/50/100
- 109 • Control System
 - KNOWLED APP
- 111 • Accessory
 - BeamLight Max90
 - BeamLight B60/Max60
 - G Mount Projection Attachment GP19K/2K/3K
 - Flat Bowens Mount Projection Attachment BP-19/2K/3K
 - Bowens Mount Projection Attachment VS-A19K/26K/3K
 - DL5 Parallel Booster
 - Fresnel Lens GF14/FLS8/FLS10
 - Adjustable Diffusion AD21/AD32/AD3
 - Scrim Flag SF6090/SF4560 Kit
 - Parabolic Softbox QR-P70/P90/P120
 - Softbox Series SB Series
 - Lighting Stands

KNOWLED COB LIGHTS





SPECS

Model	MG6K	MG4K	MG2400R	MG1200R	MG1200Bi
Luminance(with reflector)	41,000Lux with MGR30 @5m(5600K)	25,600Lux with MGR30 @5m(5600K)	32,100Lux with GR45 @3m(5600K)	118,000Lux with GR15 @3m(5600K)	149,000Lux with GR15 @3m(5600K)
Color Version	Bi-color	Bi-color	Full-color	Full-color	Bi-color
CCT	2800K-10000K	2800K-10000K	1800K-10000K	1800-10000K	2800K-6500K
Max. Power	4300W	2300W	2650W	1600W	1400W
Color Rendering	CRI≈97/TLCI≈97	CRI≈97/TLCI≈98	CRI≥94/TLCI≥92	CRI≥96/TLCI≥95	CRI≥96/TLCI≥96/TM-30 Rf≥92
GM Adjustment	-100%-100%	-100%-100%	-100%-100%	/	/
Weather Resistance	IP65	IP65	IP65	IP65	IP65
Controls	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/ APP/On-board	CRMX/Ethernet/DMX/Removable panel/ Removable panel/APP/On-board	CRMX/Ethernet/DMX/Removable panel/ App/On-board/Remoter
Power Supply	AC	AC	AC	AC	AC
Dimension					
Light Body	356*378*434mm	365*339*300mm	16.1*15.16*14.02/409*385*356mm	400*589*339mm	378*579*354mm
Controller	270*210*421mm	238*177*330mm	11.02*16.54*8.27/280*420*210mm	189*174*404mm	162*190*372mm
Weight					
Light Body	25kg	10kg	21kg	9.8kg	16kg
Controller	12kg	6.4kg	12kg	6.7kg	6.68kg



SPECS

Model	M1000R	M600R	M600Bi Pro	M30R
Luminance(with reflector)	20,400Lux with GR30 @3m(5600K)	136,000Lux with BR45 @1m(5600K)	18,800Lux with BR60 @3m(5600K)	3,880Lux with BR30 @5m(5600K)
Color Version	Full-color	Full-color	Bi-color	Full-color
CCT	1800K-10000K	1800K-10000K	2800K-6500K	1800K-10000K
Max. Power	1150W	720W	650W	46W
Color Rendering	CRI≥95/TLCI≥94	CQS≥95/CRI≥96/TLCI≥96	CRI≥97/TLCI≥98	CRI≥96/TLCI≥95
DMX(RDM)/LumenRadio CRMX/ Weather Resistance	DMX(RDM)/LumenRadio CRMX/ IP65	IP54	IP54	IP65
Controls	Ethernet (Art-Net & sACN)/ Bluetooth app/controller	CRMX/Ethernet/DMX/ App/On-board	DMX/LumenRadio CRMX/Ethernet/Art-Net & sACN Bluetooth app/remote controller control (controller is sold separately)	DMX15 controller, support RDM protocol/ LumenRadio CRMX/Ethernet/Art-Net & sACN protocol/Bluetooth app/controller control
Power Supply	AC	AC	AC	AC & V-mount Battery
Dimension				
Light Body	7.8*7.4*14.53/198*188*369mm	317*501*347mm	174*298*177mm	7.0*9.6*11/18.0*14.0*5.6mm
Controller	7.44*6.34*12.64/189*161*321mm	189*166*334mm	189*166*334mm	6.35*5.5*9.8/17.4*19.4*4.2mm
Weight				
Light Body	8.1kg	10kg	4.6kg	3.6kg
Controller	5.6kg	6kg	5.5kg	3.1kg

Bi Color LED Light | MG6K



Bi Color LED Light | MG6K



Brighter
Than a 6kW HMI



Lightweight
Design



Wide CCT range:
2800K-10000K



Adjustable/-
Green/Magenta



Comprehensive
G-mount ecosystem

MG6K

- Illuminance surpasses a 6kW HMI in brightness
- 24.5 kg/54 lb lighthead without yoke (28 kg/61 lb with yoke)
- CCT range: 2800K-10000K
- ±100% Green/Magenta adjustment
- 0.1% precision dimming increments
- 4 dimming curves
- CRI≥97, TLCI≥97
- 11 built-in FX modes
- Compatible with G-mount accessory ecosystem
- IP65-rated weather resistance
- High-efficiency heat dissipation
- Control options: DMX (RDM), LumenRadio CRMx, Ethernet (Art-Net & sACN), Bluetooth, WiFi, Controller

Bi Color LED Light | MG6K



+/− Green/Magenta Adjustment



Lightweight Design



Multiple-Light Arrays

41,000 Lux

@5600K, 5m (with MGR30 reflector)

147,000 Lux

@5600K, 5m (with MGR15 reflector)

MG6K

Light Body	x1	Safety Rope	x1
U-type Bracket	x1	DC Power Cord	x1
Controller	x1	AC Power Cord	x1
Protection Cover	x1	Reflector MGR30	x1
Tying Rope	x1		



MG6K K1

Light Body	x1	DC Power Cord	x1
U-type Bracket	x1	AC Power Cord	x1
Controller	x1	Reflector MGR30	x1
Protection Cover	x1	Controller Mounting Device	x1
Tying Rope	x1	Light Case	x1



Bi Color LED Light | MG6K

Bi Color LED Light | MG4K



Bi Color LED Light | MG4K



	110lm/W	10kg		63mm	
4K Hml Brightness	Highest Luminous efficacy	Light head Weight	Green/Magenta Adjustment	Smallest Emitting Area	G-mount

MG4K

- Brighter than 4kW HMI using 2000W instead of 4000W
- 124,000Lux @5m, 5600K with MGR15
- 25,600Lux @5m, 5600K with MGR30
- Compact design that 10kg for light head and 18.9kg for whole setup
- Highest optical efficiency by advanced light engine
- Engineered by 63mm, the smallest emitting area
- No extra blending component needed
- Optimal light concentration to enhance brightness
- 67% faster heat dissipation.
- G/M adjustment: $\pm 100\%$
- CCT range: 2,800K–10,000K
- IP65-rated weather resistance
- Compatible with G-mount accessory ecosystem

Bi Color LED Light | MG4K

25,600Lux

@5m, 5600K (with MGR30 30°reflector)

2000W


Power Output



Highest Optical Efficiency, Highest Luminous Efficacy in 110lm/W



10Kg for Light Head, Less than 19Kg for full setup

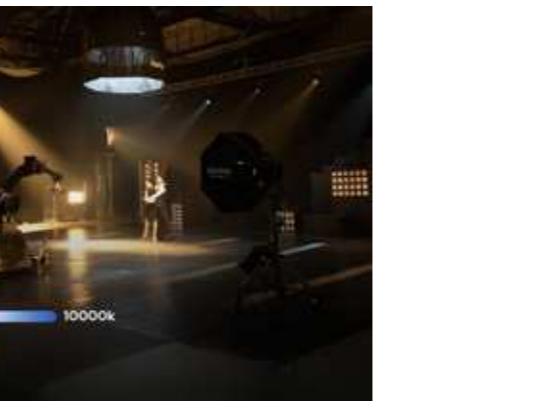

G/M adjustment: ±100%, CCT range: 2,800K-10,000K

Bi Color LED Light | MG4K



MG4K

Light Body	x1	Safety Rope	x1
U-type Bracket	x1	DC Power Cord	x1
Controller	x1	AC Power Cord	x1
Protection Cover	x1	Reflector MGR30	x1
Tying Rope	x1	Controller Mounting Device	x1



MG4K K1

Light Body	x1	DC Power Cord	x1
U-type Bracket	x1	AC Power Cord	x1
Controller	x1	Reflector MGR30	x1
Protection Cover	x1	Controller Mounting Device	x1
Tying Rope	x1	Flight Case	x1

Full-color LED Light | MG2400R



17

Full-color LED Light | MG2400R



POWER
2650W

Power 2650W

Full Color Adjustable

G-Mount

Built-in CRMX

IP65
Weatherproof

MG2400R

- 2650W high brightness full-color LED
- Instant switch between white and RGB colors
- CCT: 1800K-10000K
- ±100% Green/Magenta adjustment
- Complete G-mount accessory ecosystem
- Optimized optical system for maximum output efficiency
- Supports Projection, Fresnel, BeamLight, Softbox, and more
- Rugged build for heavy-duty on-set use
- Full IP65 weather-resistance
- Flicker-free at high frame rates
- KNOWLED color management for fixture consistency
- Control options: CRMX, DMX, Ethernet, Bluetooth, controlle

18


Full-color LED Light | MG2400R



Native Optics, Maximum Performance



High Output, Infinite Colors

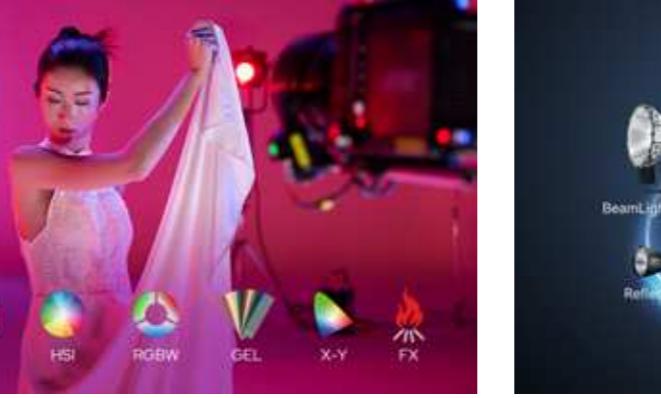

Complete G-mount Accessory Ecosystem



Full-color LED Light | MG2400R



MG2400R

Light Body	×1	Controller Mounting Device	×1
U-type Bracket	×1	Yi Ting Rope	×1
Controller	×1	Safety Rope	×1
Protection Cover	×1	DC Power Cord	×1
Reflector GR45	×1	AC Power Cord	×1
Industrial Plug (varies by country)	×1		



MG2400R K1

Light Body	×1	Yi Ting Rope	×1
U-type Bracket	×1	Safety Rope	×1
Controller	×1	DC Power Cord	×1
Protection Cover	×1	AC Power Cord	×1
Reflector GR45	×1	Storage Bag SC18	×1
Controller Mounting Device	×1	Storage Bag SC19	×1
Industrial Plug (varies by country)	×1		



MG2400R K2

Light Body	×1	Controller Mounting Device	×1
U-type Bracket	×1	Yi Ting Rope	×1
Controller	×1	Safety Rope	×1
Protection Cover	×1	DC Power Cord	×1
Reflector GR45	×1	AC Power Cord	×1
Industrial Plug (varies by country)	×1		

Full-Color LED Light | MG1200R



Full-Color LED Light | MG1200R



POWER
1500W

High Output



Full Color



Lightweight Design



G-Mount Accessories


MG1200R

- Full-Color Lighting 1800K-10000K range for versatile effects.
- 1500W power with vivid color saturation.
- HSI, RGBW, GEL, X-Y, CCT, FX for creative use.
- Seamless Integration with Entire Setup.
- Only 9.8kg for easy handling.
- 0.1% precision for low-light adjustments.
- Flicker-Free at High Speeds.
- DMX, CRMX, Ethernet, Bluetooth with app integration.
- Leading Accessory Ecosystem.

Full-Color LED Light | MG1200R



Exceptional Lighting Performance

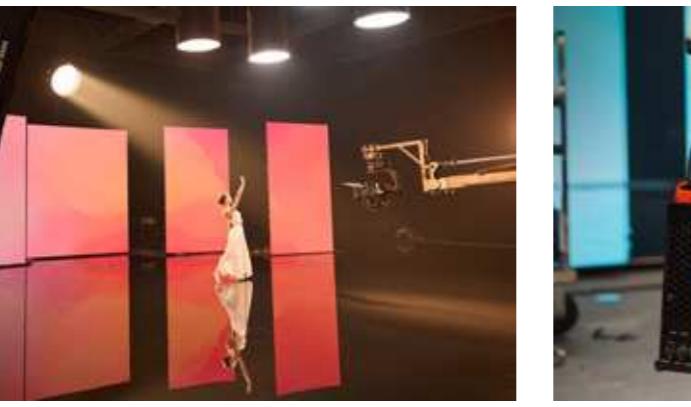

Full-color Stage shooting



Built for Easy Handling

MG1200R

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1

Super Clamp	×1
Tying Rope	×1
Safety Rope	×1
Protective Cover	×1
DC PowerCord	×1
U-Bracket	×1
AC Power Cord	×1
GR45 Reflector	×1
AC Power Cord	×1
Super Clamp	×1

MG1200R K1

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1
Tying Rope	×1
Safety Rope	×1
Protective Cover	×1
DC PowerCord	×1
AC Power Cord	×1
Carrying Case	×1
Super Clamp	×1



MG1200R K2

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1
Tying Rope	×1
Safety Rope	×1
DC Power Cord	×1
AC PowerCord	×1
Protective Wheeled Case	×1
Super Clamp	×1

MG1200R K3

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1
Tying Rope	×1
Safety Rope	×1
DC PowerCord	×1
AC Power Cord	×1
Light Case	×1
Super Clamp	×1

Full-Color LED Light | MG1200R



MG1200R K1

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1
Tying Rope	×1
Safety Rope	×1
Protective Cover	×1
DC PowerCord	×1
AC Power Cord	×1
Carrying Case	×1
Super Clamp	×1



MG1200R K3

Light Head	×1
Controller	×1
Protective Cover	×1
U-Bracket	×1
GR45 Reflector	×1
Tying Rope	×1
Safety Rope	×1
DC PowerCord	×1
AC Power Cord	×1
Light Case	×1
Super Clamp	×1

Bi-color LED Light | MG1200Bi



Bi-color LED Light | MG1200Bi



POWER
1200w

Power 1200W

IP65

Weather Resistance



2800K-6500K



G-Mount



360° rotatable U-Type yoke

with rem

MG1200Bi

- CCT: 2800-6500K
- 1200W power across all color temperatures
- CQS≥94, CRI≥96, TLCI≥96, R15≥92, TM-30 Rf≥92
- Controls: DMX & RDM, LumenRadio CRMX, Ethernet (sACN and ArNet protocols), App control, 2.4GHz remote, on-board and removable panel
- Compatible with Godox G-Mount with a complete light shaping system
- IP65 weather resistance
- 0.1% stepless adjustment
- High efficient heat dissipation system
- 4 dimming curves
- 11 built-in FX effects
- 360° rotatable U-Type yoke
- 8-meters power cord and connecting cord

Bi-color LED Light | MG1200Bi



Night-for-day lighting



Studio set lighting



Sunlight-through-windows simulation



MG1200Bi

Light Body	×1	Power Cable	×1
U-type Bracket	×1	Carry Bag	×1
Controller	×1	Controller Mounting Device PC01	×1
Antenna	×1	Light Protection Cover	×1
Steel Rope	×1	DC Connect Cable	×1
Reflector GR45	×1	Controller	×1



MG1200Bi K1(3 reflectors included)

U-type Bracket	×1	DC Connect Cable	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 1	×1
Light Protection Cover	×1		








MG1200Bi K2(4 reflectors included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		



MG1200Bi K3(4 reflectors & hard case included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case HC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		

ReflectorMGR15
15°ReflectorMGR20
20°ReflectorMGR30
30°ReflectorMGR45
45°ReflectorGF18M
Motorized Fresnel LensMAX60
BeamLight ReflectorMAX90
BeamLight Reflector**Projection Attachment GP19/26/36K**GP26K
Projection Attachment
With 26° LensLens 19° Lens 26° Lens 36° Iris Diaphragm
GP-IDGobo Set GP-GS1
Gobo Set GP-GS2
Gobo Set GP-GS3
Gobo Set GP-GS4
Gobo Set GP-GS5**Softbox**GL3/GL4/GL7
Lantern SoftboxesGP3/GP4/GP5
Parabolic SoftboxesGS33/GS34/GS44
Rectangular SoftboxesGO3/GO4/GO5
Octa Softboxes**Liteflow**LiteFlow
Reflector**Diffusion**AD21/32/33
Adjustable Diffusion**Motorized Bracket**ZB03
Zoom Beam Bracket**Reflector For MG1200R/Bi MG2400R/Bi**GR15
15° ReflectorGR30
30° ReflectorGR45
45° ReflectorGR60
60° ReflectorGF14
Fresnel LensGF14B
Barndoors for Fresnel LensGR58
Barndoors


GR30E Barndoors

Soft Case & Flight CaseSC18
Soft Case for Light Body
(for MG2400Bi/R)SC19
Soft Case for Accessory
(for MG2400Bi/R)FC05
Flight Case (for MG2400Bi/R)FC07
Flight Case (for MG6K)GP-SK1
Skid for GP26K (for MG2400R/Bi MG6K)

Full-color LED Light | M1000R



Full-color LED Light | M1000R



Full-color Adjustable High Power Compact Design Bowens Mount Weatherproof Godox Optical System

M1000R

- 1000W full-color point source with Bowens Mount
- Bright and saturated RGB output
- Compact and lightweight for fast, mobile setups
- Enhanced Bowens Mount for advanced optical modifiers
- Compatible with Godox Optical System for precise light control
- Wide CCT range (1800K-10,000K) with ±100% G/M adjustment
- 14 built-in lighting effects
- IP65-rated weather resistance
- Built-in CRMX, supports DMX512, RDM, Art-Net, sACN, Bluetooth App

Full-color LED Light | M1000R



Lightweight Design, Built to Move



Bright, Bold, Full-Color Output



Godox Optical System, Native Integration



M1000R

Light Body	x1	Tying Rope	x1
U-type Bracket	x1	Safety Rope	x1
Controller	x1	DC Power Cord	x1
Protection Cover	x1	AC Power Cord	x1
Reflector BR30	x1	Controller Mounting Device	x1



M1000R K1

Light Body	x1	Safety Rope	x1
U-type Bracket	x1	DC Power Cord	x1
Controller	x1	AC Power Cord	x1
Protection Cover	x1	Controller Mounting Device	x1
Reflector BR30	x1	Carrying Case	x1

Full-color LED Light | M1000R

Full-color LED Light | M600R



M600R

- Full-color capability
- CCT: 1800K-10000K
- Color light brightness greatly surpassing similar lights at equal power
- 136,000 lux with Reflector BR45 at 1 meter
- Innovative optical design for high-quality output, reduced heat, and long lifespan
- IP54 weather-resistance
- CQS≥95, CRI≥96, TLCI≥96
- Flicker-free performance
- Extreme temperature performance even under -20°C
- Controls: DMX, CRMX, Ethernet (sACN and ArtNet protocol), Bluetooth app control, on-board
- Bowens Mount



What's in the Box



Light Body	×1	Yoke	×1
Reflector BR45	×1	Light Protection Cover	×1
AC Power Cord	×1	DC Cable	×1
Safety Wire	×1	Pipe Clamp	×1
Controller	×1	Soft Case C20	×1
Tying Rope	×1		

Bi-color LED Light | M600Bi Pro/M600Bi



POWER
650W

650W output

IP54

Weatherproof

2800K-6500K

CRMX/DMX/
Ethernet/Bluetooth



Bi-color LED Light | M600Bi Pro/M600Bi



M600Bi Pro

Light Body	x 1
Controller	x 1
Protection Cover	x 1
J-type Bracket	x 1
Reflector Br30	x 1
Tying Rope	x 1
Safety Rope	x 1
DC Power Cord	x 1
AC Power Cord	x 1
Controller Mounting Device	x 1

M600Bi Pro

- CCT: 2800K - 6500K
- IP54 weather resistance
- Smoother, more linear dimming
- Pairs seamlessly with the B60 for parallel beams
- Controls: DMX, CRMX, Ethernet, Bluetooth, and on-board control
- exceptional durability and reliability
- Precise 0.1% dimming control
- 11 Build-in FX effects
- CRI of 97 and TLCI of 98
- Bowens mount for wide compatibility



M600Bi Pro K1

Light Body	x 1
Controller	x 1
Protection Cover	x 1
J-type Bracket	x 1
Reflector Br30	x 1
Tying Rope	x 1
Storage Bag	x 1
Safety Rope	x 1
DC Power Cord	x 1
AC Power Cord	x 1
Controller Mounting Device	x 1

Full Color LED Light | M300R



39




Full-Color
Capability



Green/Magenta
Adjustable



Weatherproof



Built-in CRMX

M300R

- Full-color COB light with high brightness of color
- Multiple modes including CCT, HSI, RGBW, GEL, XY and FX
- GM adjustable
- AC and V-mount battery power supply
- IP65 weather resistance
- CRMX/DMX/APP/On-board control
- Bowens Mount Compatibility
- KNOWLED professional standard ensures high color accuracy
- Lightweight(3.6kg) and robust body built in magnesium aluminum alloy

Optional Purchase



BF10
Fresnel



LiteFlow
Reflector



B60
BeamLight Reflector



CS-D
Lantern Softbox



S-B-W-3560
Strip Softbox



SB-FW-120
Octa Softbox



SB-FW-70-100
Rectangular Softbox



QR-P
Parabolic Softbox



QR-PT
Quick Release Parabolic
Softbox




UL Series
Quick Release Umbrella
Softbox



BP36K
Projection Attachment
With 36° Lens



Lens 19°
Lens 26°

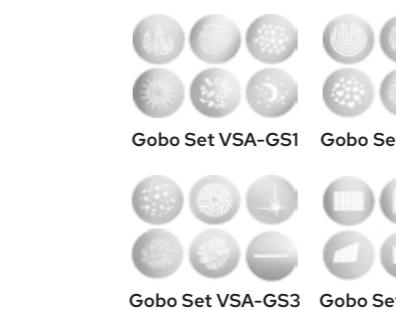

Gobo Set VSA-GS1 Gobo Set VSA-GS2
Gobo Set VSA-GS3 Gobo Set VSA-GS4



CB38
Lens Portable Bag



VSA-ID
Iris Diaphragm



VS-A-1C
Color Effects Set



VS-A-1T
Color Adjustment Set

40



Full/Bi Color LED Light | MS60R/Bi

MS60R/Bi

- All-new Godox magnetic mount
- Lightweight Body (311g)
- High-saturation & Full color
- Multiple Modes: CCT, HSI, RGBW, X-Y, FX
- CCT range from 1800K to 10000K(MS60R)
- 60W Power Supply
- Paired with the S7L2 zoom lens, compatible with S60Bi optical accessories
- Seamless Integration with Godox Optical Ecosystem
- Removable fast-charging battery and GaN power adapter
- Power Options: AC,DC 48V, USB-C, NPF battery, V-mount batteries
- Powered via E27 socket, seamlessly blending into scenes as downlights, spotlights, or stage lights
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control

SPECS

Model	MS60Bi	MS60R
Lithium Battery Parameters	DC14.4V, 3400mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A	DC14.4V, 4300mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A
Light Body USB-C Port Input	20V=3A Max 60W	20V=3A Max 60W
CCT	2800K-6500K	1800K-10000K
Brightness Range	0%-100%	0%-100%
Dimming Curves	Linear, S-curve, exponential, logarithmic	Linear, S-curve, exponential, logarithmic
FX Mode	11	14
CRI	Average≥97	Average≥9
TLCI	Average≥98	Average≥9
Controlling Methods	DMX 512 controller, support RDM protocol / LumenRadio CRMX Bluetooth app control	DMX 512 controller, support RDM protocol / LumenRadio CRMX Bluetooth app control
Bluetooth Controlling Distance	60m	60m
Working Environment Temperature	-20°C~40°C	-20°C~40°C
Dimension	≈3.03" * 3.03" * 3.58" (without lens reflector and battery)	≈3.0" * 3.0" * 3.8" (without lens reflector and battery)
Netweight	≈303g (without lens reflector and battery)	≈311g

Full/Bi Color LED Light | MS60R/Bi

MS60R/Bi



Light Body×1
Lens Reflector×1
Battery×1
MS60BAT01
Metal Holder Bracket×1
AD-E2
USB-C Charging Cord×1
(80cm)
Storage Bag×1

MS60R/Bi 4K(4 Light Kit)

Main Kit



Optional Purchase

MS60R/Bi 2K(2 Light Kit)



E27 Mount Adapter×2
Power Cord×2
1 to 4 Power Cord×1
Carry Case×1

Full/Bi Color LED Light | MS60R/Bi

Accessories Kit



Magnetic Kit×2
MK
Zoom Lens×2
SZL2
Collapsible Diffusion Dome×2
SD15
Parallel Beam Booster×2
DL5 Lite
Parabolic Softbox×1
SP1
Rectangular Softbox×1
SS11
Carry Case×1

Optional Accessories



Parallel Beam Reflector
BeamLight S20
Octa Softbox
SO2
Lantern
SL1
Reflector
SR15
NPF Battery
Adapter MS60NPA
Snoot
AK-SN
GOBO Projection
SP36K
GOBO Projection
SP50K
DMX Adapter
DMX-C-2

Gobo Set
SA-09-001
Gobo Set
SA-09-002
Gobo Set
SA-09-003
Gobo Set
SA-09-004
Projection Diffuser
SP-DUST
Color Frame
SP-CTF
Iris Diaphragm
SP-ID
Gobo Holder
CC Adjustment Set
SA-11T
Color Effects Set
SA-11C



+

+



FOCUSING LIGHTS



SPECS

Model	S60	S60Bi
Power Supply	AC Power Supply: 100~240V 50/60HZ 0.9A MAX V-port battery: Standard voltage: 14.8V (optional)	AC Power Supply: 100~240V 50/60HZ 0.9A MAX V-port battery: Standard voltage: 14.8V (optional)
Output Power	60W	77W
CCT	5600K±300K	2800K±6500K
100% Illuminance(LUX)(1m,darkroom)(~)	Spot (Central Area): 3200 Flood (Central Area): 40000	Spot (Central Area): 3200 Flood (Central Area): 40000
CRI/TLCI	≥96/≥97	≥96/≥97
Brightness Range	0~100%	0~100%
Channel(CH)	32 (1 to 32)	32 (1 to 32)
Group (GR)	16 (A to F/0 to 9)	16 (A to F/0 to 9)
Beam Angle	6°-55°	6°-55°
Working Environment Temperature	-10~40°C	-10~40°C
Control Method	Smartphone APP/2.4G wireless remote control/DMX control	Smartphone APP/2.4G wireless remote control/DMX control
2.4G Wireless Transmission Distance(~)	50m	50m
Dimension	Light Body: 264*107*100mm/Controller: 268*113*64mm	Light Body: 264*107*100mm/Controller: 23*12*6mm
Weight	Light Body: 1.36kg/Controller: 0.94kg	Light Body: 1.36kg/Controller: 1kg

Focusing Lights | S60/S60Bi



Focusing Lights | S60/S60Bi



Beam Angle 6°-55°



2800-6500K(Bi)



CRI≥96



TLCI≥97



Silent mode

S60/S60Bi

- Beam angle from 6 to 55 degrees, light where you want
- Variable Color Temperature
- CRI≥96, TLCI≥97
- Lighting FX
- Silent mode
- Controls: Godox Light app, remoter, and DMX

Focusing Lights | S60/S60Bi



Simulating natural backgrounds



Adding atmosphere for scene




Product shooting



S60/S60Bi


Light Head	×1
Controller Box	×1
SA-08 Barndoors Set	×1
Wrench	×1
Connect Cable	×1
Power Cable	×1

Abundant Accessories

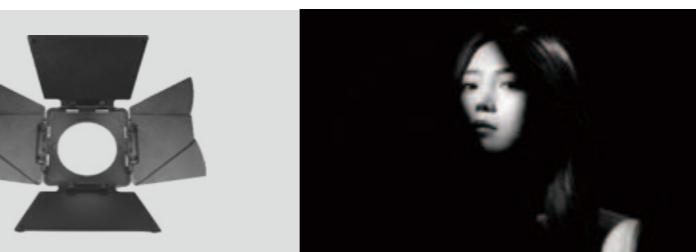

SA-08 Barndoors Set

Barndoors set: to precisely control the light beam as required. There are small clips on the plate for clipping diffusion fabric or gels on.

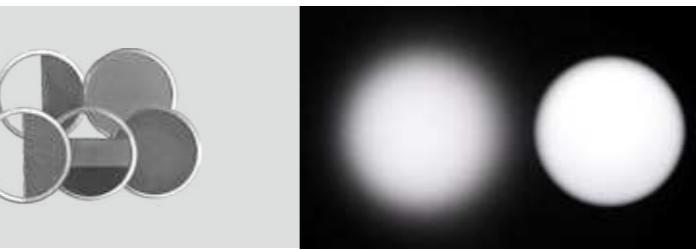


SA-05 Scrim set

To reduce the light intensity and control the light graduation.

Projection attachment: project a highly focused and controlled beam of light. This attachment is what enables you to get the utmost out of creativity of Focusing light series. It is specially designed for fitting a vast range of light shaping accessories.



Focusing Lights | S60/S60Bi

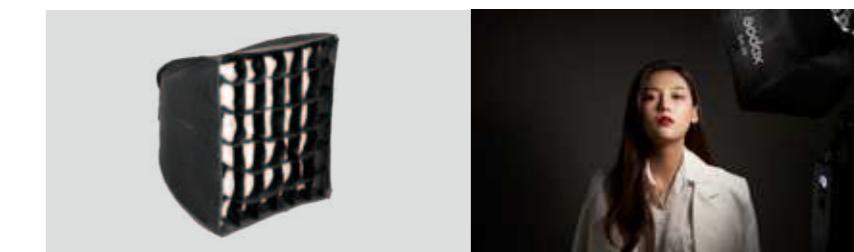

SA-30/SA-20 Softbox

Offers soft and even light effects.



SA-07 Scrim set

To reduce the light intensity and control the light graduation.



SPECS

Model	P600Bi Hard	P600R Hard/P1200R Hard	P600R Hard PRO/P1200R Hard PRO	P 300R/P600R
Luminance	11,400Lux @3m (5600K)	8,980Lux /17,100Lux @3m (5600K)	22,600Lux/16,245Lux @3m (5600K)	1,620Lux/23,200Lux @3m (5600K)
Color Version	Bi-color	Full-color	Full-color	Full-color
CCT	2800K-6500K	1800K-10000K	1800K-10000K	1800K-10000K
Max. Power	650W	700W/1500W	670W/1300W	350W/700W
Color Rending	CQS≥93/CRI≥96/TLCI≥96	CQS≥95/CRI≥96/TLCI≥96	CRI≥96/TLCI≥98	CQS≥95/CRI≥95/TLCI≥96
Controls	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board	CRMX/DMX/App/On-board	CRMX/DMX/Ethernet/App/On-board
Power Supply	AC	AC	AC	AC/DC/48V
Dimension(Yoke included)	571*499*121mm	496*386*166mm/834*606*170mm	433*386*166mm/743*386*166mm	563*495*155mm/775*575*153mm
Weight	10kg	11.22kg/18.5kg	13kg/22kg	11.6kg/17.8kg

LED Light Panel | P600Bi Hard



LED Light Panel | P600Bi Hard




POWER
650W

Power 650W



2800K-6500K



93,800Lux at 1 meter



UWB Radio CRMX



Lightweight 10KG

P600Bi Hard

- CCT: 2800K-6500K
- 650W full output across all color temperatures
- A 10kg 1x1 panel
- 93,800Lux at 1 meter
- Precisely designed optical lens
- CRI>96, TLCI>96
- 0.1% stepless adjustment from 0.1% to full power
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Aerospace-grade heat dissipation

LED Light Panel | P600Bi Hard



Combined use as key light



Interior lighting




Green screen lighting solution



P600Bi Hard

Light Body	x1
Tying Rope	x1
Safety Rope	x1
Hex Wrench	x1
U-type Bracket	x1
Antenna	x1
AC Power Cable	x1

Optional Purchase

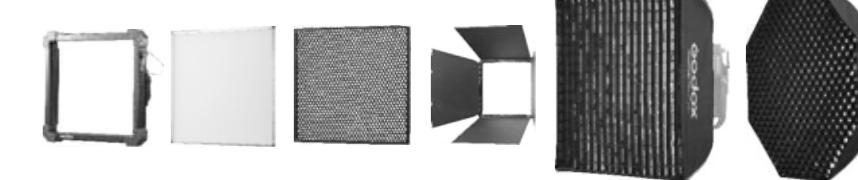

P600RH AD P300RD P300RH30 P300RB4 P300RS33 P300R4
Adapter Diffusion Honeycomb Barndoors Rectangular Softbox Octa Softbox

Compatible with certain accessories of P300R when using Adapter P600RH AD

Optional Purchase



Space Light Softbox P600BHSS



Rectangular Softbox (24"x24") P600BHS22



2-light Bracket AB02



4-light Bracket AB04




Junior Offset Arm HJ02



Junior Multi-header HJ04



Softbox (2'x3') for AB02 AB02S23

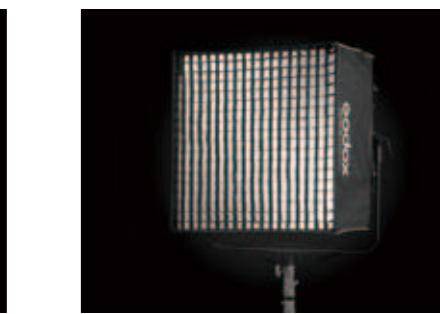

Softbox (3'x3') for AB02 AB02S33

LED Light Panel | P600R Hard/P1200R Hard



LED Light Panel | P600R Hard/P1200R Hard



P600R Hard/P1200R Hard

- CCT: 1800K-10000K
- Full-color capability
- Super power in compact size:
P600R Hard: 650W 1x1 panel
P1200R Hard: 1200W 2x1 panel
- CQS>95, CRI>96, TLCI>96
- Controls: DMX, CRMX, App, and on-board control
- Hard/soft switching with diffusion panels
- Precisely designed optical lens
- High efficient heat dissipation

LED Light Panel | P600R Hard/P1200R Hard



P600R Hard

Light Body	x1	Main Cable	x1
Metal Spacer	x2	Safety Wire	x1
Direction Adjusting Handle	x1	Screw	x1
Yoke	x1	HexWrench	x1
Plastic Spacer	x2		

Light Body	x1	Main Cable	x1
Metal Spacer	x2	Safety Wire	x1
Direction Adjusting Handle	x1	Screw	x1
Yoke	x1	HexWrench	x1
Plastic Spacer	x2		

P1200R Hard

Light Body	x1	Main Cable	x1
Metal Spacer	x2	Safety Wire	x1
Direction Adjusting Handle	x1	Screw	x1
Yoke	x1	HexWrench	x1
Plastic Spacer	x2		

Optional Purchase for P600R Hard




P600BHSS
Space Light Softbox




P600BHS22
Rectangular Softbox
(24"×24")



SCH01
Sling Chain



AB02
2-Light Bracket



AB04
4-Light Bracket



HJ02
Junior Offset Arm



HJ04
Junior Multi-Header

Optional Purchase for P1200R




P1200RHSS
Space Light Softbox




SCH02
Sling Chain




P1200RHS23
Rectangular Softbox




AB02-2
2-Light Bracket



AB03-2
3-Light Bracket




P1200RHS22
2-Light Rectangular Softbox



P1200RHS32
3-Light Rectangular Softbox



P600RB4
Barndoor



P600RS34
Rectangular Softbox



P600R05
Octa Softbox

Compatible with certain accessories of P300R when using Adapter P600R Hard

LED Light Panel | P600R Hard PRO/P1200R Hard PRO



LED Light Panel | P600R Hard PRO/P1200R Hard PRO



P600R Hard PRO/1200R Hard PRO

- 1300W in a compact 2x1 panel—unmatched punch in this form factor
- Full-color control
- Wide native beam angle of 50°~55° for large-area coverage
- IP65-rated for all-weather reliability
- High color accuracy: CRI 96+, TLCI 98+
- 1,800K-10,000K CCT range with G/M adjustment
- Flicker-free at high frame rates
- Built-in CRMX, DMX, Bluetooth and on-board control
- Compatible with a full range of accessories
- Quick-fit design for faster mounting and setup
- Custom dual/triple brackets for multi-light rigs
- Integrated PSU for cleaner setups and easier rigging

LED Light Panel | P600R Hard PRO/P1200R Hard PRO



Light Up Big Scenes with Ease



Full-Color Brilliance, Ideal for Creative Washes



Ready for Any Condition



LED Light Panel | P600R Hard PRO/P1200R Hard PRO



P1200R Hard PRO

Light Body	×1	AC Power Cord	×1
U-bracket	×1	Safety Rope	×1



Light Cord



P1200R Hard PRO K1



Godox



Godox



P600R Hard PRO

Light Body	×1	AC Power Cord	×1
U-bracket	×1	Safety Rope	×1



Light Cord



P600R Hard PRO K1



Godox

Optional Accessories for P1200R Hard PRO



P1200RHDo
Domed Diffuser




P1200RHSS
Space Light Softbox



SCH03
Sling Chain



P1200RHS23
Rectangular Softbox



ABO2-3
2-light Bracket



ABO3-3
3-light Bracket



P1200RHP22
2-Light Rectangular Softbox



P1200RHP32
3-Light Rectangular Softbox



Compatible with certain accessories of P600R when using Adapter P1200R HARD

LED Light Panel | P600R Hard PRO/P200R Hard PRO



P600R Hard PRO

Light Body	×1	AC Power Cord	×1
U-bracket	×1	Safety Rope	×1



Light Cord



P600R Hard PRO K1



Godox


Optional Accessories for P600R Hard PRO



P600RHDo
Domed Diffuser



P600BHSS
Space Light Softbox



P600BHS22
Rectangular Softbox(24"x24")



SCH01
Sling Chain



HJ02
Junior Offset Arm



HJ04
Junior Multi-Head Arm



Compatible with certain accessories of P600R when using Adapter P600R HARD

LED Light Panel | P300R/P600R



LED Light Panel | P300RP/P600R



P300R/P600R

- Full-color capability
- CCT: 1800K-10000K
- Ideal for virtual production applications
- Compact size with higher pixel density in 1x1 ft (4 pixels) and 1x2 ft (8 pixels) option
- Godox's color calibration ensures consistent hues across all units from KNOLED series
- Color spaces including Rec.2020, DCI-P3, and Rec.709
- High brightness with soft light quality
- Flicker-free performance
- CQS≥95, CRI≥96, TLCI≥96
- High-efficiency cooling fan for sustained performance
- Controls: DMX, CRMX, Ethernet, Bluetooth app control, on-board control
- Diverse accessory options available

LED Light Panel | P300R/P600R



P300R

Light Body	x1	Safety Wire		Light Body	x1	Main Cable	x1
Typing Rope	x1	Main Cable		Typing Rope	x1	Quick Setup Softbox	x1



P300R K1 Kit



P600R

Light Body	x1	Safety Wire		Light Body	x1	Main Cable	x1
Typing Rope	x1	Main Cable		Typing Rope	x1	Quick Setup Softbox	x1



P600R K1 Kit

Optional Purchase for P300R



P300RH30 Honeycomb 30°	Safety Wire SW01	P300RB4 Barndoors	P300R11G Grid (for Bare Light)	P300RS33+P300RS33G Softbox 3'x3'+Grid	P300R04+P300R04G Softbox Octa 4'+Grid	AB02 2-Light Bracket	AB04 4-Light Bracket
---------------------------	---------------------	----------------------	-----------------------------------	--	--	-------------------------	-------------------------



AB02S23 Softbox (2'x3') for AB02	AB04S33 Softbox (3'x3') for AB04	MC8B Main Cable	P300RY02 P.O.Yoke	P300RY03 Double Vertical Yoke	P600BHSS Space Light Softbox	P600BHS22 Rectangular Softbox (24" x 24")	SC02 Soft Case	P600RY02 P.O.Yoke	P600RY03 Double Vertical Yoke	SC04 Soft Case	Grid (for Bare Light) P600R1G
-------------------------------------	-------------------------------------	--------------------	----------------------	----------------------------------	---------------------------------	---	-------------------	----------------------	----------------------------------	-------------------	----------------------------------

Optional Purchase for P600R



P600RH30 Honeycomb 30°	P600RB4 Barndoors	P600RS23+P600RS23G Softbox 2'x3'+Grid	P600RS34+P600RS34G Softbox 3'x4'+Grid	P600R05+P600R05G Softbox Octa 5'+Grid
---------------------------	----------------------	--	--	--



Safety Wire SW01	MC8B Main Cable	Grid (for Bare Light) P600R1G
---------------------	--------------------	----------------------------------




SPECS

Model	AM88R	AM48R	F100R	F200R	F200SR	F400R	F800R	F200Bi	F4 Bi	F60 Bi
Luminance	24,600Lux @lm(5600K)	24,600Lux @lm(5600K)	4,740Lux @lm(5600K)	8,900Lux @lm(5600K)	7,900Lux @lm(5600K)	14,400Lux @lm(5600K)	24,200Lux @lm(5600K)	1,130Lux @3m (5600K)	2,280Lux @3m (5600K)	3,240Lux @3m (5600K)
Color Version	Full-color	Bi-color	Bi-color	Bi-color						
CCT	1800-10000K	1800-10000K	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	2700K-8500K	2700K-8500K	2700K-8500K
Max. Power	1800W	1800W	130W	250W	250W	460W	900W(Max.)	210W	410W	670W
Color Rending	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥98	CRI≥96/TLCI≥98	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥96	CRI≥96/TLCI≥96	CRI≥96/TLCI≥96	CRI≥96/TLCI≥96
Controlling Methods	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/App/On-board/Remote/D/ Bluetooth app Control	Bluetooth app Control	Bluetooth app Control	Bluetooth app Control					
Power Supply	100V-240V~50/60Hz	AC/DC 48V/V-mount battery	AC/DC 48V/V-mount battery	AC/DC 48V/V-mount battery						
G/M Adjust	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%
Protection Grade of	IP54	IP65	IP65	IP65						
Light Body/Controller										
Dimension [±]	Bare Light Body AM88R: 2,300*2,300mm	Bare Light Body AM48R: 2,300*1,100mm	Bare Light Body: 344*636mm	Bare Light Body: 637*637mm	Bare Light Body: 344*1220mm	Bare Light Body: 637*1221mm	Bare Light Body: 1221*1221mm	650*631*29mm	1209*692*23mm	120*120*24mm
Controller AM1600R:			Controller:	Controller:	Controller:	Controller:	Controller:	Controller:	124*132*270mm	124*132*270mm
Netweight [±]	Bare Light Body AM88R:12kg	Bare Light Body AM48R:6.7kg	Bare Light Body: 0.6kg	Bare Light Body: 1kg	Bare Light Body: 1.05kg	Bare Light Body: 1.8kg	Bare Light Body: 3kg	1.83kg	3.1kg	3.8kg
	Controller AM1600R:1kg		Controller: 2.8kg	Controller: 2.8kg	Controller: 5.8kg	Controller: 6.5kg	Controller: 7.7kg	3.07kg	3.9kg	

Full-Color Flexible LED Mat | AM1600R



Full-Color Flexible LED Mat | AM1600R

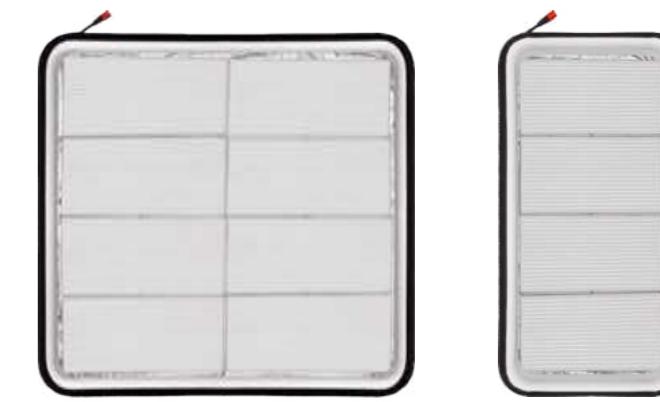


	1600W					
Full-color	1600W High Output	Reinvented Butterfly Airframe	Exceptional Airtightness	Universal Control	Attachable Diffusers	

AM1600R

- 1600W full-color power for large-scale lighting
- Available in 4'x8' and 8'x8' sizes
- Inflates to 8psi in 3 minutes
- No truss needed – 15days without reinflation
- Modular design for connecting or swapping freely
- Versatile detachable accessories: pancake, grids and more
- Repair kit for efficient, cost-effective maintenance
- GM/CCT/HSI/RGBW/GEL/FX adjustment
- CRI≈96/TLCI≈97
- IP54-rated for outdoor use
- CRMX/DMX/App/On-board control



Full-Color Flexible LED Mat | AM1600R

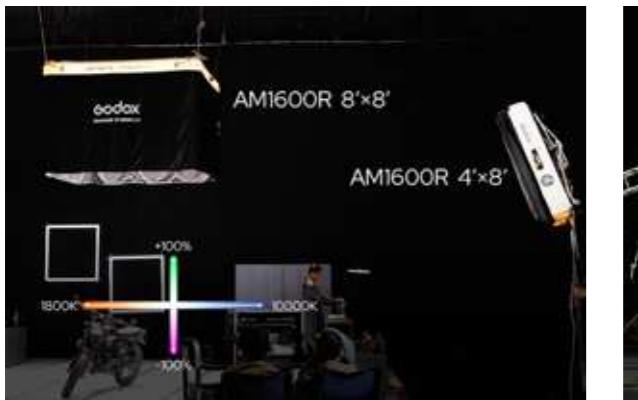

Two Size Available




Rigging without truss




8Psi inflation in 3mins for 15 days

AM1600R 48K

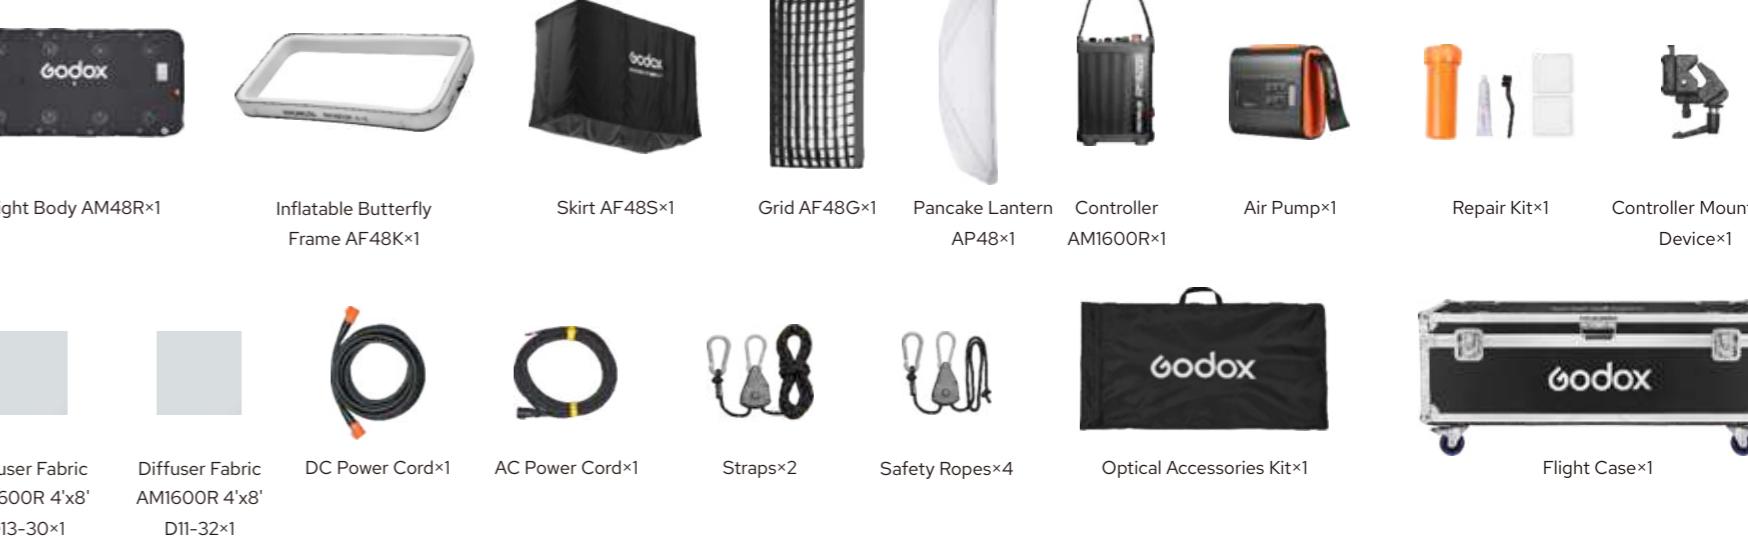


AM1600R 88K

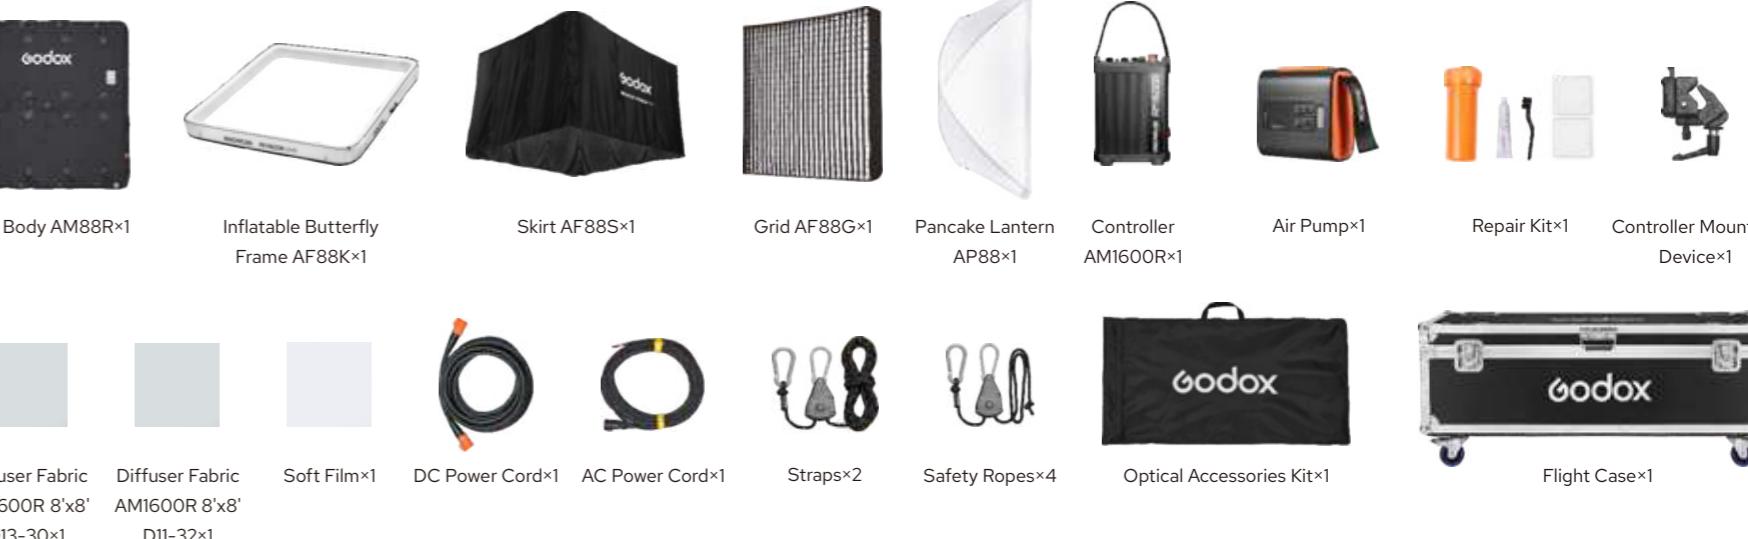


Full-Color Flexible LED Mat | AM1600R

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

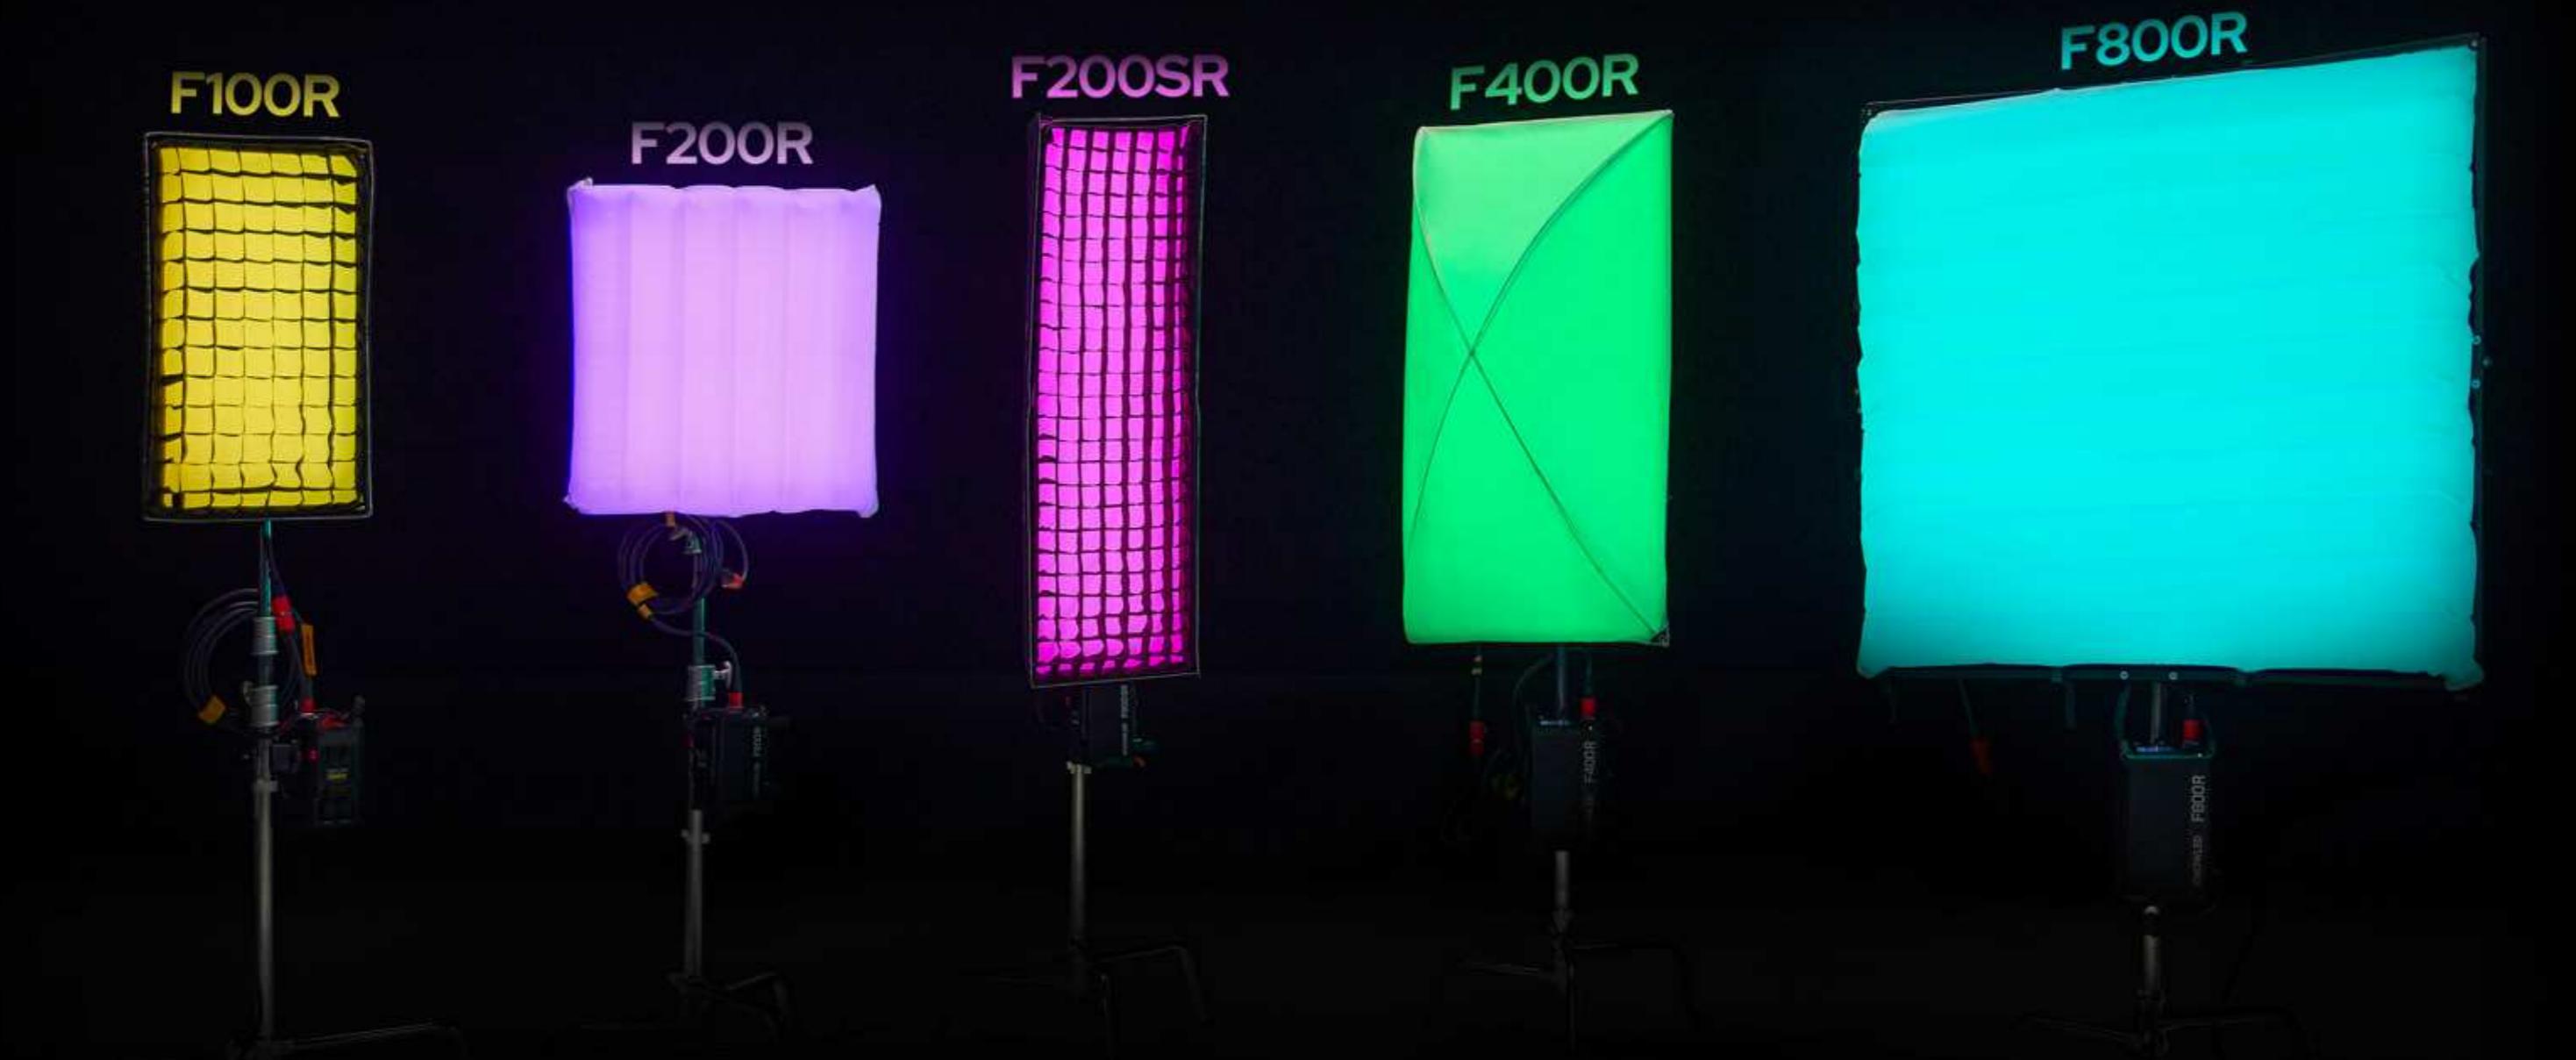

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

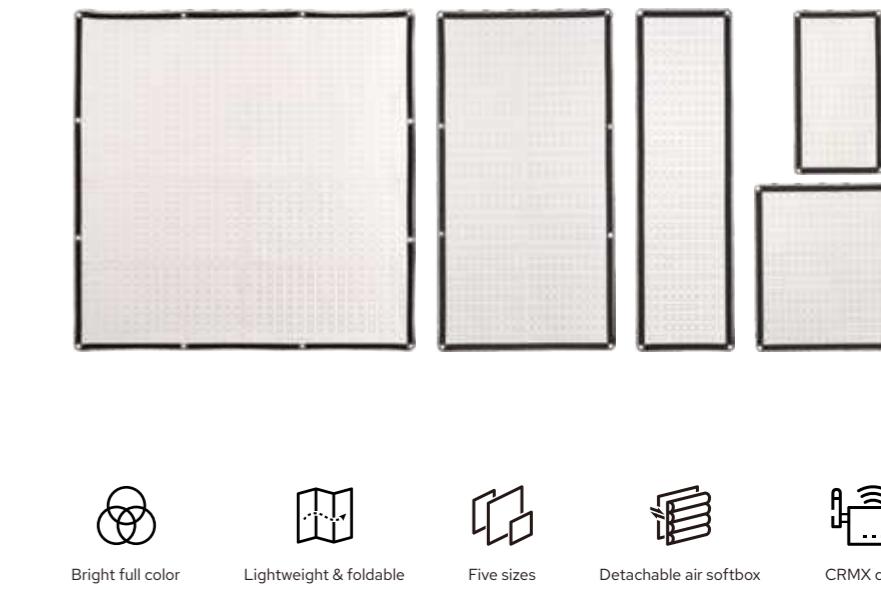


F100R/200R/200SR/400R/800R

- Full-Color Brightness for Every Scene
- Five Sizes: 1'x2'/2'x2'/1'x4'/2'x4'/4'x4'
- Light mats in 100W, 200W, 400W, 800W Options
- Compact and flexible for tight spaces
- High power in a slim design
- Light head IP54, control box IP54
- CCT range from 1800K to 10000K, adjustable G/M
- New air softbox available for each size
- Enhanced frame stability, high-quality softbox, QUICK installation
- CRI96+, TLCI 97+
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control
- Power Options: AC/DC 48V, V-mount batteries


Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R



Space-Constrained Solution

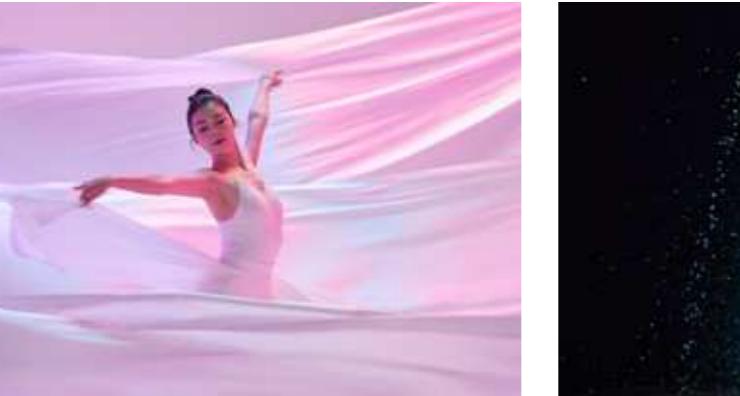


Soft Light Film Set

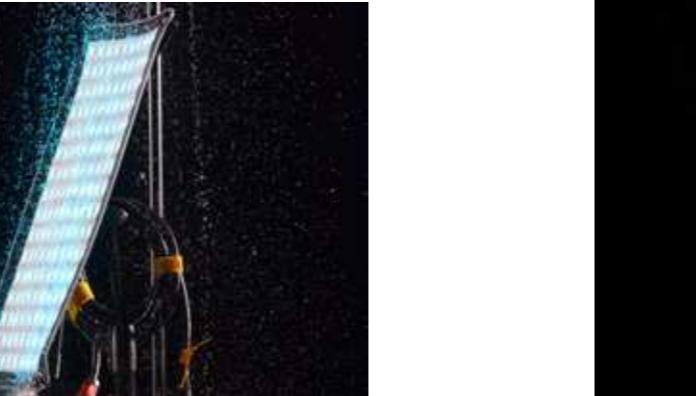

Rainy Day Shooting

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

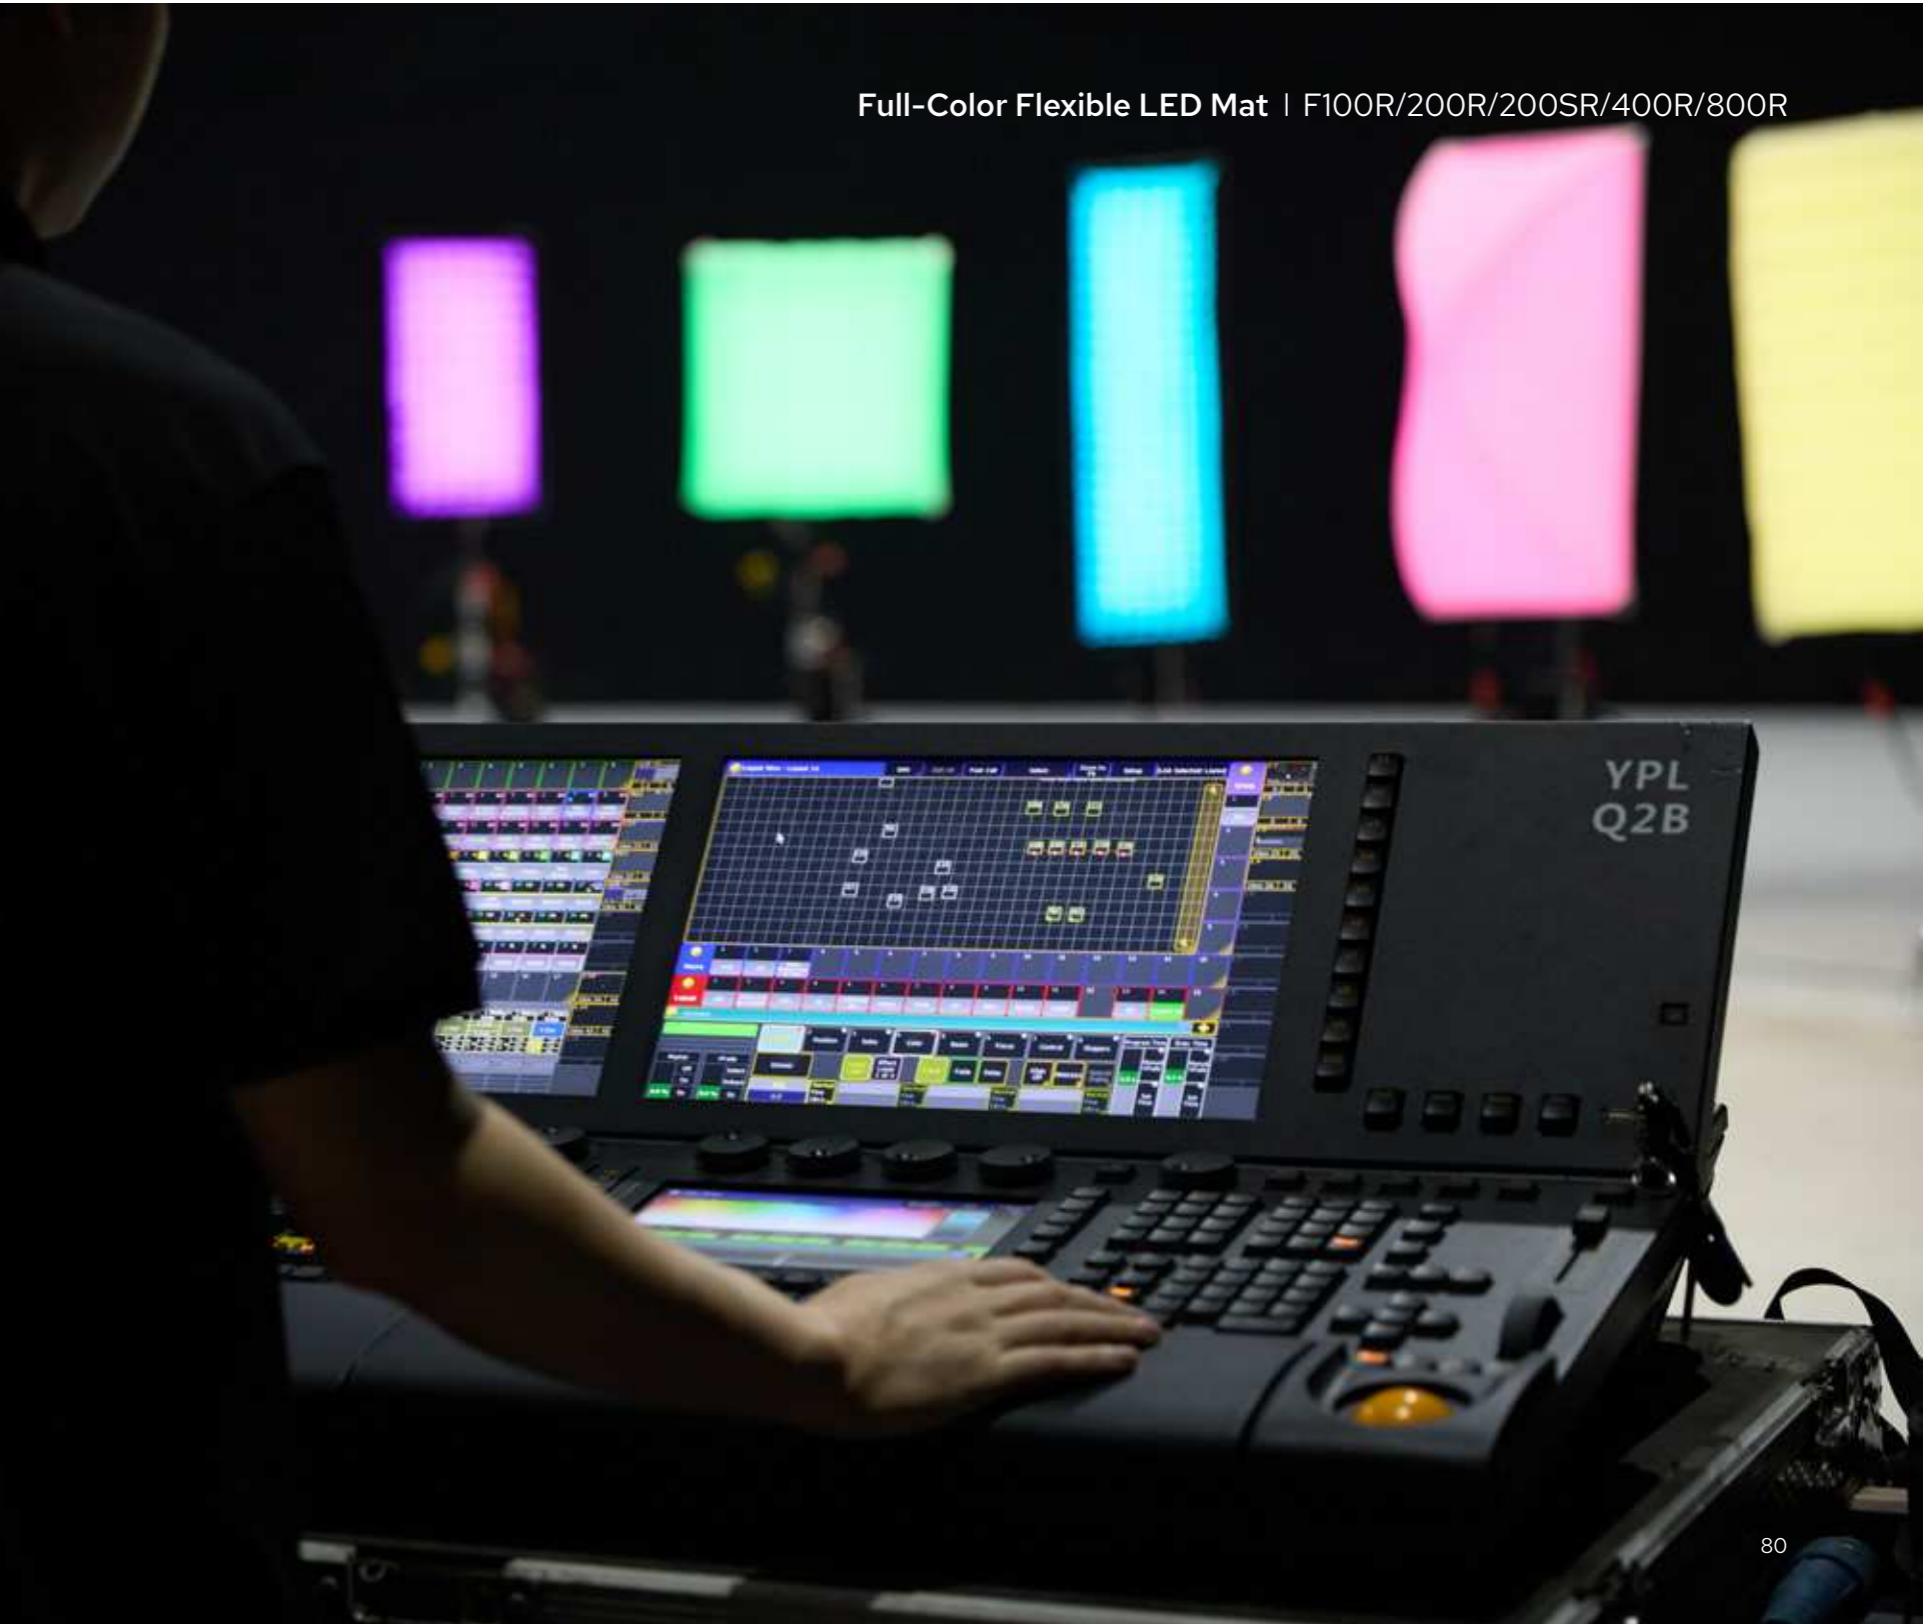

Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R



F100R K1

Light Body	x1	X Bracket	x1
DC Connection Cable	x1	Light Stand Mounting Adapter	x1
Softbox FS100	x1	Controller	x1
AC Power Cable	x1	Carrying Bag	x1



F200R K1

Light Body	x1	X Bracket	x1
DC Connection Cable	x1	Light Stand Mounting Adapter	x1
Softbox FS200	x1	Controller	x1
AC Power Cable	x1	Carrying Bag	x1



F200SR K1


Light Body	x1	X Bracket	x1
DC Connection Cable	x1	Light Stand Mounting Adapter	x1
Softbox FS200S	x1	Controller	x1
AC Power Cable	x1	Carrying Bag	x1



F400R K1

Light Body	x1	Light Stand Mounting Adapter	x1
DC Connection Cable	x1	Controller	x1
Softbox FS400	x1	Carrying Bag	x1
AC Power Cable	x1	Protective Cloth	x1
X Bracket	x1		


Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

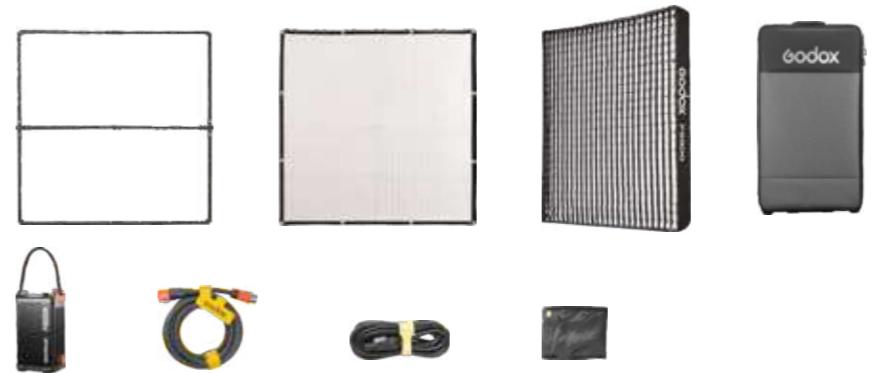

F800R K1

Light Body	x1	Metal Frame	x1
DC Connection Cable	x1	Protective Cloth	x1
Softbox FS800	x1	Controller	x1
AC Power Cable	x1	Carrying Case	x1

Optional Purchase

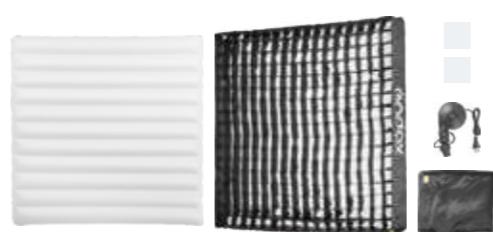

Air Softbox Kit
 Air Softbox body×1 Grid×1 Skirt×1 Air Pump×1 Repair Patch×2
 FA800 for F800R/FA400 for F400R
 FA200S for F200SR/FA200 for F200R
 FA100 for F100R



AT200
 Air Tube×1 Skirt×1 Grid×1 Air Pump×1
 Repair Patch×2 Fabric Handle×2
 Connecting Holder×1 Velcro Hook Fastener×1
 FA100 for F100R



Pancake Lantern
 FP600 for F800R
 FP400 for F400R
 FP200 for F200R




Skirt for F100R Softbox Kit
 SS-F800 for F800R/S-F400 for F400R
 SS-F200S for F200SR/S-F200 for F200R
 SS-F100 for F100R



5m DC Cable
 F-DC5D for F200R/F200SR/F100R
 F-DC10E for F400R/F800R
 F-DC5E for F400R/F800R



10m DC Cable
 F-DC5D for F200R/F200SR/F100R
 F-DC10E for F400R/F800R
 F-DC5E for F400R/F800R



Controller Clamp PC01
 For F800R




Adjustable Support Bracket BP01
 For F800R

Flexible LED Mat | F200Bi/F400Bi/F600Bi



Flexible LED Mat | F200Bi/F400Bi/F600Bi

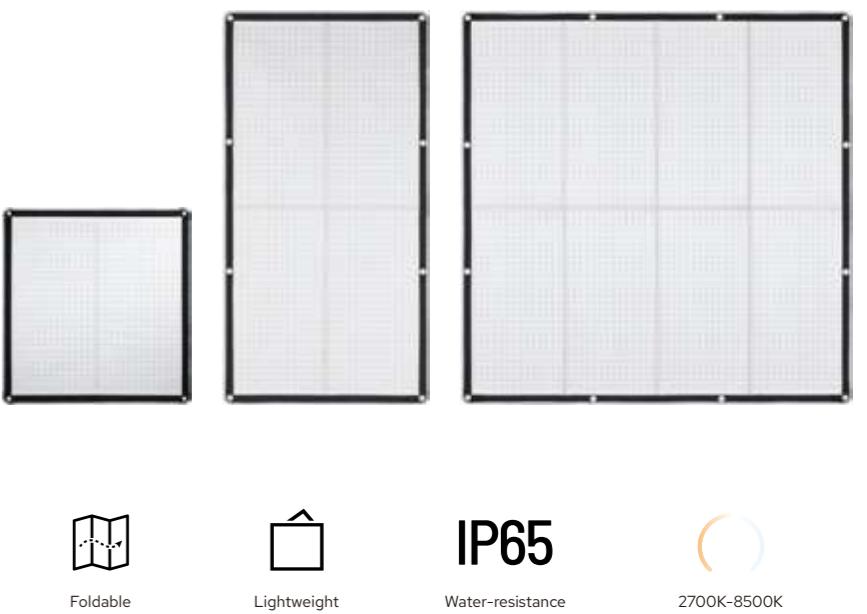

F200Bi/F400Bi/F600Bi

- CCT: 2700K-8500K
- Slim and flexible design suitable for use in narrow or curved spaces
- LED mats in 200W, 400W, 600W options
- Consistent full power output across all color temperatures
- CRI 96+, TLCI 96+
- Linear/S-Curve/Logarithmic/Exponential dimming curve
- Light body with a foldable design and IP65 water resistance
- High-quality aluminum alloy frame construction
- Easy to fold and transport
- Controls: DMX, App control, 2.4GHz remote, on-board
- CRMX support with optional TimoLink receiver (Sold Separately)
- Power options: AC, DC 48V, and V-mount batteries

Flexible LED Mat | F200Bi/F400Bi/F600Bi



Hanging use for close-up shot



Indoor on-location lighting



Narrow-space lighting



Flexible LED Mat | F200Bi/F400Bi/F600Bi



F200Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS200	×1
3m Connect Cable	×1	Carry Bag CB87	×1



F400Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS400	×1
3m Connect Cable	×1	Carry Bag CB87	×1




F600Bi

Light Body	×1	Softbox with Grid FS600	×1
Control Box	×1	Carry Bag CB87	×1
X Bracket	×1	Detachable metal frame ME-F600	×1
5m Power Cable	×1		

Optional Purchase



Pancake Lantern
FP200 for F200Bi
FP400 for F400Bi
FP600 for F600Bi



Flag Frame
FF200 for F200Bi



Remote Control
RC-R9II or RC-A6II



5m DC Cable
F-DC5A for F200Bi
F-DC5B for F400Bi
F-DC5C for F600Bi




Nano Clamp
L-SA-03&LSA-19



Wireless DMX Transmitter and Receiver
TinnoLink TX/TinnoLink RX

TUBE LIGHTS

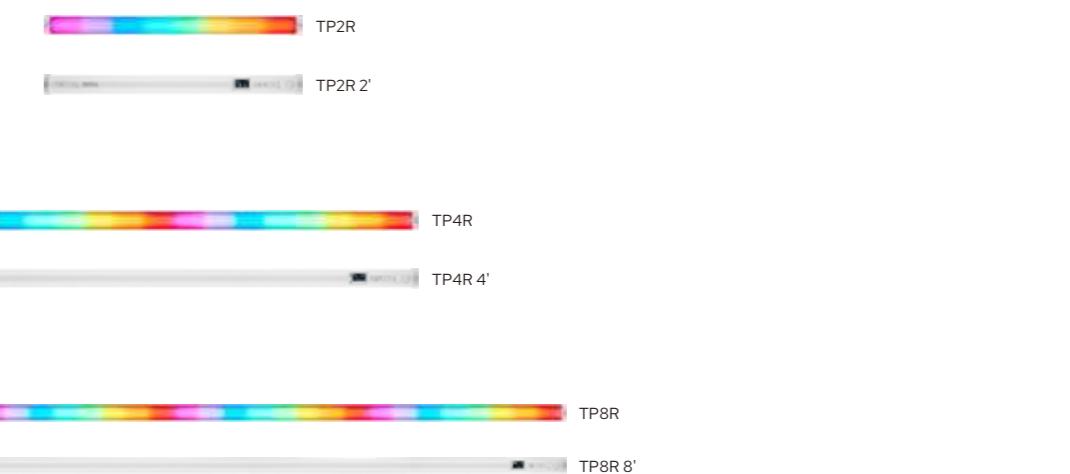

SPECS

Model	TP2R	TP4R	TP8R
Luminance	565Lux @1m (5600K)	765Lux @1m (5600K)	994Lux @1m (5600K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2000K-10000K	2000K-10000K	2000K-10000K
Pixels	16	32	64
Max. Power	26W	47W	83W
Color Rending	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97
Controls	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter
Built-in Battery	Included	Included	Included
Power Supply	AC/built-in battery	AC/built-in battery	AC/built-in battery
Dimension	47*47*600mm	47*47*1200mm	47*47*2400mm
Weight	0.84kg	1.5kg	2.94kg

RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



TP2R/TP4R/TP8R

- High pixel density: 16(TP2R)/32(TP4R)/64(TP8R)
- Sizes: 2'(TP2R)/4'(TP4R)/8'(TP8R)
- CCT: 2000-10000K
- RGBWW capable
- CRI≥96, TLCI≥96
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Selectable 8-bit & 16-bit modes
- 14 built-in FX effects
- 180° rotatable on-board screen for easy reading
- Excellent diffusion panel

RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



Car scene lighting



Music video lighting



Pixel mapping

RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



TP2R
Four-light Kit for TP2R

2'Pixel Tube light	x1
One for Two Adapter	x1
Power Cord	x1
Clip	x1
Bolt	x1
Steel Rope	x1
Carry Case CB76	x1



TP2R-K4
Four-light Kit for TP2R

2'Pixel Tube light	x4
One for Two Adapter	x2
Power Cord	x2
Clip	x4
Bolt	x8
Steel Rope	x8
Carry Case CB76	x1



TP4R-K4
Four-light Kit for TP4R

4'Pixel Tube light	x4
One for Two Adapter	x2
Power Cord	x2
Clip	x8
Bolt	x8
Steel Rope	x8
Carry Case CB77	x1



TP8R-K8
Eight-light Kit for TP8R

8'Pixel Tube light	x8
Power Box	x1
Power Cord	x1
Clip	x16
Double Male Straight CCord	x8
Bolt	x16
Steel Rope	x16
Carry Case CB79	x1

Optional Purchase



Two-light Bracket Kit
TP-B2(for TP2R/TP4R)



Four-light Bracket Kit
TP-B4 (for TP2R/TP4R)



Eight-light Bracket Kit
TP-B8 (for TP2R/TP4R)



Softbox TP-S2/TP-S4
TP-S2A/TP-S4A



Air Soft Tube
TP-S2A/TP-S4A




Power Box
TP-P600



Grid
TP-G2



Grid
TP-G4




Grid
TP-G8



Floor Stand
TP-FS60



Multi-tube Light
Connector TP-M2



DMX Adapter
Cable DMX-C1



TimoLink TX
Wireless DMX Transmitter



One for Two Adapter
TP-A2R/TP-A4R/TP-A8R



10m Power Cable
AC10A



5m C Cable
TP-C5



D-TAP to DC Male
Connector Cable D-T-1C



AIR TUBE LIGHT



SPECS

Model	AT200Bi
Power Supply	100V-240V~50/60Hz 2.1A
Max. Power	≈210W
CCT	2700-8500K
Brightness Range	0%-100%
Dimming Curves	linear, s-curve, exponential, logarithmic
FX Modes	11
CRI	Average≥96
TLCI	Average≥96
Waterproof Grade of Light Body	IP65
Controlling Methods	DMX 512 Control (support RDM protocol), 2.4GHz Wireless Control, Bluetooth APP Control
Bluetooth Controlling Distance	Max. 30m
2.4G Remote Control Distance	Max. 60m
Type-A USB Port	Firmware Upgrade/5V⎓1A Power Supply
Dimension	Light Body: 280mm*267mm*1226mm/11"11"48" (With air bag and in the inflated state, does not include the connection cable.) Controller: 124mm*132mm*270mm
Netweight	Light Body: 2.15kg (Including airbag)/Controller: 2.8kg

Air Tube Light | AT200Bi



Air Tube Light | AT200Bi



180°
180° Light Emission



POWER
200W
200W Output



Multiple Controls



2700~8500K



Detachable Design

AT200Bi

- CCT: 2700K-8500K
- LED mat with an inflatable softbox for soft, even lighting
- Handheld, suspended, or stand-mounted options
- Modular design for easy maintenance
- Multiple control options including DMX512, app control, and wireless remote
- Controls: DMX, App control, and wireless remote
- Maximum power of 210W
- High CRI and TLCI ratings above 96
- IP65 weather-resistant light body
- Sweeping 180° generous beam spread
- AC power and V-mount battery support
- Foldable, lightweight design
- 11 built-in FX lighting effects



AMBIENT LIGHTS



SPECS

Model	C5R	C7R	C10R
Luminance	200Lux @1m (6500K)	101Lux @1m (5500K)	130Lux@1m (5500K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2500K-8500K	2000K-10000K	2000K-10000K
Max. Power	5W	7W	10W
Color Rending	CRI≥96/TLCI≥96	CRI≥96/TLCI≥97	CRI≥96/LCIE≥97
Controls	On-board/App	On-board/App	On-board/App
Built-in Battery	Included	Included	Not included
Power Supply	5V/2A Type-C DC charging/ wireless charging/built-in battery	AC (lamp socket)/5V/ 2.5A Type-C DC charging/built-in battery	AC (lamp socket)/5V/ 3A Type-C DC charging
Dimension	106*68*18mm	73*73*136mm	73*73*136mm
Weight	169g	256g	236g

RGBWW Creative Light/Bulb | C5R/C7R/C10R



RGBWW Creative Light/Bulb | C5R/C7R/C10R



Lightweight



RGBWW



Magnetic stripe
design



Built-in battery



Type-C
wireless charging



Constant power



RGBWW



2000-10000K



Built-in battery
(C7R)

C5R

- Lightweight and portable
- CCT: 2500-8500K
- RGBWW capable
- CRI≥96, TLCI≥97
- Two independent dials for easy adjustment
- Magnetic back for easy attachment
- 39 FX effects for creative lighting
- Built-in 3000mAh lithium battery for 2-hours runtime at full output
- Wireless/Type-C charging
- Controls: Godox Light App, on-board
- Includes a collapsible diffuser
- Available in an 8-light charging kit

C7R/C10R

- Constant power design ensures stable lighting
- CCT: 2000-10000K
- Magenta-green adjustment
- RGBWW capable
- Built-in battery for C7R
- CRI≥96, TLCI≥97
- Quick reset of bluetooth connection via on-board buttons
- Precise control via Godox Light App
- Power supply: AC/DC
- Available in E26 and E27 base options for versatile compatibility
- C7R available in an 8-light charging kit

RGBWW Creative Light/Bulb | C5R/C7R/C10R



Practical lighting



Ambient lighting



Colorful atmosphere

C5R



Light Body x1 Collapsible Diffuser x1 Carry Bag CB50 x1 Coldshoe Base x1 USB Type-c Cable x1

Optional Purchase (for C7R/C10R)



CR-B01 Round Cup Bouncer
CR-LS Magnetic Lamp Socket

RGBWW Creative Light/Bulb | C5R/C7R/C10R



C7R Eight-light Charging Case
E26 Socket: C7R-K8A/E27 Socket: C7R-K8B
C7R-C8/E27 Socket: C7R-C8B

C5R-C8 Eight-light Charging Case for C5R



Charging Case x1
Charging Case Power Cord x1
USB-C Cable x2
D-TAP to DC Adapter Cable x1

Eight-light Charging Case Kit for C7R



Light Body x8 CR-B01 Round Cup Bouncer x8



C7R Eight-light Charging Case x1
E26 Socket: C7R-K8A/E27 Socket: C7R-K8B

C5R-K8 Eight-light Charging Case Kit for C5R



C5R x8
Collapsible Diffuser x8
Charging Case Power Cord x1
Charging Case x1
USB-C Cable x2
D-TAP to DC Adapter Cable x1
Cold Shoe Mount x2

Eight-light Kit for C10R



Light Body x8 CR-B01 Round Cup Bouncer x8




C7R Carry Bag x1
E26 Socket: C10R-K8A/E27 Socket: C10R-K8B

C7R/C10R



Light Body x1 Storage Bag x1 Type-C Cable x1

CINE LIGHTING REFLECTOR

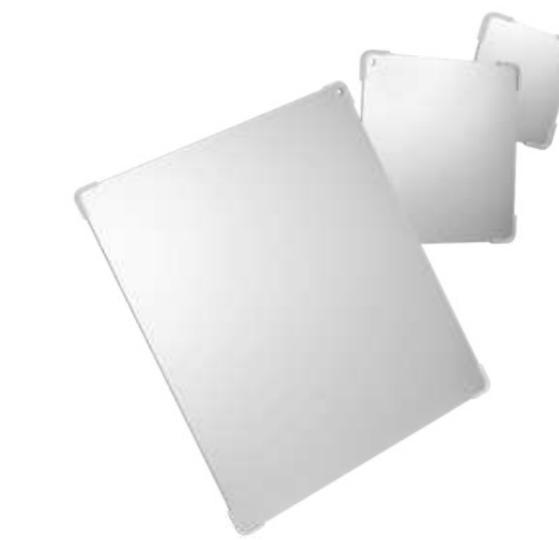

High Reflectance



Four Diffusion
Types



Varied Sizes



Versatile
Applications



Comprehensive
Accessories

LiteFlow 7/15/25/50/100

- Exceptional reflectance with a mere 3% power loss
- A variety of diffused lighting effects: D1/D2/D3/D4
- Five size options: 7×7/15×15/25×25/50×50/100×100 cm
- Sleek rail structure with a guide slot design, ensuring seamless installation
- Leveraging the square inverse law to extend the light path
- Effortless adjustments for convenient control
- Directly utilizing natural sunlight to balance lighting contrast, even without artificial source
- Redirecting a single light source multiple times, reducing the need for additional fixtures and light-shaping tools
- Mimicking natural light decay, guaranteeing even lighting across the illuminated area
- Varying sizes grant you precise control over the illuminated area
- Coming with a comprehensive range of accessories

Cine Lighting Reflector | LiteFlow 7/15/25/50/100



Narrow space lighting



Utilizing sunlight outdoors



With high-output fixtures in low positions

LiteFlow 7



LiteFlow 15



LiteFlow 25




Cine Lighting Reflector | LiteFlow 7/15/25/50/100

LiteFlow 50




LiteFlow 100

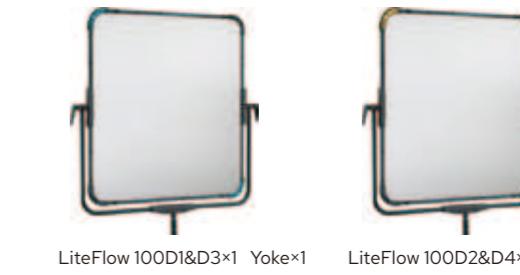

LiteFlow 100 K1



LiteFlow K1/K2

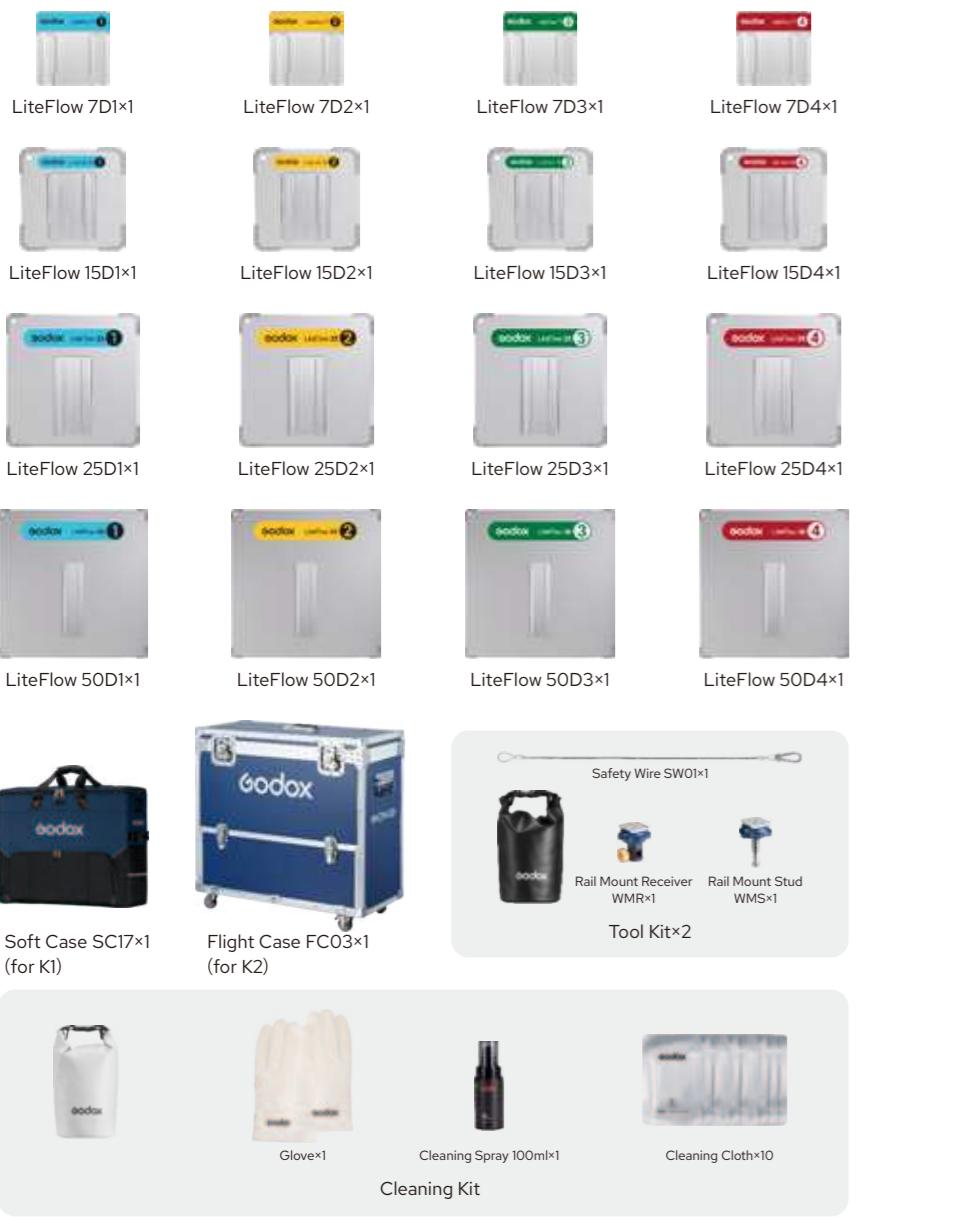

Optional Purchase




Multi-Adapter

Flexible Arm (Important Note: Maximum load 1kg, restricted to use with LiteFlow7/15/25.)


Multi-Reflector Array Grip Kit GK7




Multi-Reflector Array Grip Kit GK5

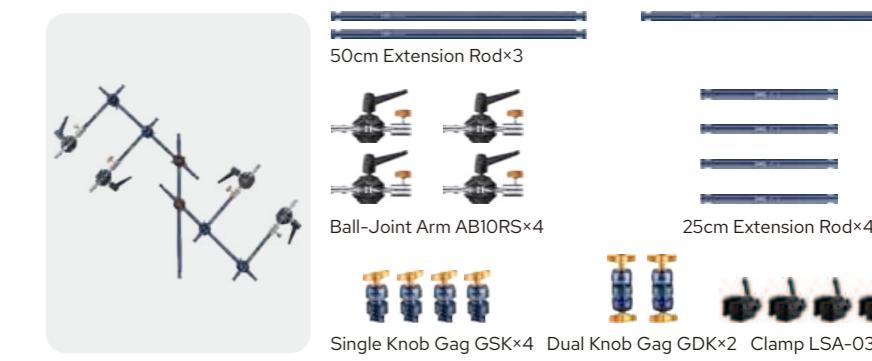

Multi-Reflector Array Grip Kit GK50

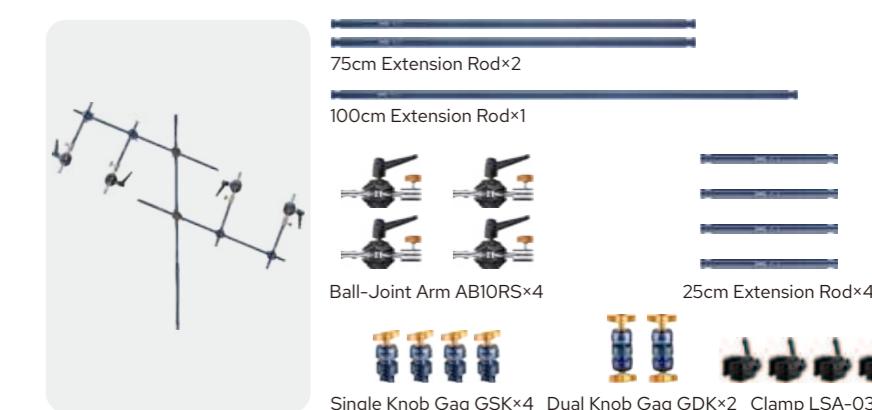

Cleaning Kit CK01

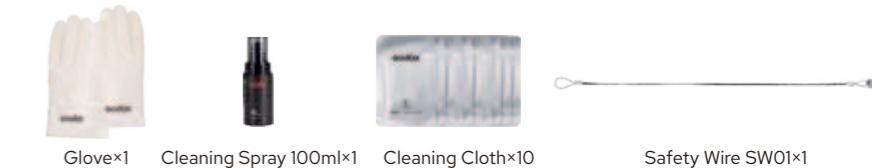

Safety Wire





CONTROL SYSTEM

KNOWLED APP


- Professional lighting control app via tablet
- Cloud scene sharing & fixture bank cloud sync
- Auto-match color blocks to background
- 2 universe available for free
- Multi-threaded lighting effects synchronization
- Manage lights of any brand with a universal DMX protocol
- Seamlessly sync your on-set lights with a virtual grid for exact control
- Customize your fixture library tailored to your needs
- Connectivity Your Way: Choose between Bluetooth-CRMX and Ethernet Art-Net for versatile setup options.



Godox KNOWLED APP



Stable connection with lights of any brand

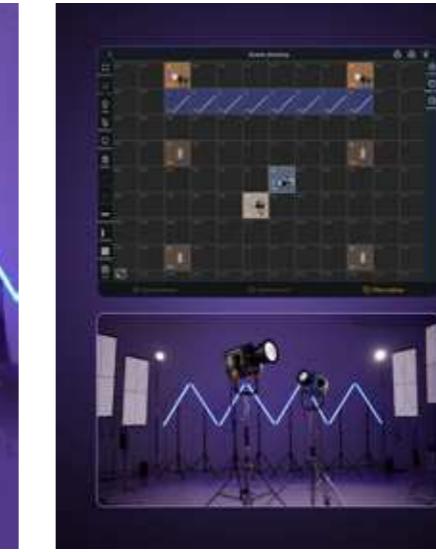

Position fixtures on the grid to match the setup



Wireless Connection - Bluetooth to CRMX



Wired Connection - Ethernet Art-Net

ACCESSORY

BeamLight Max90





BeamLight Max90



BeamLight Max90

- 5° Beam Angle
- Cinematic-grade parallel beam lighting with slow decay
- Incredible throw and illuminance comparable to 12K HMs
- Punchy lighting
- An innovation parallel lighting solution with LiteFlow
- G-Mount Compatibility

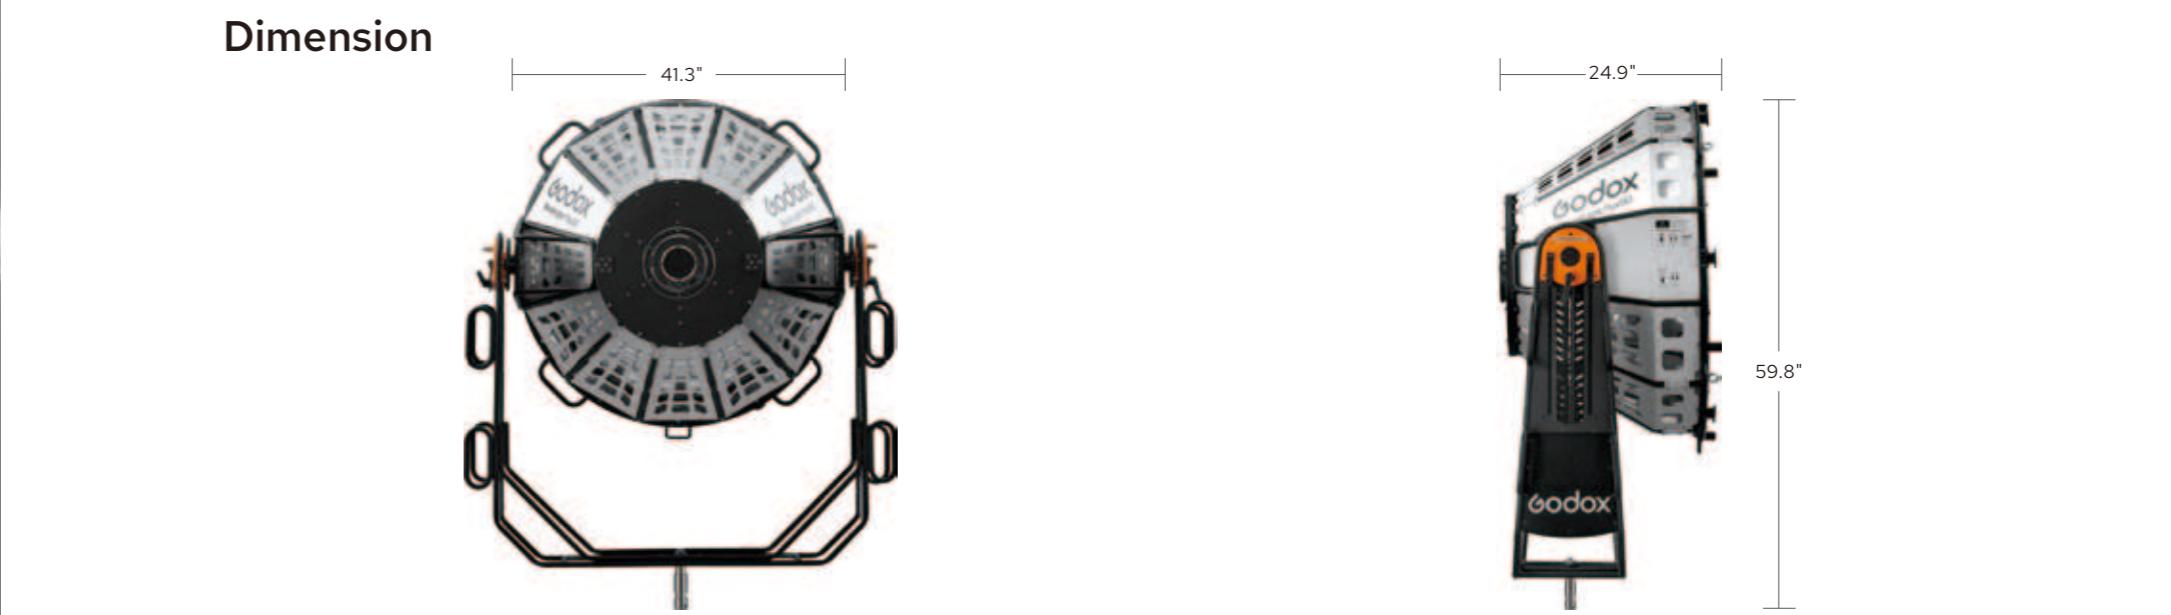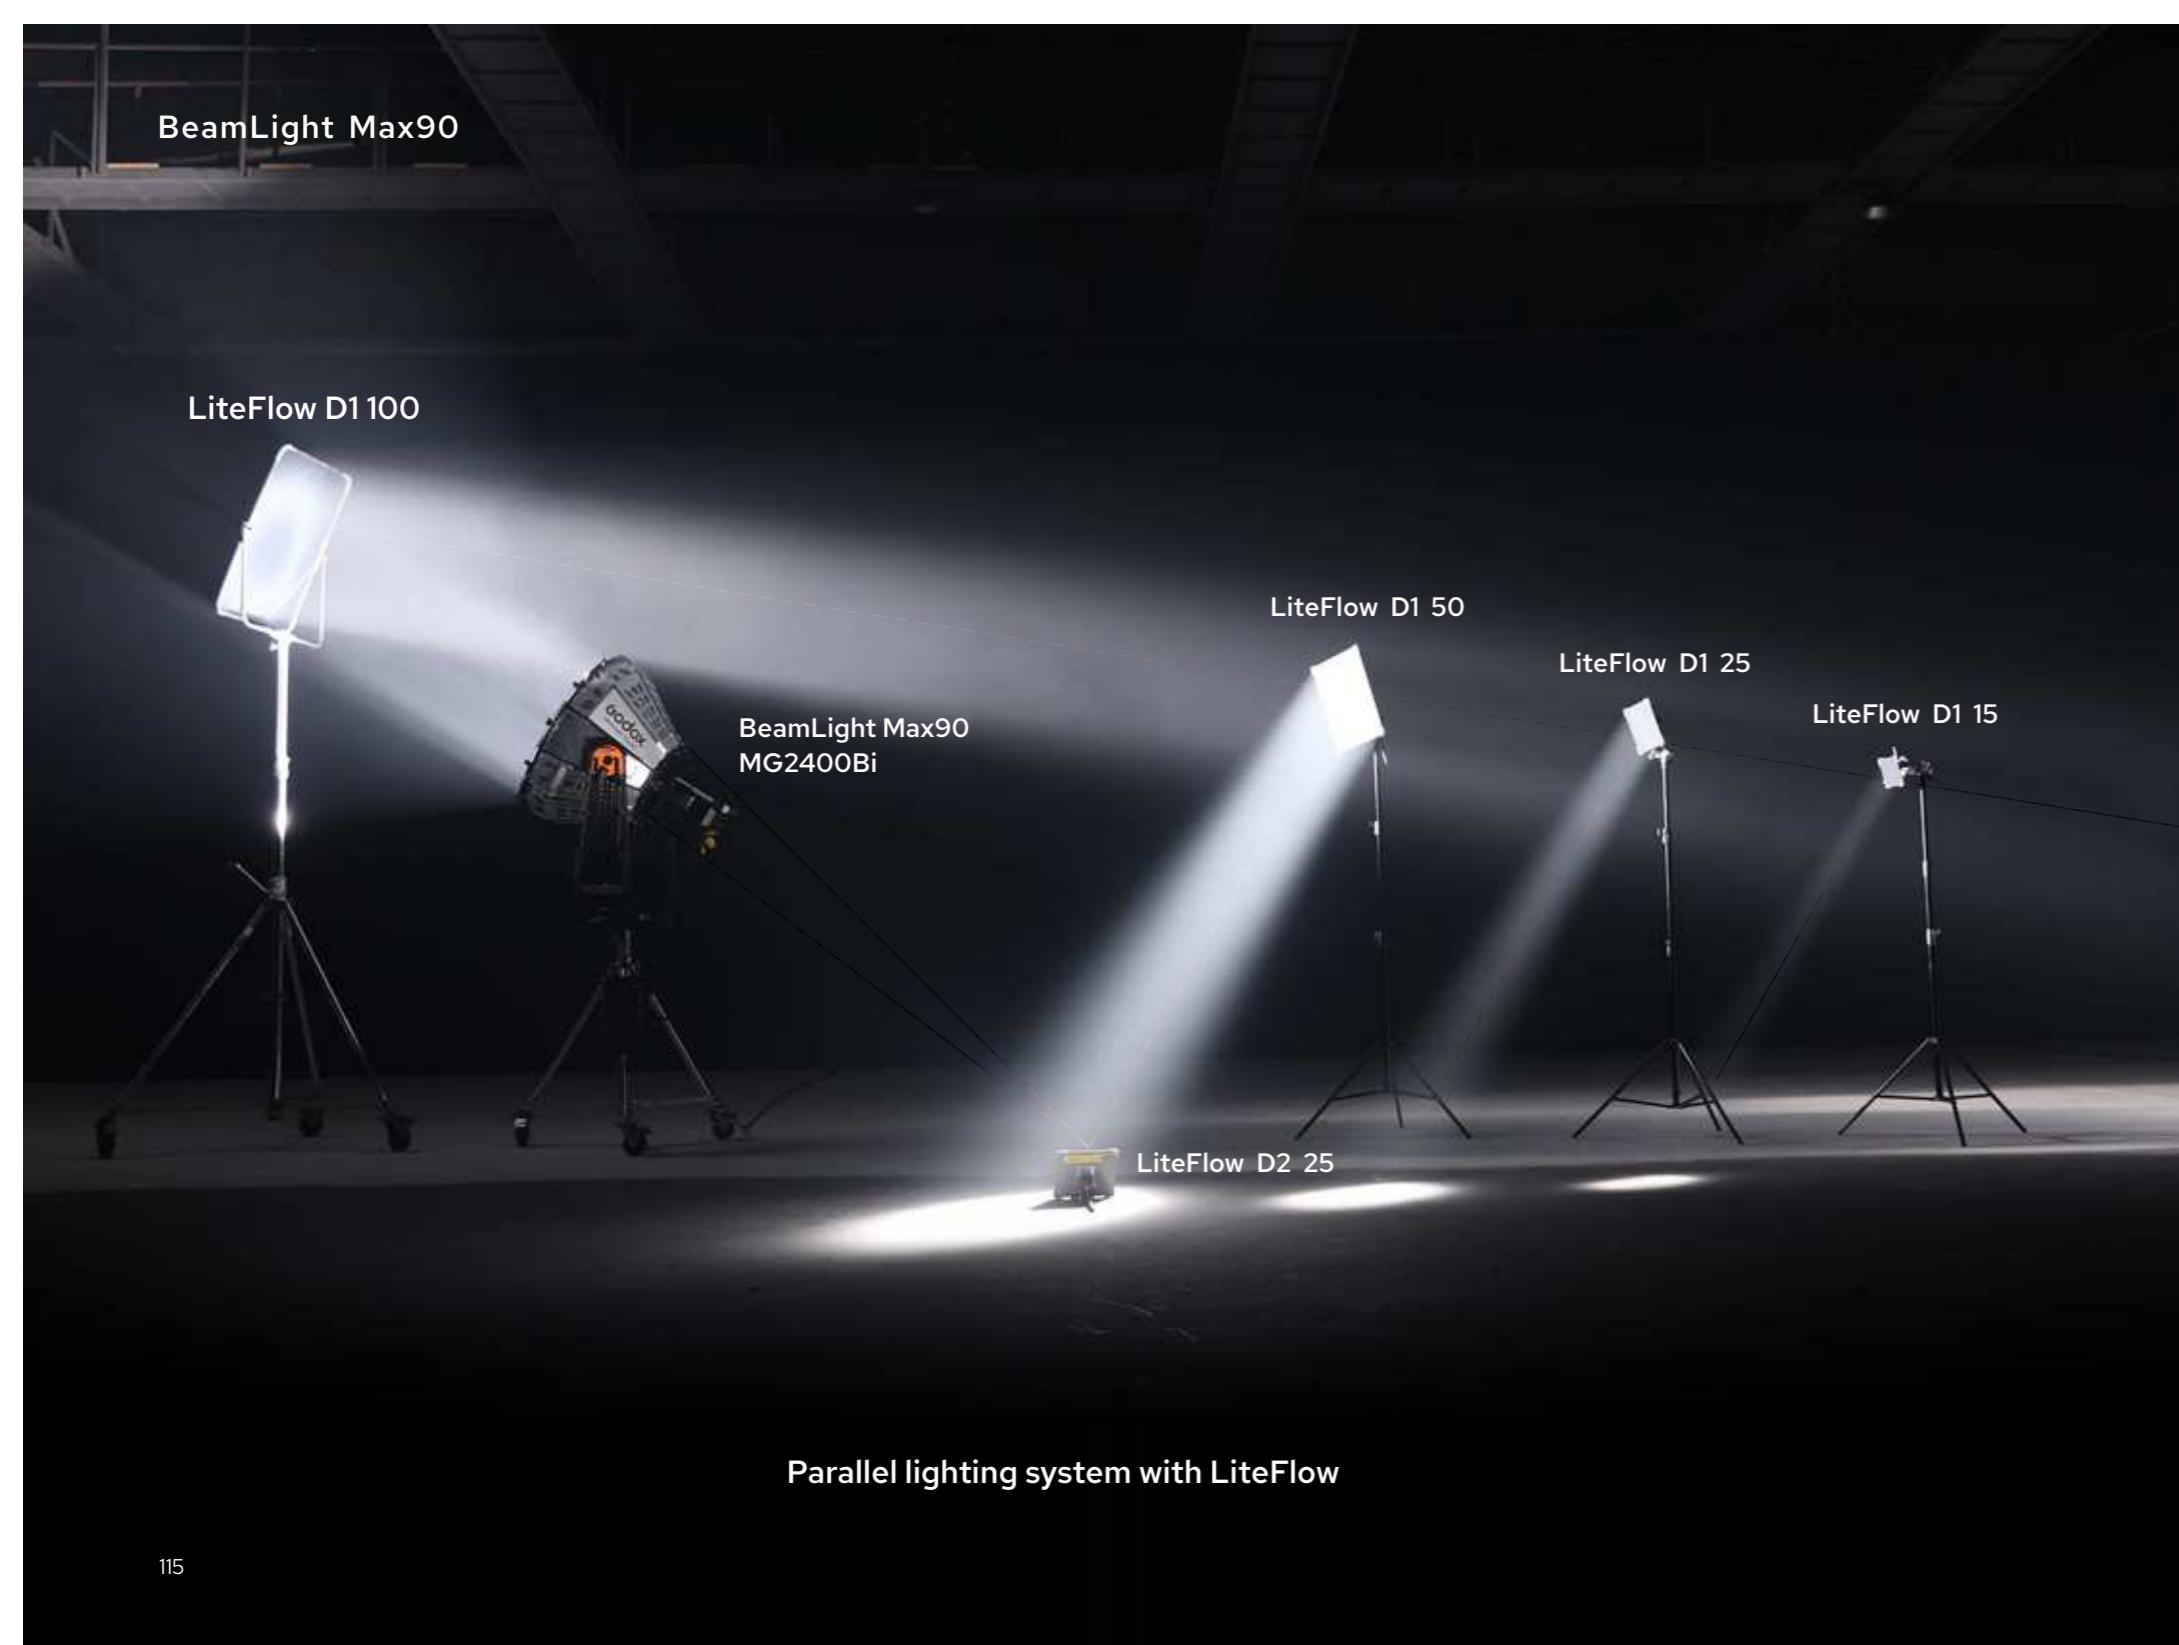

BeamLight B60/Max60



BeamLight B60/Max60



5° Beam



9.8 kg



Protective Housing



Godox Bowens Mount/G-mount

BeamLight B60/Max60

- 5° Narrow Beam
- Parallel Beam System
- Compatible with KNOWLED and G-mount lights
- Easy setup, only 10kg
- Protective housing for long-term use

BeamLight B60/Max60



BeamLight B60/Max60



B60

B60	×1
Spill Control Fabric	×1



Max60


Max60	×1
Spill Control Fabric	×1
Supportrods	×4



Dimension



InsertShield Lens ISL-60
(Not recommended for use with fixture over 240W)

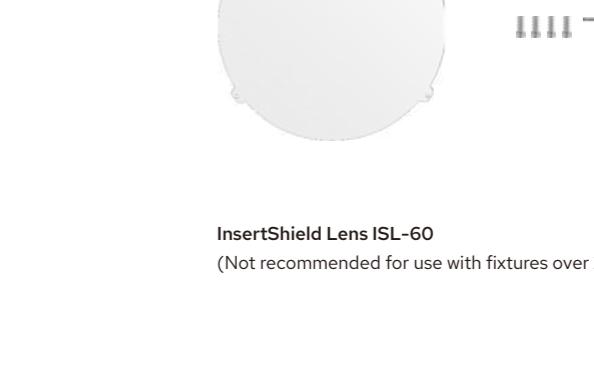

Optional Purchase

G-Mount Projection Attachment | GP19K/26K/36K



GP19K/26K/36K

- Evenly intensifying the illumination by times
- Project a crisp and clear beam without aberration
- Easily realizing versatile lighting effects with various accessories
- The rotatable handle allows more smooth and precise control
- Interchangeable lenses in 19°, 26°, 36°
- Efficient cooling system powered through G-Mount

Tech Specs

Model	Dimension	Weight
Projection attachment	418*647*727mm/16.5*25.5*28.6"(including lens)	≈11.6kg(excluding lens)
Lens 19°	281*235*289mm/11.1*9.3*11.4"	≈9.94kg
Lens 26°	281*235*289mm/11.1*9.3*11.4"	≈8.41kg
Lens 36°	281*234*287mm/11.1*9.2*11.3"	≈8.23kg



GPI9K/26K/36K Projector

Gobo Holder

Gobo Set

Portable Case

Lens

BP-19K/26K/36K

- Works with high-power flat Bowens-mount lights (such as M1000R, M600R, and M600Bi Pro)
- Built-in fan powered directly by the light for active cooling
- Compact and lightweight for easy one-person setup
- 360° rotatable barrel
- Precision optics for sharp, even beams and accurate color
- Three interchangeable lenses: 19°, 26°, 36°



Projector

Gobo Holder(G-ACF)

J-Type Bracket Set

Storage Bag

Gobo Set

Signal Wire

Projection Lens(BP-19K)

Projector

Gobo Holder(G-ACF)

J-Type Bracket Set


Storage Bag

Gobo Set

Signal Wire

Projection Lens(BP-19K)

Flat Bowens Mount Projection Attachment | BP-19K/26K/36K

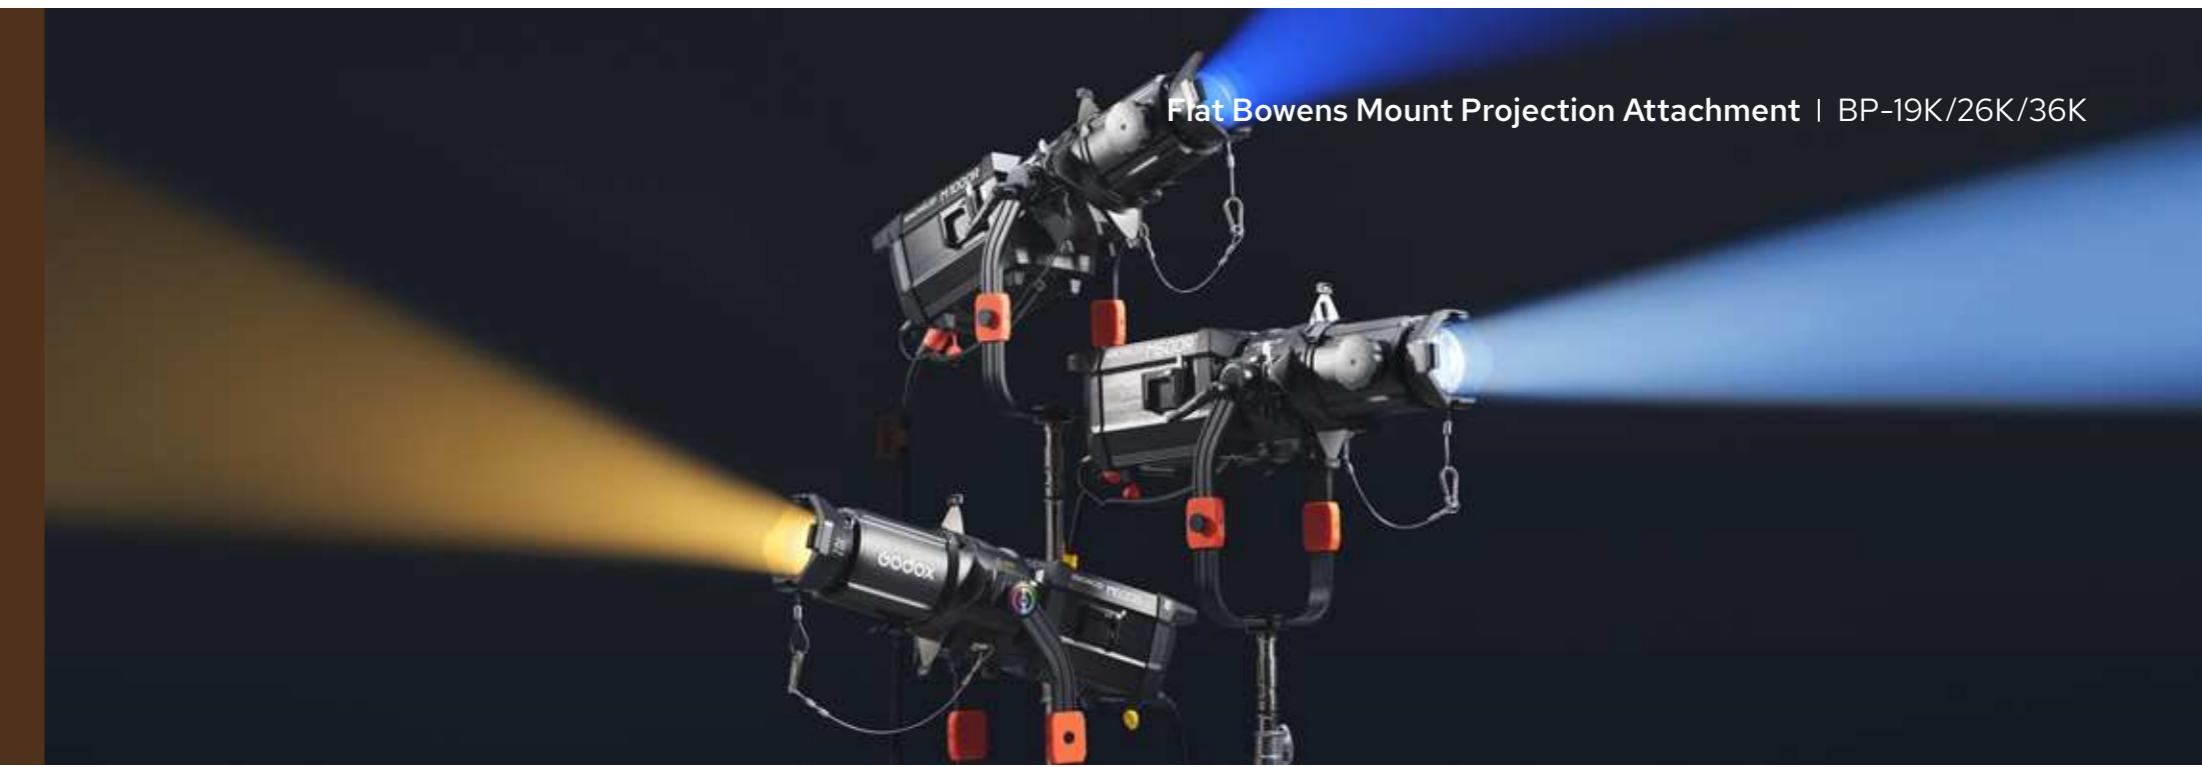

Tech Specs

Model	Dimension	Weight
Projection attachment(excluding lens)	11.93*8.94*8.15"/303*227*207mm	5.4kg
Lens 19°	5.31*8.62*5.39"/135*219*137mm	1.9kg
Lens 26°	5.31*8.62*5.39"/135*219*137mm	1.7kg
Lens 36°	5.31*8.62*5.39"/135*219*137mm	2kg



VSA-19K/26K/36K

- Evenly intensify the illumination
- Project a crisp and clear beam without aberration
- Internal shutter blades for precise beam cutting
- With Gobos to create various backgrounds
- Three interchangeable lenses 19°, 26°, and 36°

Tech Specs

Model	Dimension	Weight
Projection attachment(excluding lens)	516*241*196mm/20.3*9.5*7.7"	3.42kg
Lens 19°	135*219*137mm/5.3*8.6*5.4"	1.94kg
Lens 26°	135*219*137mm/5.3*8.6*5.4"	1.75kg
Lens 36°	135*219*137mm/5.3*8.6*5.4"	1.92kg



DL5 Parallel Booster

- Specifically Designed to Enhance the Performance of the SOBiD
- 5° narrow beam
- Seamless compatibility with daylight, bi-color, and full-coldlights
- Premium Glass Lens Design
- Minimized Stray Light
- Ideal for Precise Light Shaping
- Enhanced Efficiency with LiteFlow System






GF14/FLS8/FLS10


FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

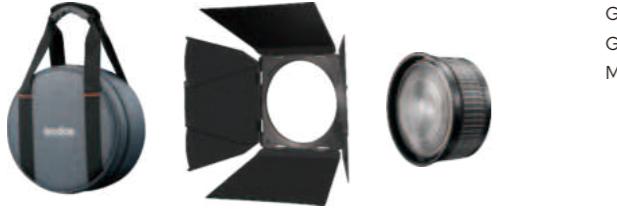

FLS10+LB-02

FLS10 is compatible with all Godox Bowens Mount LED lights.

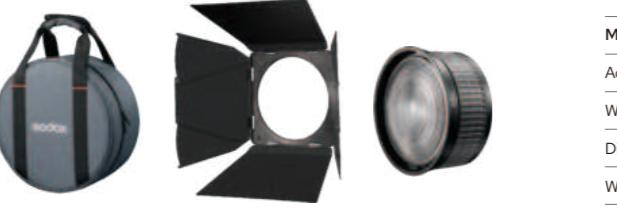

Tech Specs

Mode	FLS8	FLS10	GF14
Adjustable Beam Angle	10°~40°	10°~35°	15°~45°
Working Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	246*246*121mm	295*295*135mm	471*426*235mm
Weight	2kg	3kg	9.68kg

GF14+GF14B

GF14 is compatible with Godox G-Mount LED lights, such as MG1200Bi.




CS-50D/65D/85D




- Extremely fast setup
- Stunning, soft, omni-directional light
- Bowens Mount for compatibility
- Optional skirts for beam spread control



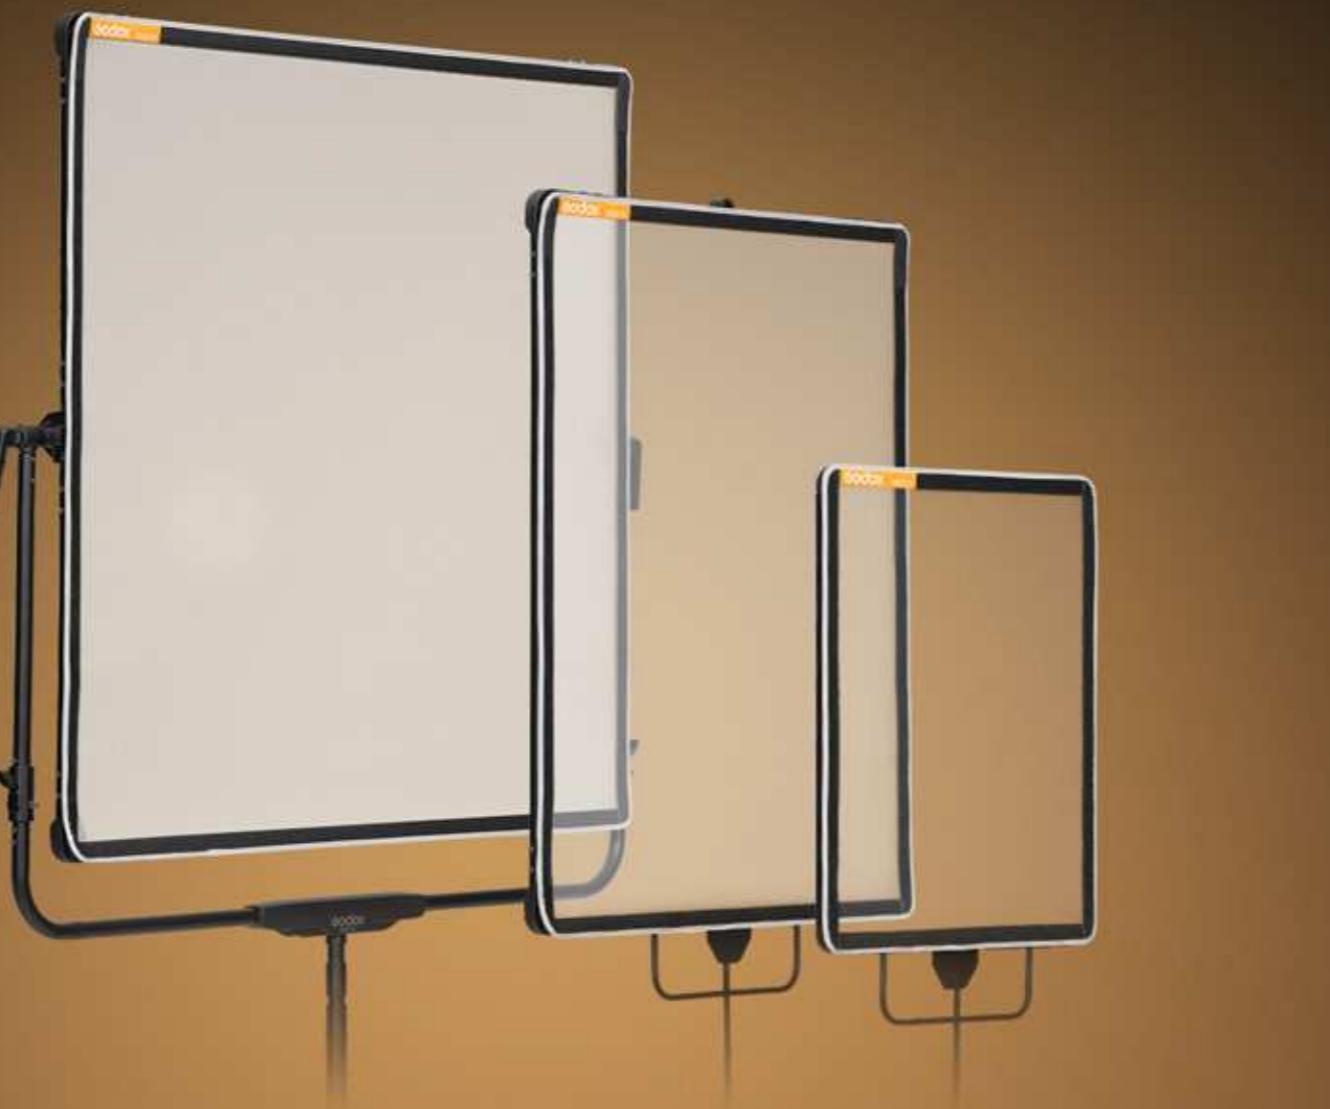

*This product is available for sale only in Asia, Europe, Africa, Oceania, and South America.

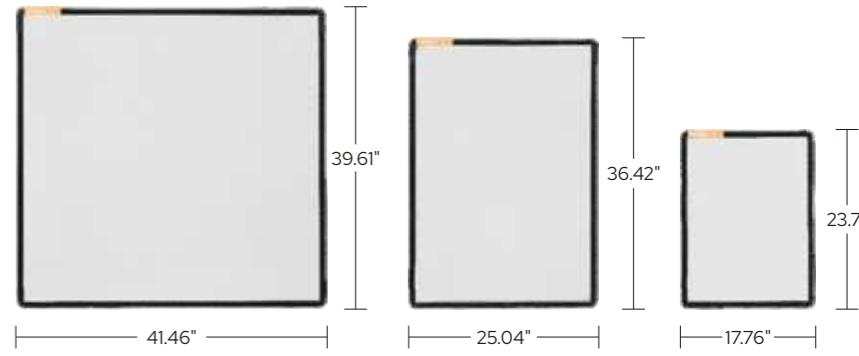

AD21/AD32/AD33

- Motorized diffusion adjustment, hard-to-soft light in seconds
- Two control mode: 0–100% or –0.1 to –2.0 EV
- Power via USB-C, V-mount, or NPF
- Up to 20h runtime (100Wh battery)
- Flicker-free up to 300fps
- Foldable frame for easy setup
- Removable, IP54-rated diffusion panel
- Control via DMX, CRMX, App, or controller
- Lead/Follow mode for multi-panel sync
- Three sizes available

Adjustable Diffusion | AD21/AD32/AD33



0%

25%

50%

75%

100%



Adjustable Diffusion | AD21/AD32/AD33



Level Mode: 0-100% Light Reduction Mode: -0.1 to -2.0 EV



Easy Storage: Collapsible Frame



Removable, Velcro-Attached Diffusion Panel

Two Controller Options



AD00-01



AD00-02

Function/Model	AD00-01	AD00-02
V-Mount Battery Power	✓	
NPF Battery Power		✓
USB-C Power	✓	✓
CRMX	✓	
DMX	✓	✓
Bluetooth	✓	✓
Level Mode(0-100%)	✓	✓
Light Reduction Mode(-0.1 to -2.0 EV)	✓	✓
Speed Adjustment(1-4)	✓	✓
Model Selection	✓	✓
Frequency Adjustment	✓	✓
Lead/Follow Mode	✓	✓

Adjustable Diffusion | AD21/AD32/AD33



AD21 K2

Adjustable Diffusion AD21-01	×1	USB-C Data Cable	×1
Bracket AD21-02	×1	Storage Bag	×1
Controller AD00-01	×1	D-TAP to USB-C Adapter Cable	×1
AC Signal Control Cable	×1		



AD32 K2

Adjustable Diffusion AD32-01	×1	Tube	×1
Bracket AD32-02	×1	D-TAP to USB-C Adapter Cable	×1
Reel	×1	USB-C Data Cable	×1
AC Signal Control Cable	×1	Storage Bag	×1
Controller AD00-01	×1		



AD33 K2

Adjustable Diffusion AD33-01	×1	Tube	×1
Bracket AD33-02	×1	D-TAP to USB-C Adapter Cable	×1
Reel	×1	USB-C Data Cable	×1
AC Signal Control Cable	×1	Storage Bag	×1
Controller AD00-01	×1		



AD21 K3

Adjustable Diffusion AD21-01	×1	AC Signal Control Cable	×1
Bracket AD21-02	×1	Storage Bag	×1
Controller AD00-02	×1		



AD32 K3

Adjustable Diffusion AD32-01	×1	Controller AD00-02	×1
Bracket AD32-02	×1	Tube	×1
Reel	×1	Storage Bag	×1
AC Signal Control Cable	×1		



AD33 K3

Adjustable Diffusion AD33-01	×1	Controller AD00-02	×1
Bracket AD33-02	×1	Tube	×1
Reel	×1	Storage Bag	×1
AC Signal Control Cable	×1		

Scrim Flag | SF6090/SF4560 Kit



Scrim Flag | SF6090/SF4560 Kit



SF6090/SF4560 Kit

- Two versions to meet various size needs.
- Easy to store and transport with the carry case.
- Compact and foldable, making setup and usage easy.
- The black nets and one-stop silk can be used to adjust the contrast.
- The black solid fabric can be used to block unwanted illumination or create shadows.
- The two-stop silk can be used to diffuse and soften the light.
- The dots and fingers in black net and solid fabrics allow for shaping light on small objects or areas. Ideal for tabletop shooting or situations where larger fabrics are inconvenient.
- The open-edge design provides a softer cut of light and prevents hard transitions due to the edge.
- By finely adjusting the angle of the screen in front of the light, it allows for very changeable light and dark contrast, creating the desired transition.



QR-P70/P90/P120


- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible



Effortless Setup



Quick Breakdown

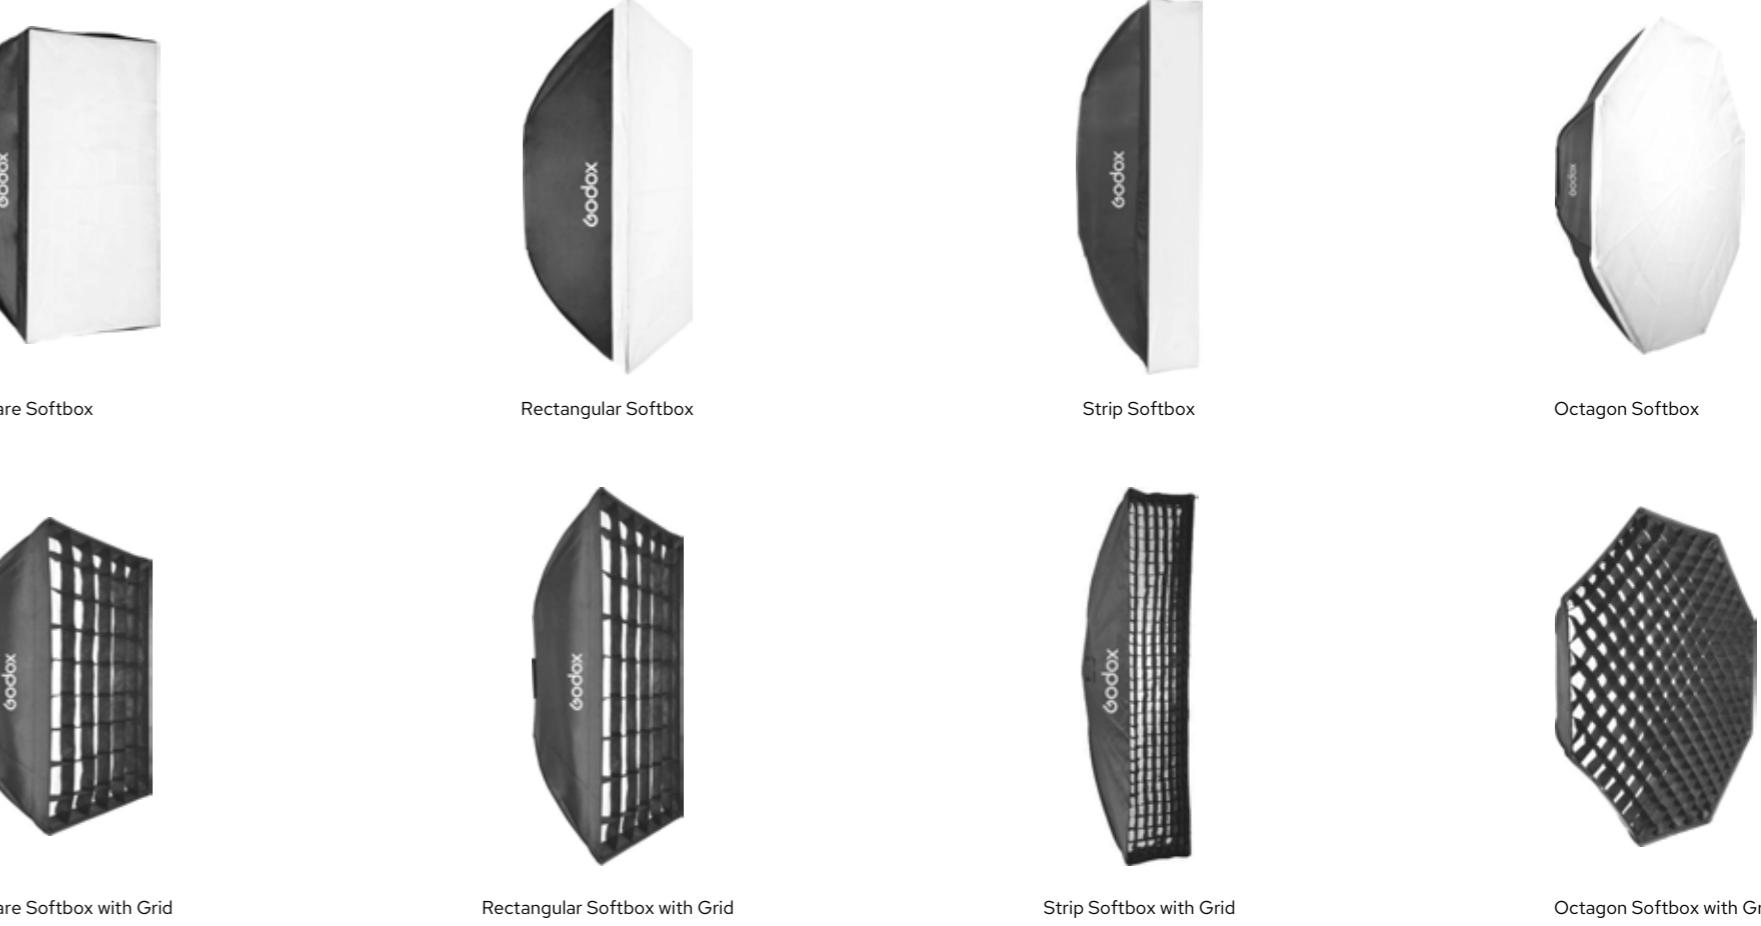

SPECS

	Square Softbox	Rectangular Softbox	Strip Softbox	Octagon Softbox
Model	SB-BW-6060/9090	SB-BW-6090/70100/80120	SB-FW-50130/35160	SB-FW-95120/140
Size	60x60cm(23.6"x23.6") 90x90cm(35.4"x35.4")	60x90cm(23.6"x35.4")/70x100cm(27.6"x39.4") 80x120cm(31.5"x47.2")	50x130cm(23.6"x51.2")	φ95cm(37.4")/120cm(47.2") φ140cm(55.1")

Lighting Stands & Mountings

SA5015

Heavy Duty Steel Roller Stand

 168cm  92cm  10.4kg  40kg



240CS

C-Stand with Arm (Silver)

 95cm  130cm  237cm  158cm  6kg
 10kg  25mm  35/30/25mm



SA5045

Heavy Duty Steel Roller Stand

 450cm  146cm  16.2kg  40kg



270CS

C-Stand with Arm (Silver)

 95cm  140cm  270cm  168cm  6.3kg
 10kg  25mm  35/30/25mm

